

High Efficiency, Built-in Inductor, 1.7MHz, 2A, 23V Input Synchronous Step Down Regulator

General Description


The SY20652 is a high efficiency 1.7MHz synchronous step-down DC/DC converter capable of delivering 2A current, which integrates an inductor into a compact 3×3×2mm QFN package. The SY20652 operates over a wide input voltage range from 4.5V to 23V and integrates main switch and synchronous switch with very low $R_{DS(ON)}$ to minimize the conduction loss.

SY20652 features adjustable soft-start time, enable control and power good indicator for system sequence control. The device also provides cycle-by-cycle current limit, short circuit protection and thermal shutdown protection for reliable operation.

Features

- low $R_{DS(ON)}$ for Internal Switches (Top/Bottom): 105mΩ/50mΩ
- 4.5-23V Input Voltage Range
- 2A Output Current Capability
- 1.7MHz Switching Frequency
- Instant PWM Architecture to Achieve Fast Transient Responses
- Cycle-by-cycle Peak Current Limitation
- Adjustable soft-start Time
- Hic-cup Mode Output Short Circuit Protection
- $\pm 1.5\%$ 0.6V Reference
- Power Good Indicator
- QFN3×3-10 Package

Ordering Information

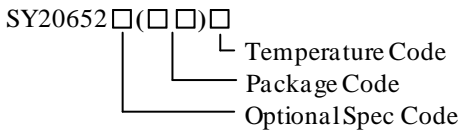

Ordering Number	Package type	Note
SY20652QNC	QFN3×3-10	--

Applications

- Set Top Box
- Portable TV
- Access Point Router
- DSL Modem
- LCD TV

Typical Applications


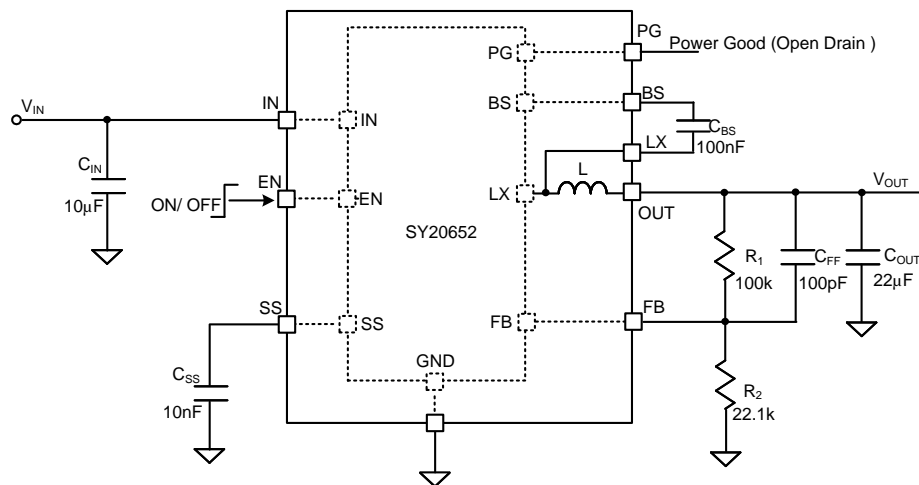


Figure1. Schematic Diagram

Pinout (top view)

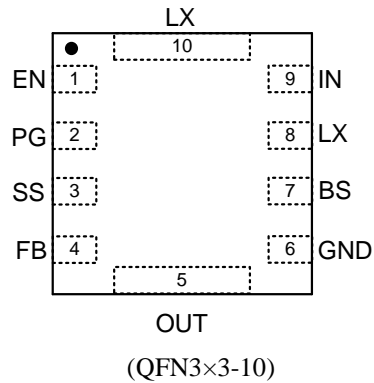

Top Mark: **BGBxyz** (Device code: **BGB**; *x=year code, y=week code, z=lot number code*)

Pin Name	Pin Number	Pin Description
EN	1	Enable control. Pull high to turn on. Do not leave it floating.
PG	2	Open drain power good indicator. Externally pull high when the output is in regulation range. Otherwise pull low.
SS	3	Soft-start programming pin. Connect a capacitor from this pin to ground to program the soft-start time. $t_{SS}=C_{SS}\times 0.6V/5\mu A$. Leave this pin open for default 1ms soft-start.
FB	4	Output Feedback Pin. Connect this pin to the center point of the output resistor divider (as shown in figure 1) to program the output voltage: $V_{OUT}=0.6\times(1+R_1/R_2)$.
OUT	5	Output pin. Decouple this pin to ground with at least a 10 μ F MLCC.
GND	6	Ground pin.
BS	7	Boot-Strap Pin. Supply high side gate driver. Decouple this pin to LX pin with a 0.1 μ F ceramic cap.
LX	8,10	Inductor pin. Connect this pin to the switching node of inductor.
IN	9	Input pin. Decouple this pin to GND pin with at least a 1 μ F ceramic cap.



Block Diagram

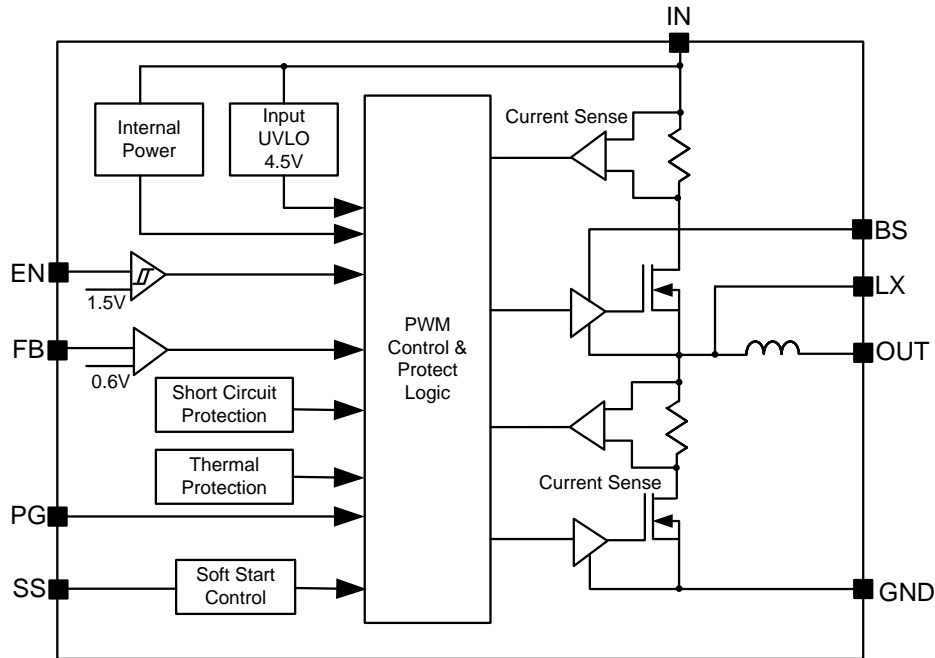


Figure2. Block Diagram

Absolute Maximum Ratings (Note 1)

Supply Input Voltage	-----	25V
BS-LX, SS	-----	4V
All other pins	-----	VIN + 0.3V
Power Dissipation, Pd @ TA = 25°C, QFN3×3-10(Note 2)	-----	2.2W
Package Thermal Resistance (Note 2)		
θJA	-----	56°C/W
θJC	-----	7.5°C/W
Junction Temperature Range	-----	150°C
Lead Temperature (Soldering, 10 sec.)	-----	260°C
Storage Temperature Range	-----	-65°C to 150°C

Recommended Operating Conditions (Note 3)

Supply Input Voltage	-----	4.5V to 23V
Junction Temperature Range	-----	-40°C to 125°C
Ambient Temperature Range	-----	-40°C to 85°C

**Electrical Characteristics**(V_{IN} = 12V, V_{OUT} = 3.3V, C_{OUT} = 22μF, T_A = 25°C, I_{OUT} = 1A, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V _{IN}		4.5		23	V
Quiescent Current	I _Q	I _{OUT} =0, V _{FB} =V _{REF} ×105%		115		μA
Shutdown Current	I _{SHDN}	EN=0		6.5	10	μA
Feedback Reference Voltage	V _{REF}		0.591	0.6	0.609	V
Top FET RON	R _{DS(ON)1}			105		mΩ
Top FET Peak Current Limit	I _{LIM, TOP}	Note 4		4.5		A
Bottom FET RON	R _{DS(ON)2}			50		mΩ
Bottom FET Valley Current Limit	I _{LIM, BOT}		2.7	3.3	3.9	A
EN Rising Threshold	V _{ENH}		1.5			V
EN Falling Threshold	V _{ENL}				0.4	V
Power Good Threshold	V _{PG}	V _{FB} falling, PG from high to low		90		% V _{REF}
		V _{FB} rising, PG from low to high		95		% V _{REF}
		V _{FB} rising, PG from high to low		115		% V _{REF}
		V _{FB} falling, PG from low to high		110		% V _{REF}
Power Good Delay Time	t _{PG_F}	Note 4, PG falling edge		10		μs
	t _{PG_R}	Note 4, PG rising edge		60		μs
Oscillator Frequency	F _{OSC}			1.7		MHZ
Soft-start Charging Current	I _{SS}			5		μA
Short Circuit Protection Wait Time	t _{WAIT, SCP}	Note 4		3		ms
Short Circuit Protection Off Time	t _{OFF, SCP}	Note 4		15		ms
Input UVLO Threshold	V _{UVLO}				4.5	V
Input UVLO Hysteresis	V _{HYS}			0.3		V
Min ON Time		Note 4		80		ns
Min OFF Time		Note 4		160		ns
Thermal Shutdown Temperature	T _{SD}	Note 4		150		°C
Thermal Shutdown Hysteresis	T _{HYS}	Note 4		15		°C

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 2: P_D, θ_{JA}, θ_{JC} is measured in the natural convection at T_A = 25°C on a two-layer Silergy Evaluation Board.


Note 3: The device is not guaranteed to function outside its operating conditions.

Note 4: Design Guarantee.




Typical Performance Characteristics


Efficiency vs. Output Current

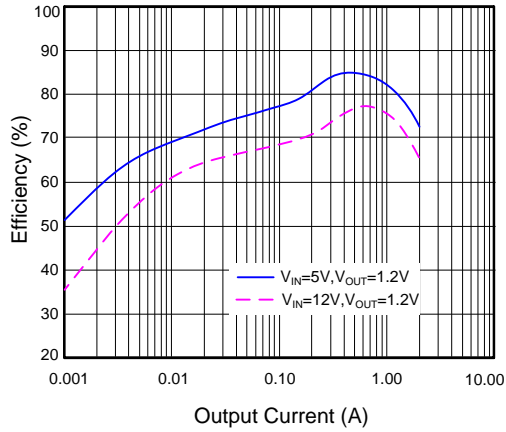


Efficiency vs. Output Current

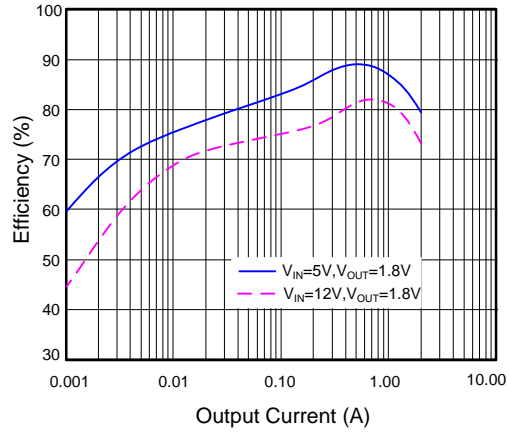

Efficiency vs. Output Current

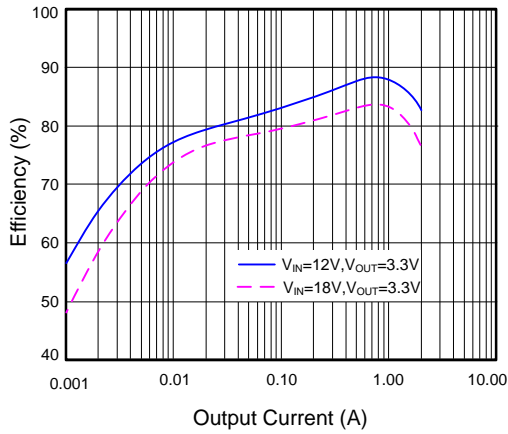


Efficiency vs. Output Current

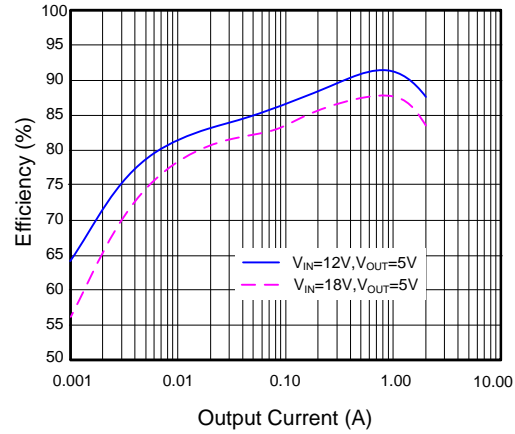

Load Transient


($V_{IN}=12V, V_{OUT}=3.3V, I_{OUT}=0-1A$)

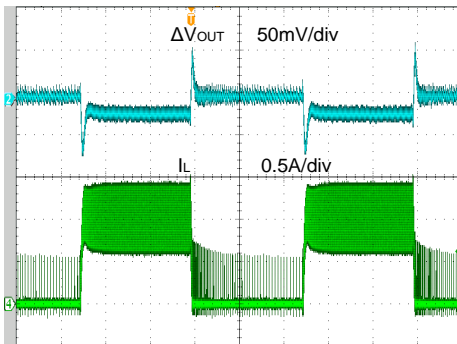

Time (200 μ s/div)

Load Transient


($V_{IN}=12V, V_{OUT}=3.3V, I_{OUT}=0.2-2A$)

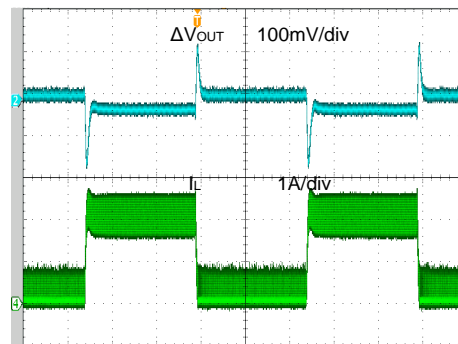

Time (200 μ s/div)

Startup from Enable


($V_{IN}=12V$, $V_{OUT}=3.3V$, $I_{OUT}=2A$)

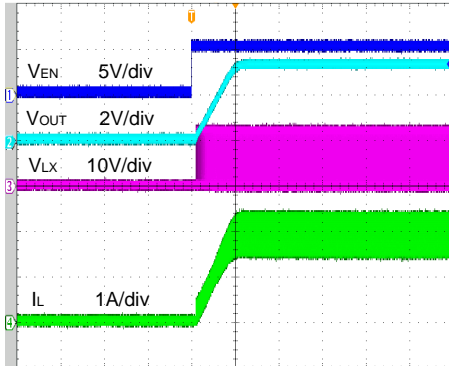

Time (800µs/div)

Shutdown from Enable


($V_{IN}=12V$, $V_{OUT}=3.3V$, $I_{OUT}=2A$)

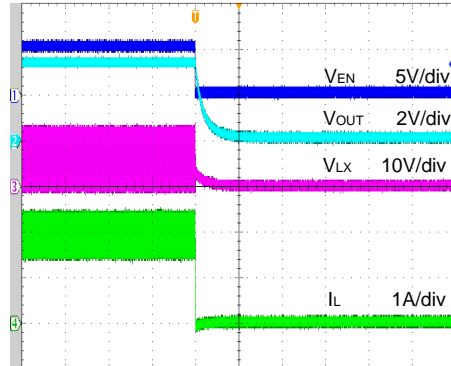

Time (200µs/div)

Short Circuit Protection


($V_{IN}=12V$, $V_{OUT}=3.3V$, 0A to Short)

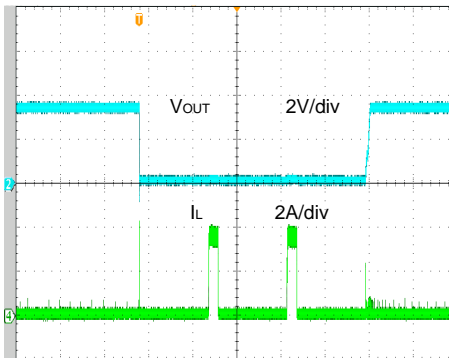

Time (10ms/div)

Short Circuit Protection


($V_{IN}=12V$, $V_{OUT}=3.3V$, 2A to Short)

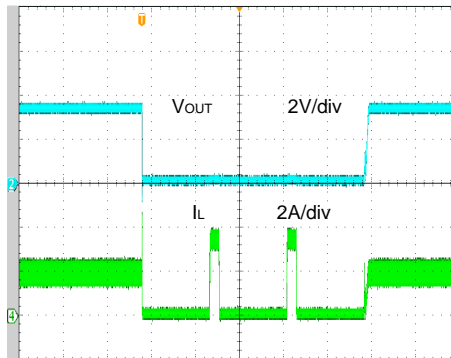

Time (10ms/div)

Output Ripple

($V_{IN}=12V$, $V_{OUT}=3.3V$, $I_{OUT}=2A$)

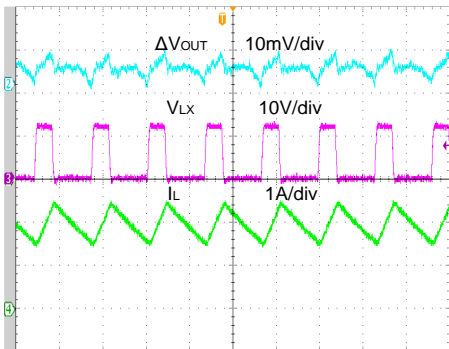

Time (400ns/div)



Operation

The SY20652 is a high efficiency 1.7MHz synchronous step down DC/DC converter capable of delivering 2A current. The SY20652 operates over a wide input voltage range from 4.5V to 23V and integrates main switch and synchronous switch with very low $R_{DS(ON)}$ to minimize the conduction loss.

SY20652 features adjustable soft-start time, enable control and power good indicator for system sequence control. The device also provides cycle-by-cycle current limit, short circuit protection and thermal shutdown protection for reliable operation.


Applications Information

Because of the high integration in the SY20652, the application circuit based on this regulator is rather simple. Only input capacitor C_{IN} , output capacitor C_{OUT} and feedback resistors (R_1 and R_2) need to be selected for the targeted applications specifications.

Feedback Resistor Dividers R_1 and R_2 :

Choose R_1 and R_2 to program the proper output voltage. To minimize the power consumption under light loads, it is desirable to choose large resistance values for both R_1 and R_2 . A value of between 10k Ω and 1M Ω is highly recommended for both resistors. If V_{OUT} is 3.3V, $R_1=100k$ is chosen, then using following equation, R_2 can be calculated to be 22.1k:

$$R_2 = \frac{0.6V}{V_{OUT} - 0.6V} R_1$$



Input Capacitor C_{IN} :

The ripple current through input capacitor is calculated as:

$$I_{CIN_RMS} = I_{OUT} \cdot \sqrt{D(1-D)}$$

To minimize the potential noise problem, we place a typical X5R or a better grade ceramic capacitor really close to the IN and GND pins. Care should be taken


to minimize the loop area formed by C_{IN} , and IN/GND pins. In this case, a 10 μ F low ESR ceramic capacitor is recommended.

Output Capacitor C_{OUT} :

The output capacitor is selected to handle the output ripple noise requirements. Both steady state ripple and transient requirements must be taken into consideration when selecting this capacitor. For the best performance, it is recommended to use X5R or a better grade ceramic capacitor greater than 10 μ F capacitance.


External Bootstrap Cap

This capacitor provides the gate driver voltage for internal high side MOSEFET. A 100nF low ESR ceramic capacitor connected between BS pin and LX pin is recommended.



Load Transient Considerations:

The SY20652 regulator integrates the compensation components to achieve good stability and fast transient responses. In some applications, adding a ceramic capacitor in parallel with R_1 may further speed up the load transient responses and it is recommended for applications with large load transient step requirements.

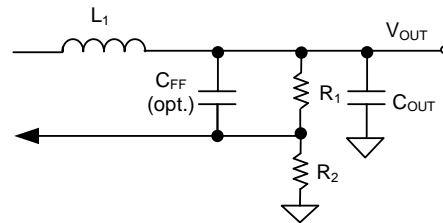

Soft-start:

The SY20652 provides programmable soft-start time feature. The minimum soft-start time is 1ms typically when SS pin is floating. Connect a capacitor across SS pin and GND to program the soft-start time.

$$t_{SS}(ms) = C_{SS}(nF) \times 0.6V / 5\mu A$$

Power Good Indication

PG is an open-drain output pin. This pin will pull to ground if output voltage is lower than 95% or higher than 115% of regulation voltage. Otherwise this pin will go to a high impedance state.

Layout Design:

The layout design of SY20652 regulator is relatively simple. For the best efficiency and minimum noise problem, we should place the following components close to the IC: C_{IN} , R_1 and R_2 .

- 1) It is desirable to maximize the PCB copper area connected to GND pin to achieve the best thermal and noise performance. If the board space allowed, a ground plane is highly desirable.
- 2) C_{IN} must be close to Pins IN and GND. The loop area formed by C_{IN} and GND must be minimized.
- 3) The PCB copper area associated with LX pin must be minimized to avoid the potential noise problem.
- 4) The components R_1 and R_2 , and the trace connected to the FB pin must NOT be adjacent to the LX net on the PCB layout to avoid the noise problem.
- 5) If the system chip interfacing with the EN pin has a high impedance state at shutdown mode

and the IN pin is connected directly to a power source such as a Li-Ion battery, it is desirable to add a pull down $1M\Omega$ resistor between the EN and GND pins to prevent the noise from falsely turning on the regulator at shutdown mode.

PCB Layout Suggestion:



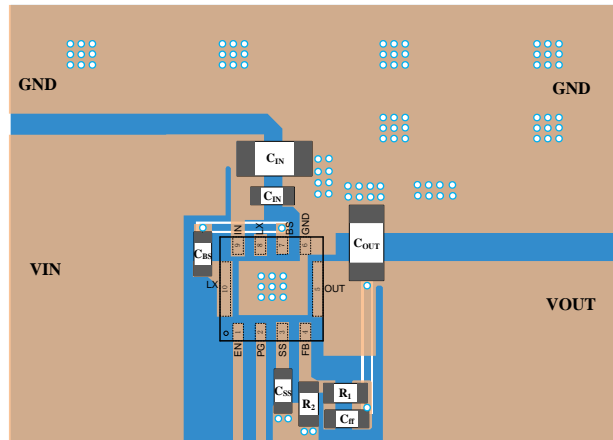


Figure3. PCB Layout Suggestion


QFN3×3-10 Package Outline

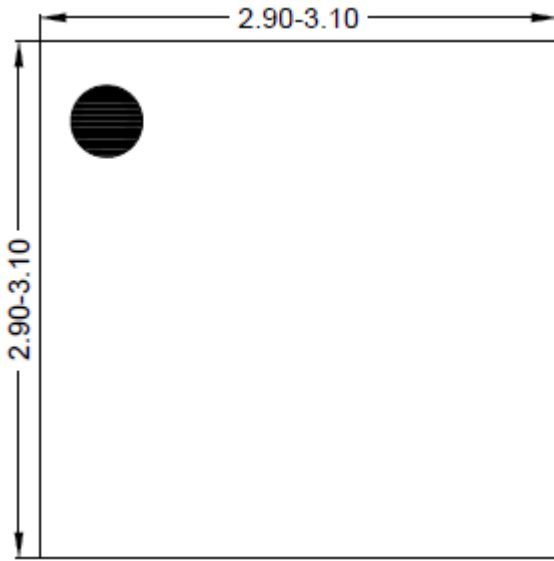


Top View

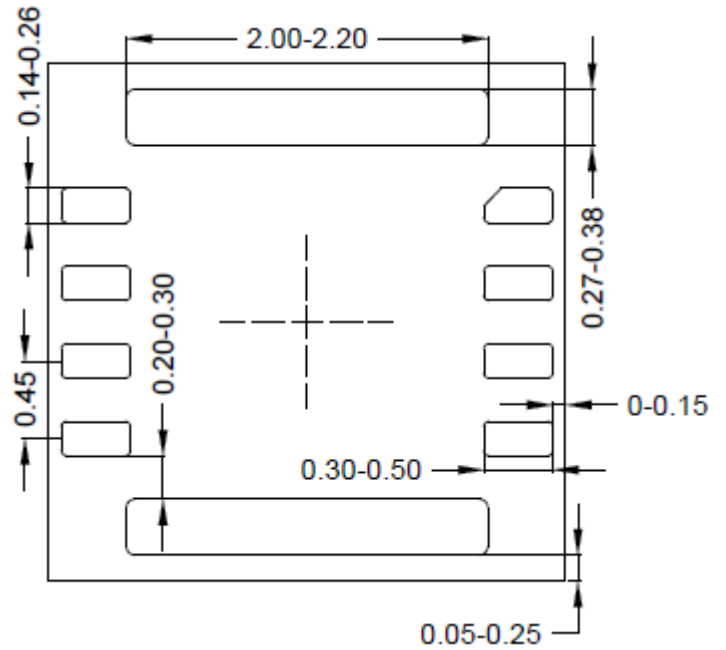

Bottom View

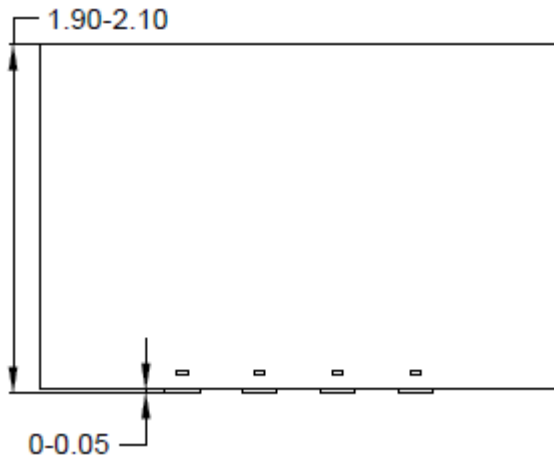

Side View

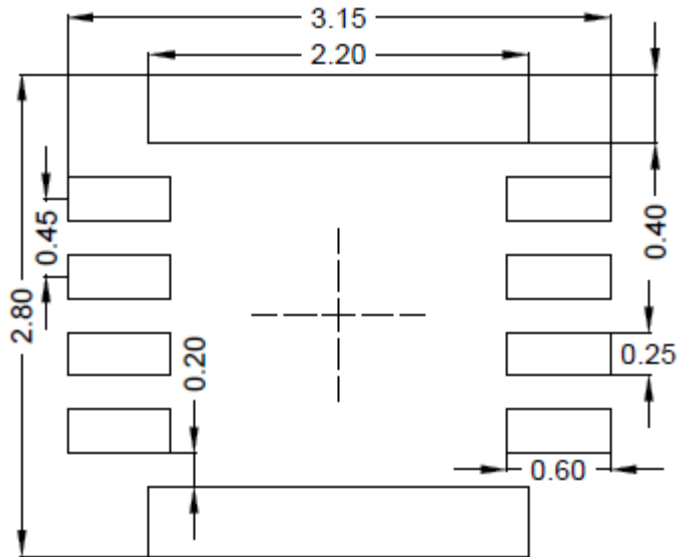


**Recommended PCB Layout
(Reference only)**


Notes: All dimension in millimeter and exclude mold flash & metal burr.

Taping & Reel Specification

1. QFN3×3 taping orientation

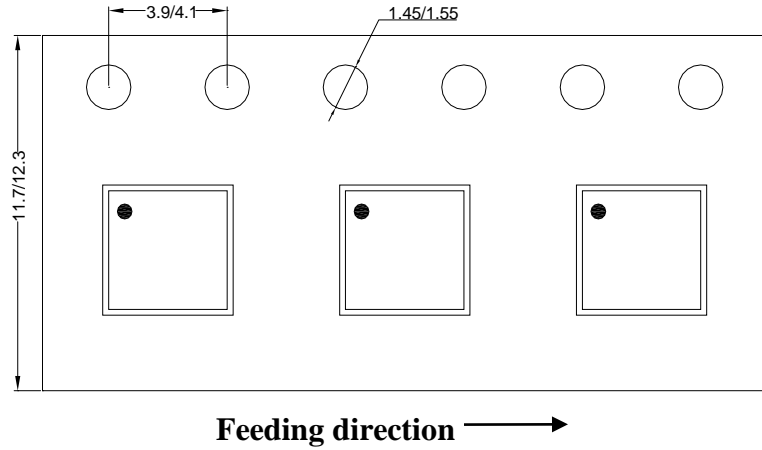

2. Carrier Tape & Reel specification for packages

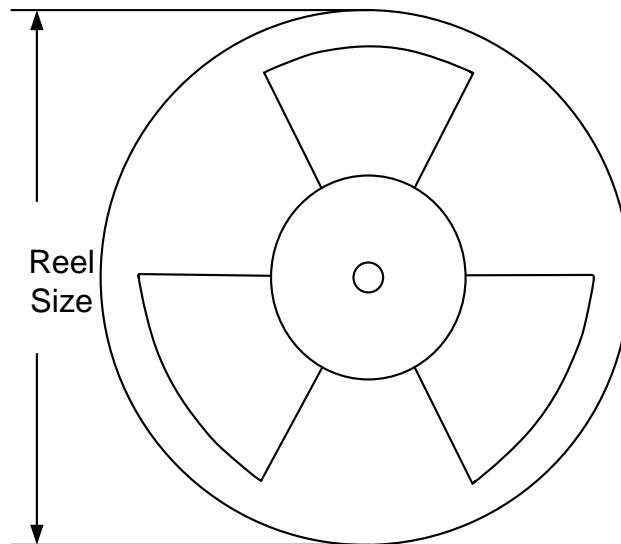

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel
QFN3×3	12	8	13"	400	400	3000

3. Others: NA

IMPORTANT NOTICE

- 1. Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
- 2. Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
- 3. Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
- 4. Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
- 5. Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
- 6. No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2018 Silergy Corp.

All Rights Reserved.