

General Description

The SY20808C20/D20 is an ultra-low $R_{DS(ON)}$ switch. It operates over an input voltage range of 2.5V to 5.5V. It has a current limit to protect the power source from overcurrent and short-circuit conditions.

Active high or low polarity options for enabling the part are available for flexibility.


The SY20808C20/D20 incorporates soft-start, overtemperature protection and reverse blocking functions. The OCB open-drain fault indicator can be used to signal the event to a system host.

The device is available in a standard SOT23-5 package.

Features

- Input Voltage: 2.5V to 5.5V
- Quiescent Current I_Q 35 μ A (typ.)
- Shutdown Current I_{SHDN} 0.1 μ A (typ.)
- Overtemperature Shutdown and Automatic Retry
- Reverse Blocking (No Body Diode)
- At Shutdown, OUT can be Forced Higher than IN
- Fault Flag (OCB) Output for Overcurrent and Fault Conditions
- Automatic Output Discharge at Shutdown
- Built-In Soft-Start
- 1.6ms Rise Time at 3.3V_{IN} Conditions
- RoHS Compliant and Halogen Free
- Compact Package: SOT23-5

Typical Application Circuit

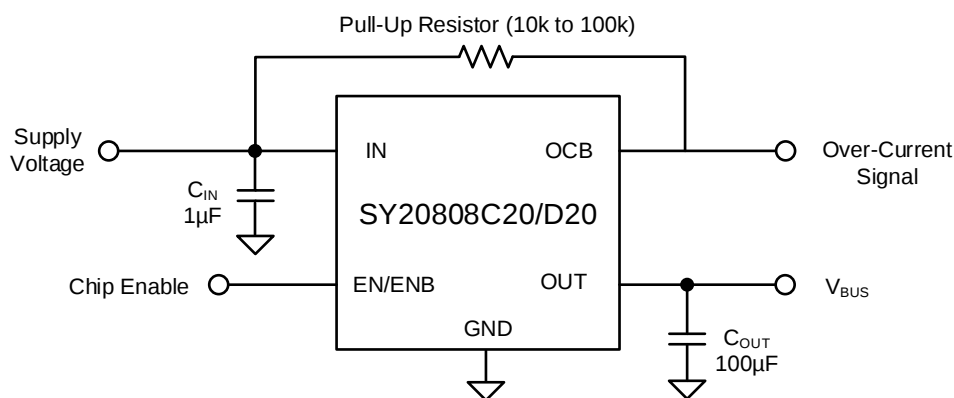

Note: If 1 μ F input cap will lead to large V_{in} voltage spike, it is strongly recommended to add additional 10 μ F ceramic cap.

Figure 1. Schematic Diagram

Ordering Information


Ordering Number	Package Type	Top Mark	Note
SY20808C20AAC	SOT23-5	RTxyz	2A/Active High
SY20808D20AAC	SOT23-5	RExyz	2A/Active Low

RoHS Compliant and Halogen Free

Device code: RT, RE

x=year code, y=week code, z= lot number code


Pinout (Top View)

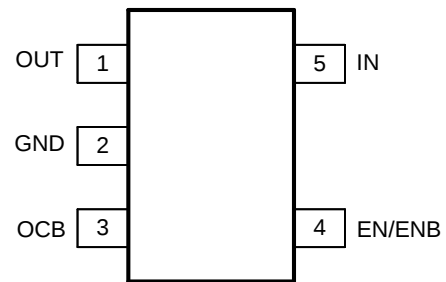

(SOT23-5)

Pin Name	Pin Number	Pin Description
IN	5	Input pin
GND	2	Ground pin
OUT	1	Output pin
EN-SY20808C20 ENB-SY20808D20	4	ON/OFF control. Do not leave it floating. EN: Active high; ENB: Active low.
OCB	3	Open Drain Fault Flag. Active low

Block Diagram

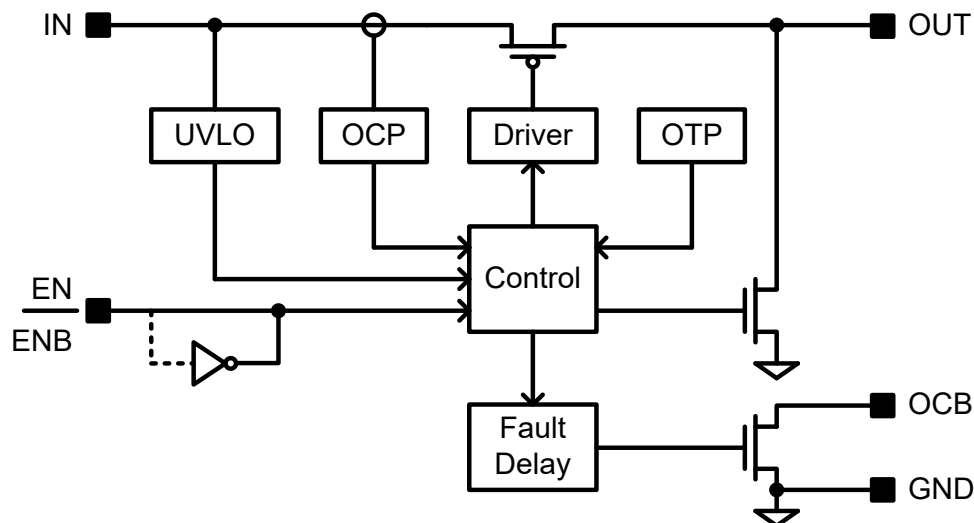



Absolute Maximum Ratings

Parameter (Note 1)	Min	Max	Unit
OUT, OCB, EN/ENB, IN	-0.3	6	V
Lead Temperature (Soldering, 10s)		260	
Junction Temperature, Operating	-40	150	°C
Storage Temperature	-65	150	

Thermal Information

Parameter (Note 2)	Typ	Unit
θ_{JA} Junction-to-Ambient Thermal Resistance	100	°C/W
θ_{JC} Junction-to-Case Thermal Resistance	30	
P_D Power Dissipation $T_A = 25^\circ\text{C}$	1	W

ESD Susceptibility

Parameter	Min	Max	Unit
HBM (Human Body Mode)		2	kV
MM (Machine Mode)		200	V

Recommended Operating Conditions

Parameter (Note 3)	Min	Max	Unit
IN	2.5	5.5	V
OUT, OCB, EN/ENB	0	5.5	
Junction Temperature, Operating	-40	125	°C
Ambient Temperature	-40	85	



Electrical Characteristics

($V_{IN} = 5V$, $C_L = 1\mu F$, per channel, $T_A = 25^\circ C$ unless otherwise specified.)







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		2.5		5.5	V
Shutdown Input Current	I_{SHDN}	Open load, switch off		0.1	1	μA
		Output grounded, switch off		0.1	1	μA
Quiescent Supply Current	I_Q	Open load, switch on		35		μA
FET $R_{DS(ON)}$	$R_{DS(ON)}$	SOT23-5, $V_{IN}=5V$ $I_{OUT}=0.5A$	60	65	75	m Ω
Current Limit	I_{LIM}	SY20808C20/D20	2.2	3.0	3.8	A
Fold back Current	I_{FBC}	$V_{IN}>3.5V$, $V_{OUT}<1V$		2.1	2.8	A
EN/ $\overline{EN}$ Threshold	Logic-Low Voltage	V_{IL}			0.5	V
	Logic-High Voltage	V_{IH}	$V_{IN}=5V$, $T_A=25^\circ C$	1.5		V
		V_{IH}	$V_{IN}=3.3V$, $T_A=25^\circ C$	1.35		V
IN UVLO Threshold	$V_{IN,UVLO}$				2.45	V
IN UVLO Hysteresis	$V_{IN,HYS}$			0.1		V
Rise Time	t_{RISE}	$V_{IN}=3.3V$, $R_L=3\Omega$, $C_L=1\mu F$	1.4	1.9	2.5	ms
		$V_{IN}=5.0V$, $R_L=5\Omega$, $C_L=1\mu F$	2.2	3.0	3.8	ms
OCB Low Resistance	R_{OCB}			10		Ω
OCB Delay Time	t_{OCB_Delay}			15		ms
OUT Shutdown Discharge Resistance	R_{DIS}		80	90	100	Ω
Thermal Shutdown Temperature	T_{SD}			150		$^\circ C$
Thermal Shutdown Hysteresis	T_{HYS}			20		$^\circ C$
Short Circuit Response Time	t_{SC}			2		μs

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^\circ C$ on the Silergy Evaluation Board.

Note 3: The device is not guaranteed to function outside its operating conditions


Typical Performance Characteristics

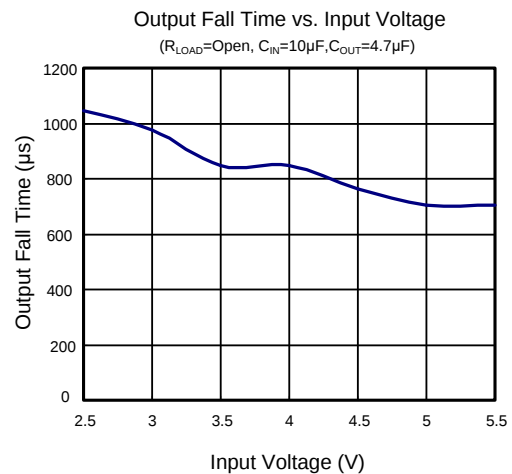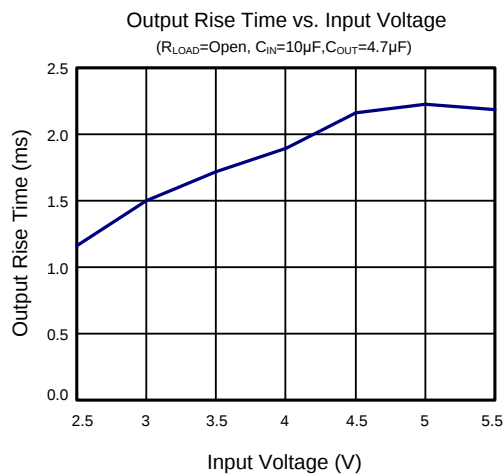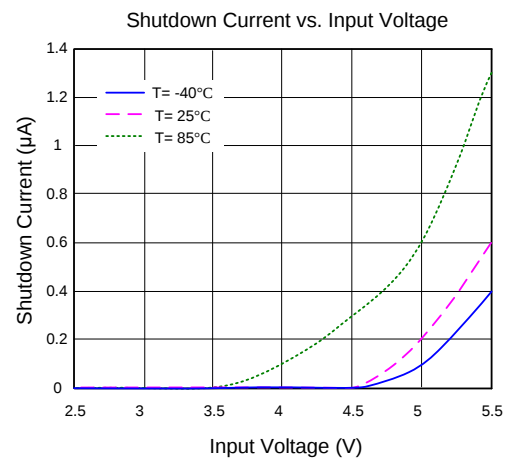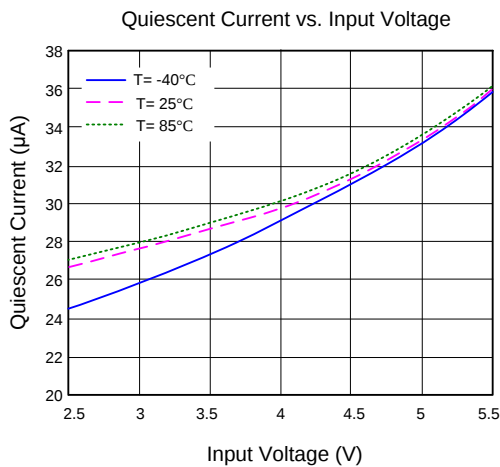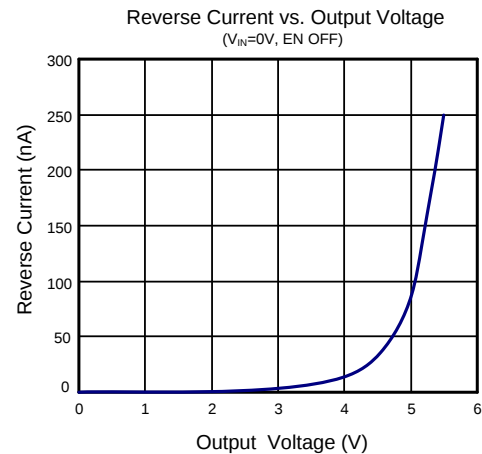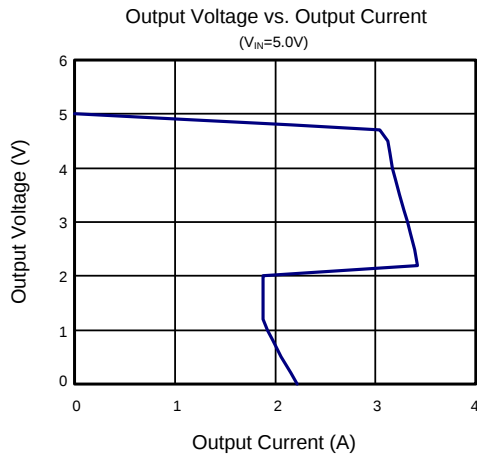


OCB Deglitch Time vs. Input Voltage

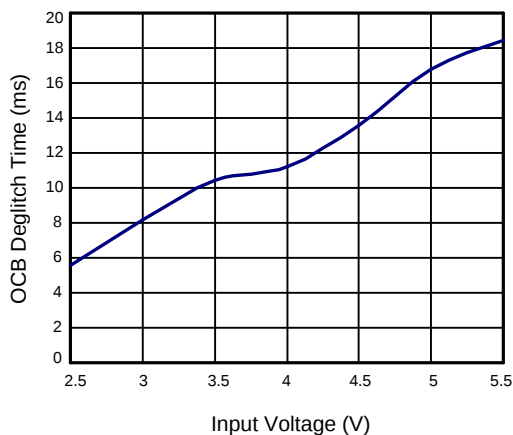


$R_{DS(ON)}$ vs. Output Current
($C_{IN}=10\mu F, C_{OUT}=10\mu F, V_{IN}=5V$)

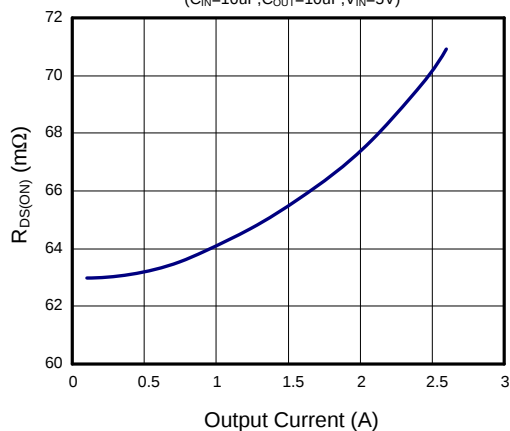


Current Limit vs. Input Voltage

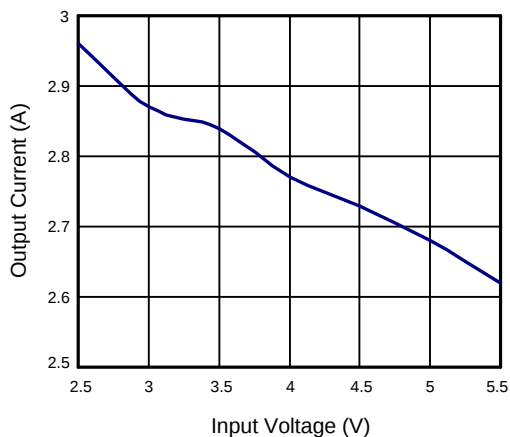


Current Limit vs. Output Voltage
($V_{IN}=5V, C_{IN}=10\mu F, C_{OUT}=10\mu F$)






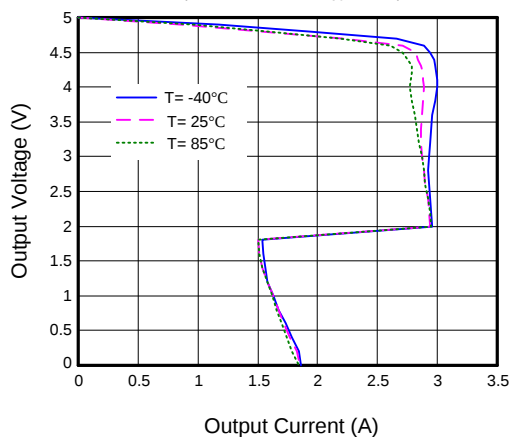


Enable Threshold vs. Temperature
($V_{IN}=5V$)

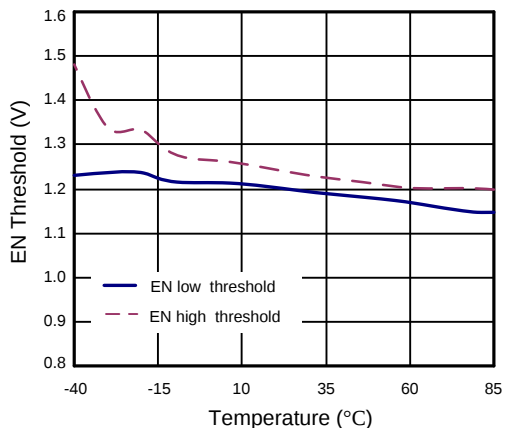


UVLO Threshold vs. Temperature

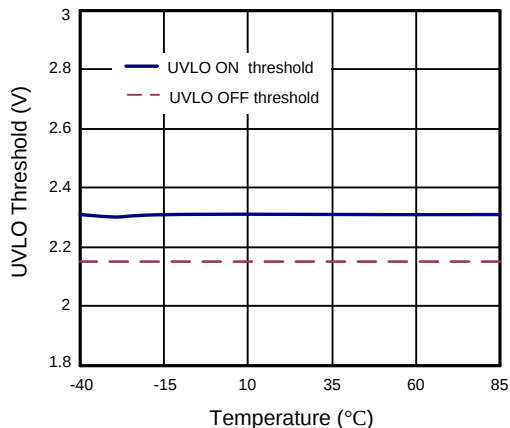

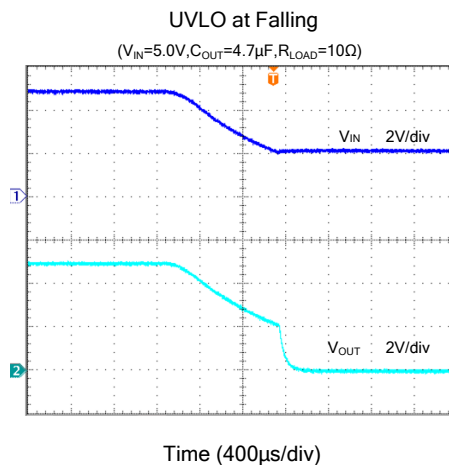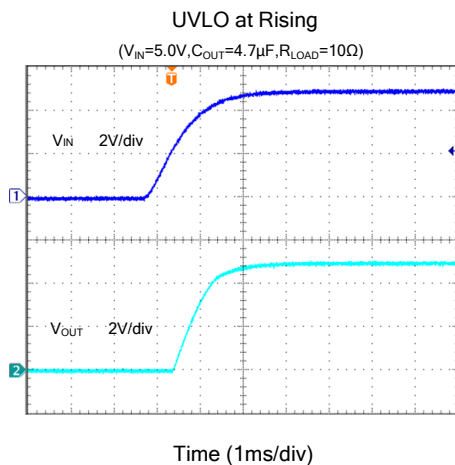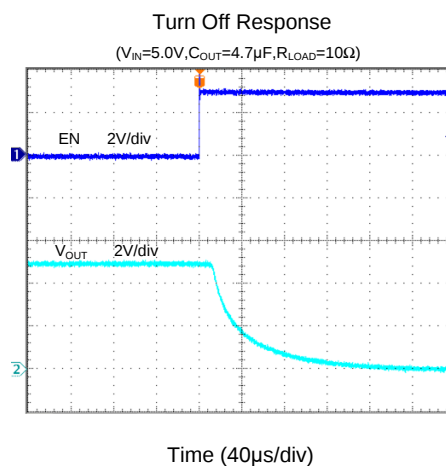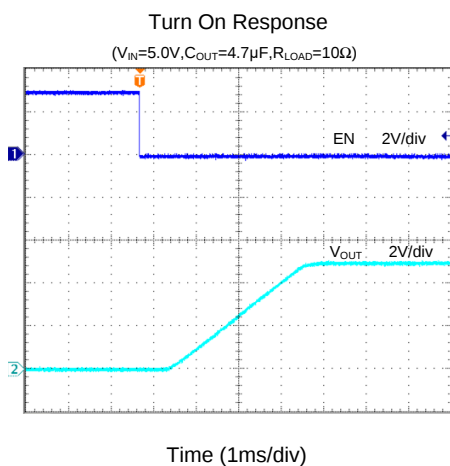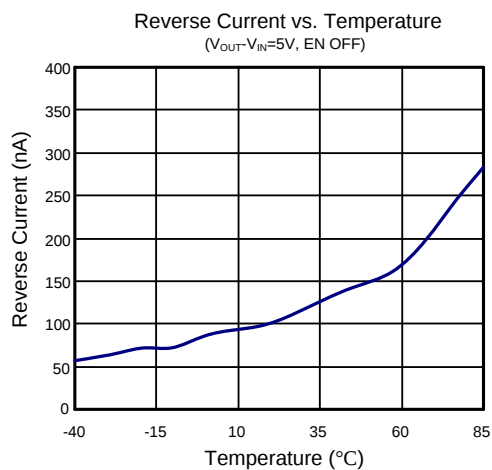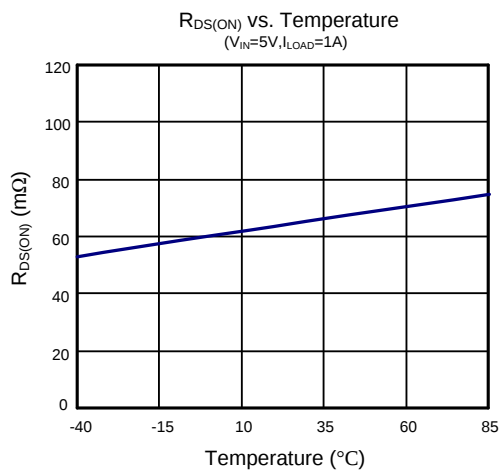


OCB Response during Short Circuit

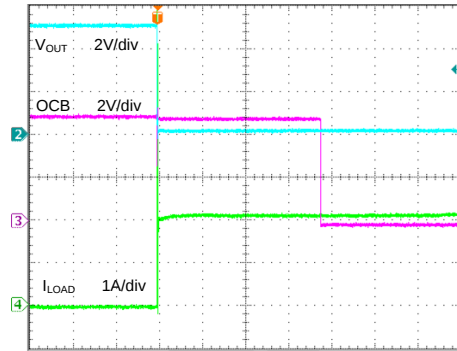

Time (4ms/div)


OCB Response during Over Load

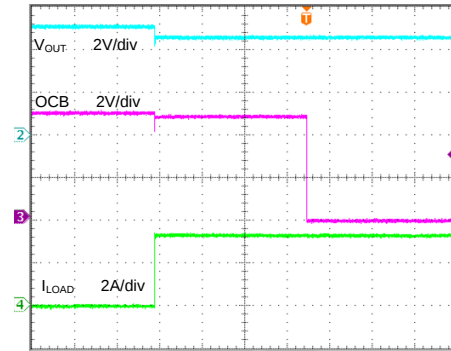

Time (4ms/div)

Turn off Delay Time and Fall Time


($C_{IN}=10\mu F, C_{OUT}=10\mu F, R_L=10\Omega$)

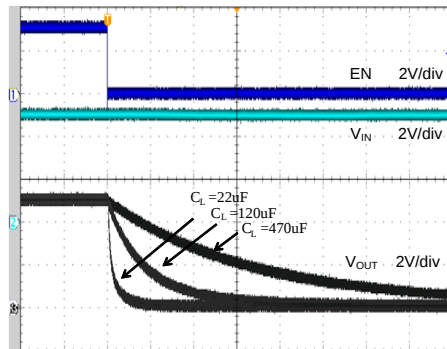

Time (800μs/div)

Inrush Current with Different Load Capacitance


($C_{IN}=10\mu F, C_{OUT}=10\mu F, C_L=470\mu F, R_L=10\Omega$)

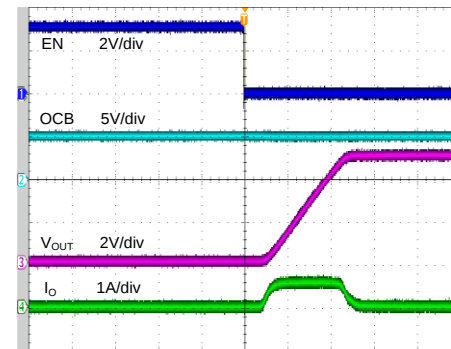

Time (2ms/div)

Thermal Shutdown Response


($C_{IN}=10\mu F, C_{OUT}=10\mu F, R_L=1.3\Omega, V_{IN}=5V$)

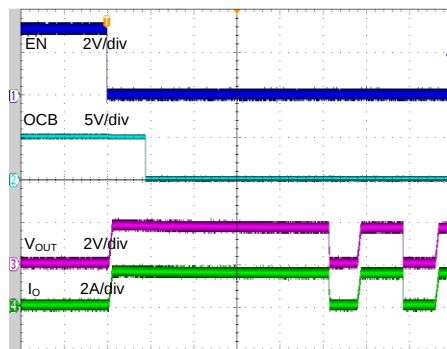

Time (20ms/div)

Resistance Load Inrush Response


($C_{IN}=10\mu F, C_{OUT}=10\mu F, R_L=1.3\Omega, V_{IN}=5V$)

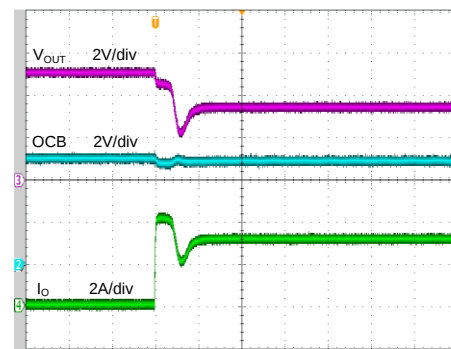

Time (40μs/div)

Capacitance Load Inrush Response


($C_{IN}=10\mu F$, $C_{OUT}=10\mu F$, $R_L=10\Omega$, $V_{IN}=5V$)

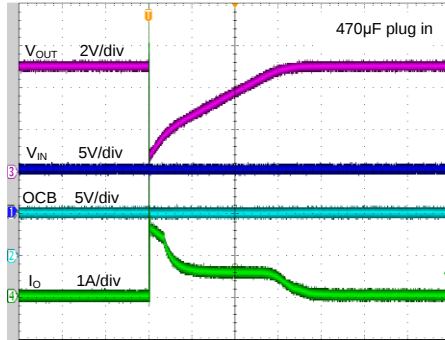

Time (800 μs /div)

Reverse-Voltage Protection Response


($C_{IN}=10\mu F$, $C_{OUT}=10\mu F$, $V_{IN}=5.5V \rightarrow 5.0V$, $V_{OUT}=5.5V$)

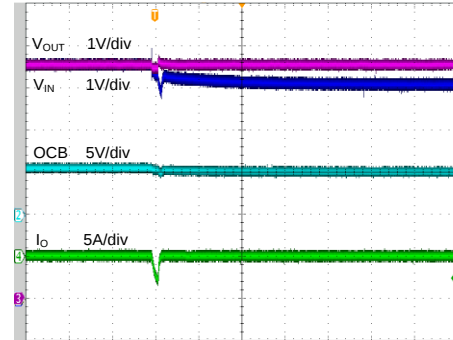

Time (800 μs /div)

Short Circuit Response


($V_{IN}=5V$, $C_{IN}=10\mu F$, $C_{OUT}=4.7\mu F$)

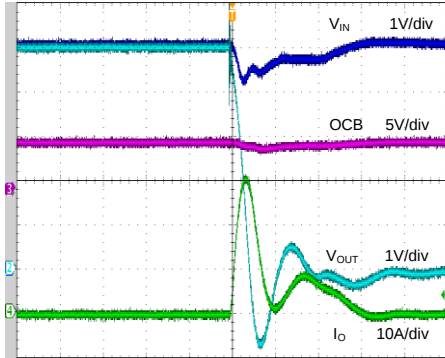

Time (4 μs /div)

Reverse-Voltage Protection Recovery

($C_{IN}=10\mu F$, $C_{OUT}=10\mu F$, $R_L=10\Omega$, $V_{IN}=5.0V$, 5.5V V_{OUT} Removed)

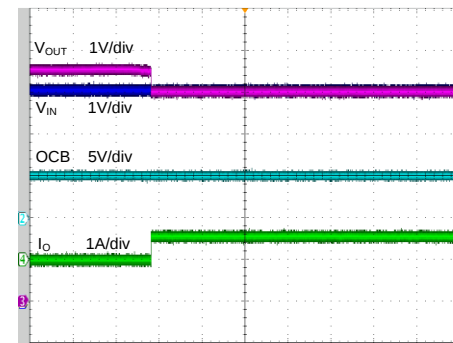

Time (200ms/div)



Application Information

The SY20808C20/D20 is a current limited P-channel MOSFET power switch designed for high-side load-switching applications. There is no parasitic body diode between the drain and source of the MOSFET, so the SY20808C20/D20 prevents current flow from out to input when out is externally forced to a higher voltage than VIN when the chip is disabled.

Overcurrent Protection:

When the overcurrent condition is sensed, the gate of the pass switch is controlled to achieve a constant output current. Under output short-circuit conditions, the current limit will fold back by 50% to the I_{FBC} .

Thermal Shutdown Protection:

If the overcurrent condition persists for a long enough time, the device's junction temperature may exceed the thermal protection threshold (typically 150 °C). In this case, the overtemperature protection will shut down the device. Once the temperature drops below 130°C, the part will restart.

Fault Flag (OCB):

The OCB output is asserted (active low) when an over-temperature shutdown or over-current condition persists for 15ms. The output remains asserted until the overcurrent or over temperature condition is removed. Connecting a heavy capacitive load to an enabled device can cause a momentary overcurrent condition; however, no false reporting on OCB occurs due to the 15ms deglitch circuit.

The open-drain output requires a pull-up resistor for proper operation. The pin can be tied to GND or left floating if not used.

Supply Filter Capacitor:

Connecting at least a 1uF ceramic capacitor from IN to GND is strongly recommended to prevent the input voltage from dropping during hot-plug events. Higher output capacitor values can further reduce the voltage drop. Without an input capacitor, an output short can cause ringing on the input, which could destroy the internal circuitry when the input transient exceeds 6V, the absolute maximum supply voltage, even for a short duration.

Output Filter Capacitor:

A low-ESR 10μF capacitor is sufficient for most applications where the transient voltage drop between IN and OUT is not important.

It is recommended to place a low-ESR 100μF aluminum electrolytic or tantalum capacitor between VOUT and GND to ensure compliance with a 330mV maximum transient voltage drop. For optimal performance, standard bypass methods should be employed to minimize inductance and resistance between the bypass capacitor and the downstream connector. This not only reduces EMI but also enhances transient performance.



SILERGY

Schematic

SY20808C20/D20

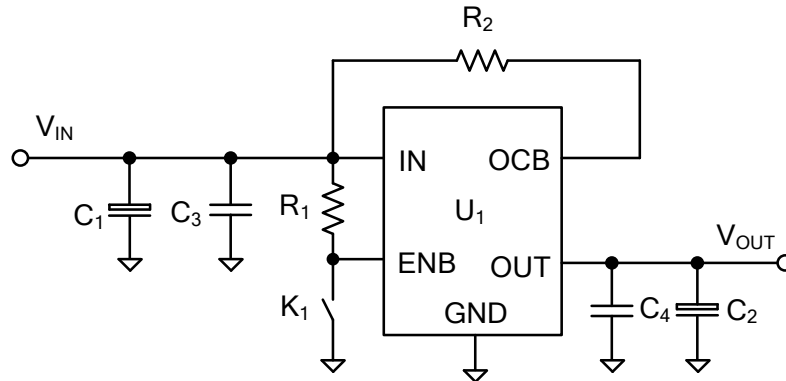


Figure 1. Schematic Diagram

BOM List

Reference Designator	Description	Part Number	Manufacturer
U1	Low Loss Power Distribution Switch	SY20808D20AAC	
C3, C4	10uF/10V,0805,X5R	C2012X5R1A106M	TDK
R1	510kΩ, 0603		
R2	100kΩ		

PCB Layout Guide

For best performance of the SY20808C20/D20, the following guidelines must be followed:

1. Keep all V_{BUS} traces as short and wide as possible, and use at least 2 ounce copper for all V_{BUS} traces
2. Place a ground plane under all the circuitry to lower resistance and inductance to improve DC and transient performance.
3. Place the output capacitor as close to the connectors as possible to lower the impedance and inductance between the port and the capacitor to improve the transient performance.
4. The input and output capacitors should be placed close to the device and connected to the ground plane to reduce noise coupling.
5. Place the ceramic bypass capacitors as close as possible to the VIN and VOUT pins of the SY20808C20/D20.



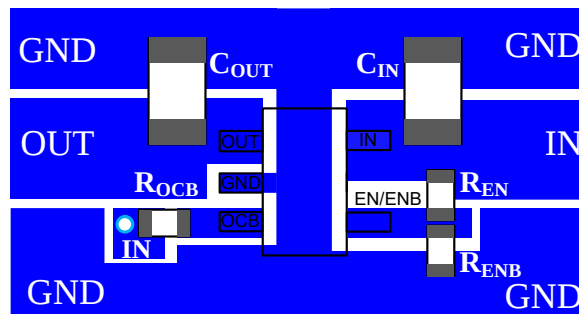


Figure 2. PCB Layout Suggestion


SOT23-5 Package Outline & PCB Layout Design

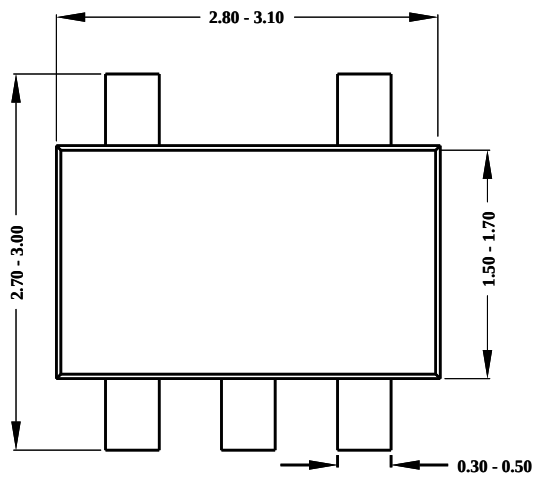


Top View

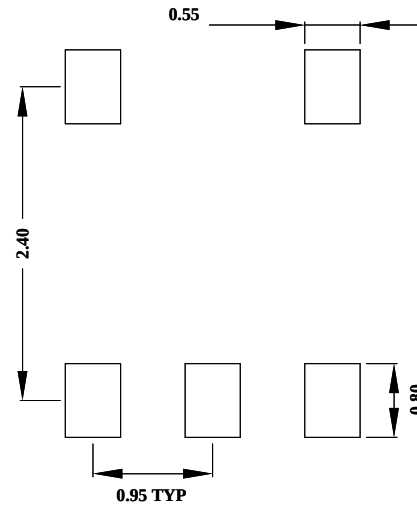

Recommended Pad Layout

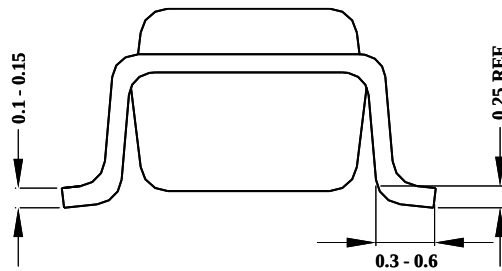

Side View

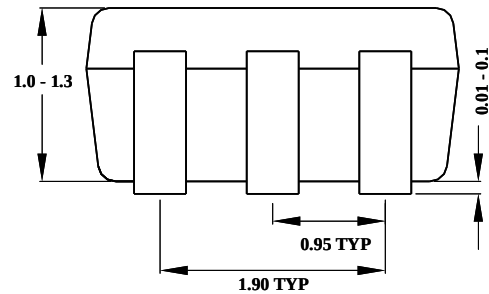


Front View


Note: All dimensions are in millimeters and exclude mold flash and metal burr.

Taping & Reel Specification

SOT23-5 Taping Orientation

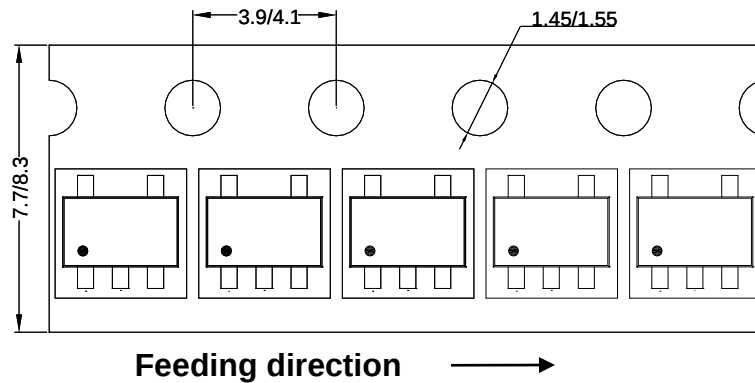

Carrier Tape & Reel Specification for Packages

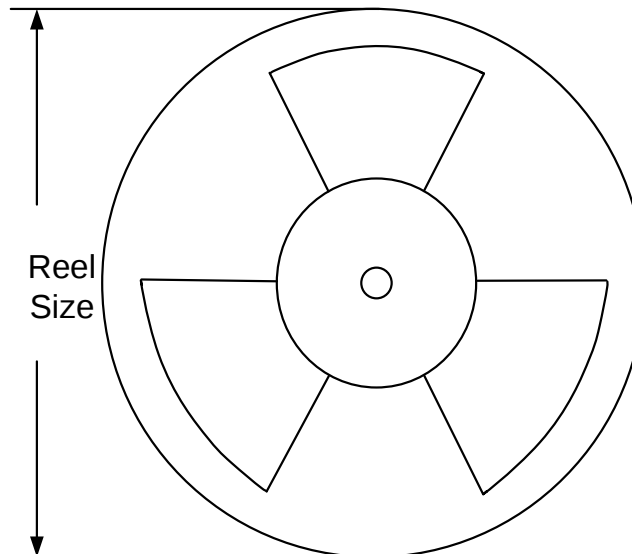

Package types	Tape width (mm)	Pocket pitch (mm)	Reel size (Inch)	Reel width (mm)	Trailer length (mm)	Leader length (mm)	Qty per reel
SOT23-5	8	4	7"	8.4	280	160	3000

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2020 Silergy Corp.

All Rights Reserved.