

General Description

SY20771 is a linear charger, which includes pre-charge/constant current/constant voltage mode. During constant current mode, its output current could be adjusted by external PWM signal. Its max output current capacity is up to 500mA. It is an ideal linear charger solution for single cell Li-Ion application.

Ordering Information

SY20771 □ (□ □) □
 □ Temperature Code
 □ Package Code
 □ Optional Spec Code

Ordering Number	Package Type	Note
SY20771ADC	TSOT23-6	----

Features

- Input Voltage Range: 3.8V to 5.5V
- Up to 500mA Constant Current, the Current Could be Adjusted by External PWM Signal
- PWM Signal Frequency Range: 20kHz~200kHz
- Charge Status Report
- Thermal Regulation Control
- Thermal Shutdown Protection
- Pb-free Package: TSOT23-6

Applications

- Battery Powered Applications
- Consumer and Portable Products

Typical Application


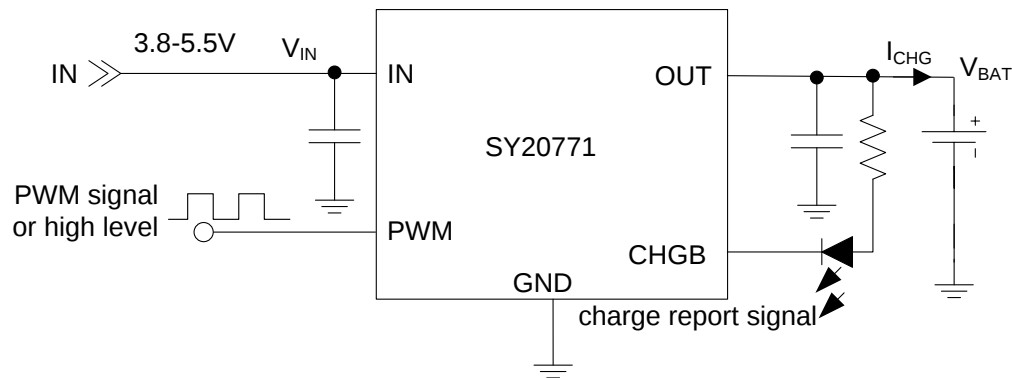


Figure1. Schematic Diagram

Pinout (Top View)



Top Mark: Zfxyz (device code: Zf, x=*year code*, y=*week code*, z= *lot number code*)

Pin Name	Pin Number	Pin Description
NC	1	Not connect.
GND	2	Ground.
OUT	3	Battery charge current output.
PWM	4	IC enable and output current adjust pin. Connect external PWM signal to adjust output current. This pin has an internal 300k Ω pull down to GND.
IN	5	Power supply input pin. Decouple this pin to GND pin with 1 μ F or greater ceramic capacitor. It receives the input from 3.8V to 5.5V.
CHGB	6	Charge status report pin, which is open drain output. Indicate low when battery is charging, indicate high when battery charging finished.

Absolute Maximum Ratings (Note 1)

IN ----- 6.5V
 OUT, PWM, CHGB ----- 6V
 Power Dissipation, P_D @ $T_A=25^{\circ}\text{C}$ ----- 0.98W
 Package Thermal Resistance (Note 2)
 θ_{JA} ----- 128 $^{\circ}\text{C/W}$
 θ_{JC} ----- 59 $^{\circ}\text{C/W}$
 Junction Temperature Range ----- -40 $^{\circ}\text{C}$ to 150 $^{\circ}\text{C}$
 Lead Temperature (Soldering, 10 sec.) ----- 260 $^{\circ}\text{C}$
 Storage Temperature Range ----- -65 $^{\circ}\text{C}$ to 150 $^{\circ}\text{C}$

Recommended Operating Conditions (Note 3)

IN ----- 3.8V to 5.5V
 Ambient Temperature Range ----- -40 $^{\circ}\text{C}$ to 85 $^{\circ}\text{C}$

Electrical Characteristics

($V_{IN} = 5V$, $T_A = 25^{\circ}C$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		3.8		5.5	V
V_{IN} UVLO Rising Threshold	V_{INUVLO}				3.7	V
V_{IN} UVLO Hysteresis	$UVLO_{HYS}$			0.2		V
OUT Current (Battery Current into OUT Terminal)	$I_{OUTDOWN}$	$V_{IN} = 5V$, PWM=high level, charging terminate		40		μA
Battery Leakage Current (Battery Current into OUT Terminal)	I_{LK}	PWM =low level		1		μA
Minimum Dropout Voltage	V_{DPMIN}	$V_{DPMIN} = V_{IN} - V_{BAT}$, $I_{CHG} = 500mA$		500		mV
Charge Current Accuracy	I_{CHGA}	PWM=high level, $V_{BAT} = 4V$	-5%	500	+5%	mA
		PWM=20kHz, PWM Duty=20%, $V_{BAT} = 4V$	-7.5%	100	+7.5%	mA
Battery Regulation Voltage (CV)	V_{REG}		-0.5%	4.2	+0.5%	V
Constant Voltage to Constant Current Transition Hysteresis (Battery Recharge)	V_{RCHYS}	V_{REG} Hysteresis		100		mV
Pre-charge to Constant Charge Transition Rising Threshold	V_{PCHG}		2.4	2.5	2.6	V
Battery Pre-charge Threshold Hysteresis	V_{PCHGH}			0.1		V
Pre-charge Current	I_{PCHG}	PWM=high level, percentage of charge setting current	12	15	18	%
Termination Threshold Current	I_{TERM}	PWM=high level, percentage of charge setting current	7	9	11	%
PWM Input Logic High	V_{IH}		1.4			V
PWM Input Logic Low	V_{IL}				0.5	V
CHGB Pull Down Voltage		$I_{sink} = 1mA$			0.54	V
Thermal Regulation Control Temperature Threshold	T_{REG}			115		$^{\circ}C$
Thermal Shutdown Temperature	T_{SD}			150		$^{\circ}C$
Thermal Shutdown Hysteresis	T_{HYS}			20		$^{\circ}C$

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^{\circ}C$ on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard.

Note 3: The device is not guaranteed to function outside its operating conditions

Typical Performance Characteristic


($V_{IN} = 5V$, $V_{BAT} = 3.7V$, $PWM = 5V$)

Startup from V_{IN}

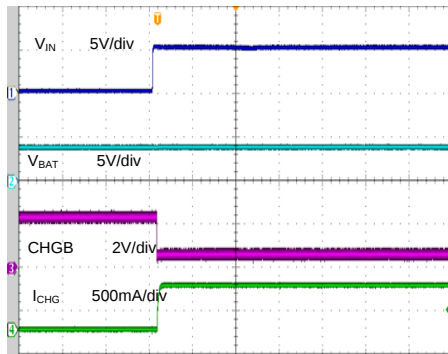


Time (2ms/div)

Shutdown from V_{IN}

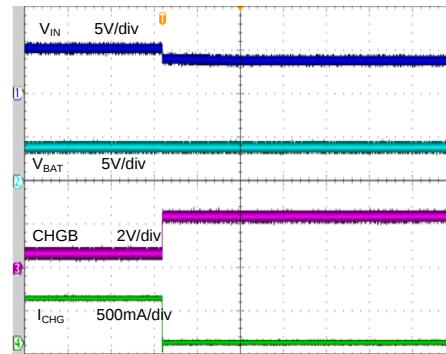


Time (2ms/div)

Startup from PWM

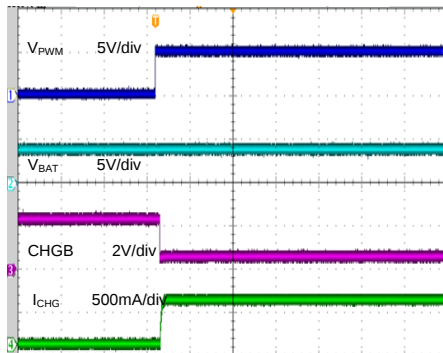


Time (2ms/div)

Shutdown from PWM

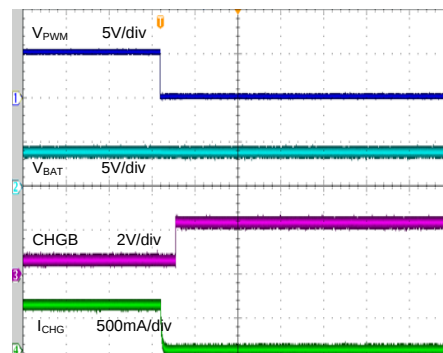


Time (2ms/div)

Adjustable Charge Current Waveform
($F_{PWM} = 20kHz$, Duty=50%)


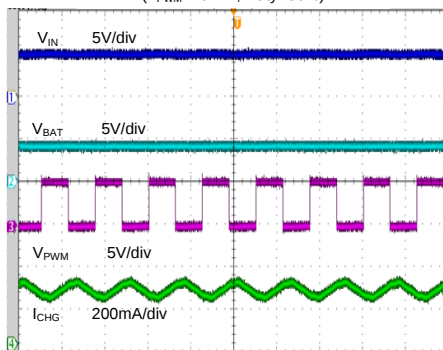


Time (40us/div)

Adjustable Charge Current Waveform
($F_{PWM} = 200kHz$, Duty=50%)

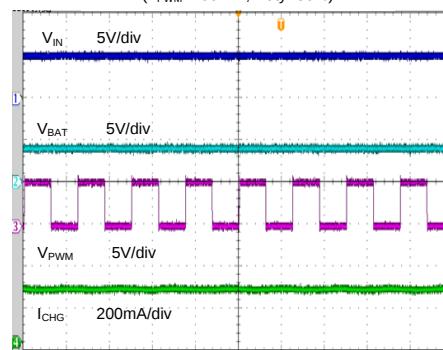

Time (4us/div)

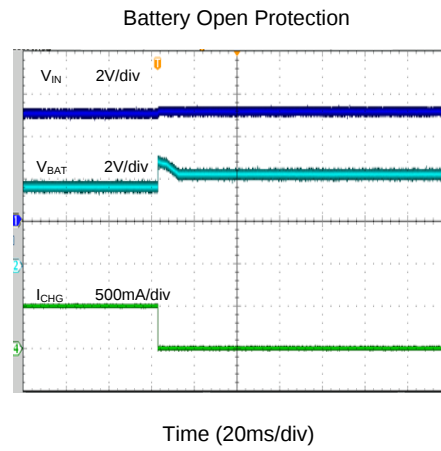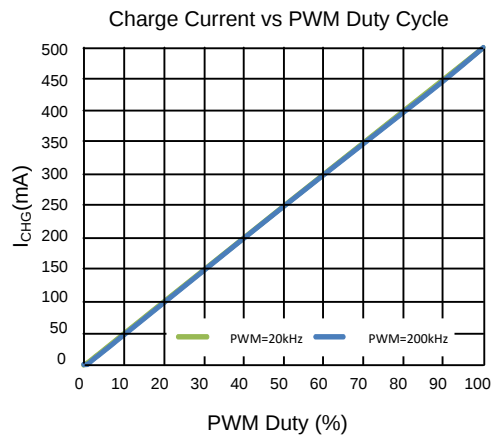

Function Description

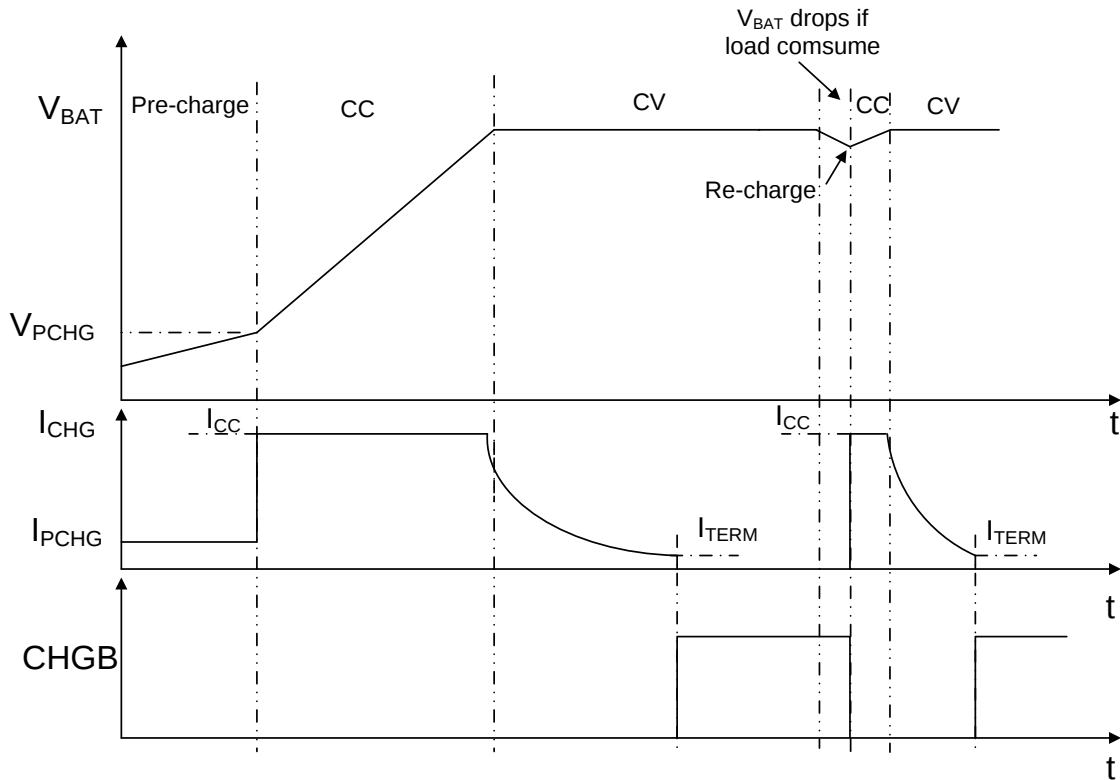


Figure2. Typical Charge Profile (if not Trigger Thermal Regulation)

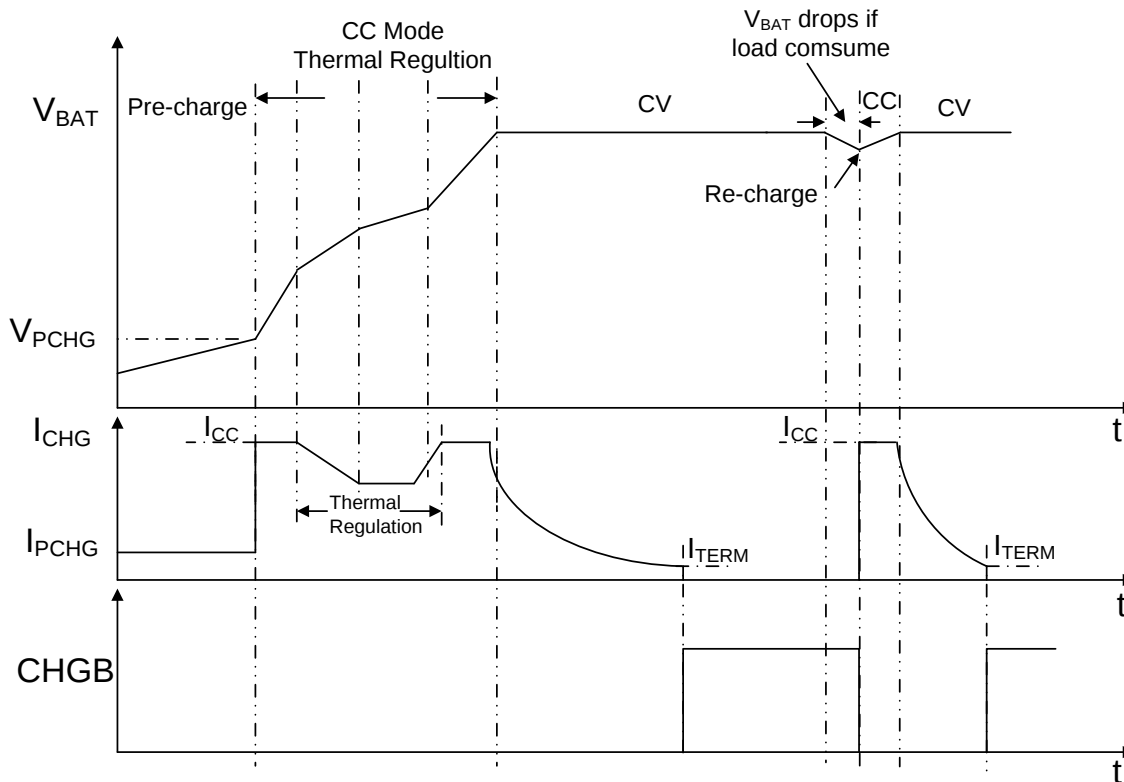


Figure3. Typical Charge Profile (if Trigger Thermal Regulation)

Battery Charge Profile

SY20771 charges a Li-Ion battery under pre-charge, constant current (CC) mode or constant voltage (CV) mode.

Battery Pre-charge Current (Pre-charge Mode)

When the battery voltage is less than V_{PCHG} (Pre-charge to Constant Charge Transition Rising Threshold), SY20771 applies a pre-charge mode to the battery. This feature revives deeply discharged cells and protects battery life. The internally determined pre-charge rate is 15% (typical) of the constant charge current.

Battery Charge Current (CC Mode)

CC Mode charge current is determined by PWM signal duty cycle. The CC current can be calculated by the following equation:

$$I_{CC} = 500 \times \text{PWM signal duty cycle (mA)}.$$

It is recommended to apply the PWM signal frequency in the 20kHz to 200kHz range. The PWM signal frequency is higher; the output current ripple is less.

Battery Voltage Regulation (CV Mode)

The battery voltage regulation feedback is through the OUT pin. SY20771 monitors the battery voltage between the OUT and GND pin. When battery voltage is close to battery regulation voltage threshold, the voltage regulation phase begins and the

charging current begins to taper down. When battery voltage is over battery regulation voltage threshold and charge mode stops, SY20771 still monitors the battery voltage. Charge current is resumed when the battery voltage falls under battery regulation voltage threshold by hysteresis

Enable and Disable the Device

The IC will be shut down if PWM is always low level or floating.

To enable the IC, a high level or PWM signal is added between the PWM pin and GND pin.

Thermal Shutdown Protection

When the IC junction temperature reaches 150°C, the IC will shut down. The IC will not start up again until the junction temperature falls below 130°C or the power input is recycled.


Thermal Regulation Control

Automatic thermal regulation control is active when SY20771's junction temperature is higher than 115°C. The charge current will be automatically decreased according to the thermal regulation control. It can prevent the IC from triggering thermal shutdown.


Input and Output Reverse Protection

When the IC has been enabled, if $V_{IN} - V_{BAT} \leq 100\text{mV}$, internal switcher will be shutdown, then if $V_{IN} - V_{BAT} > 300\text{mV}$, internal switcher will be recovery.

TSOT23-6 Package Outline & PCB Layout

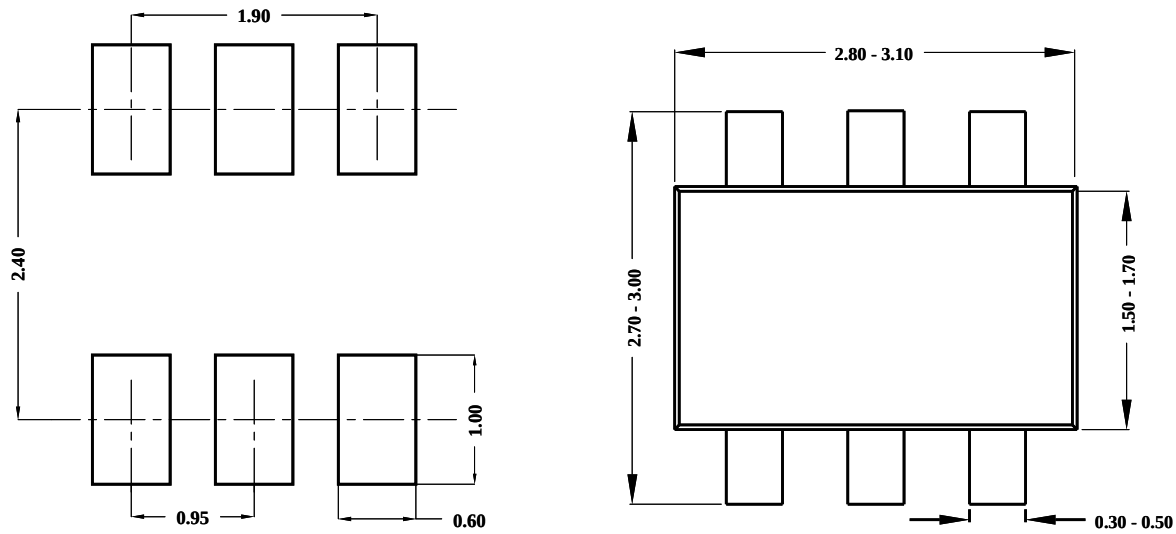

Recommended Pad Layout

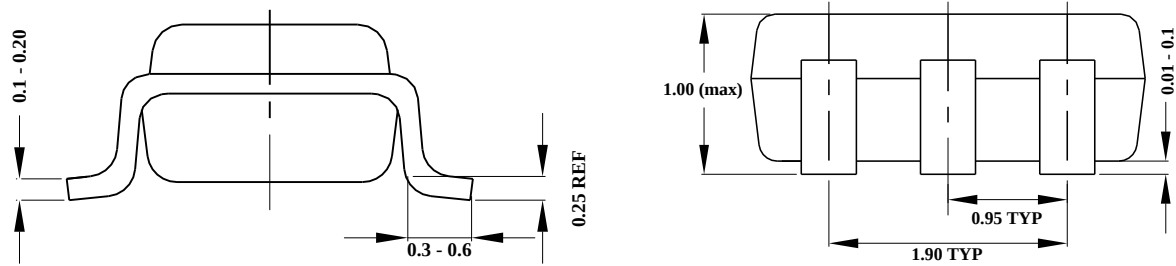


Notes: All dimensions are in millimeters.

All dimensions don't include mold flash & metal burr.


Taping & Reel Specification

1. Taping orientation

TSOT23-6

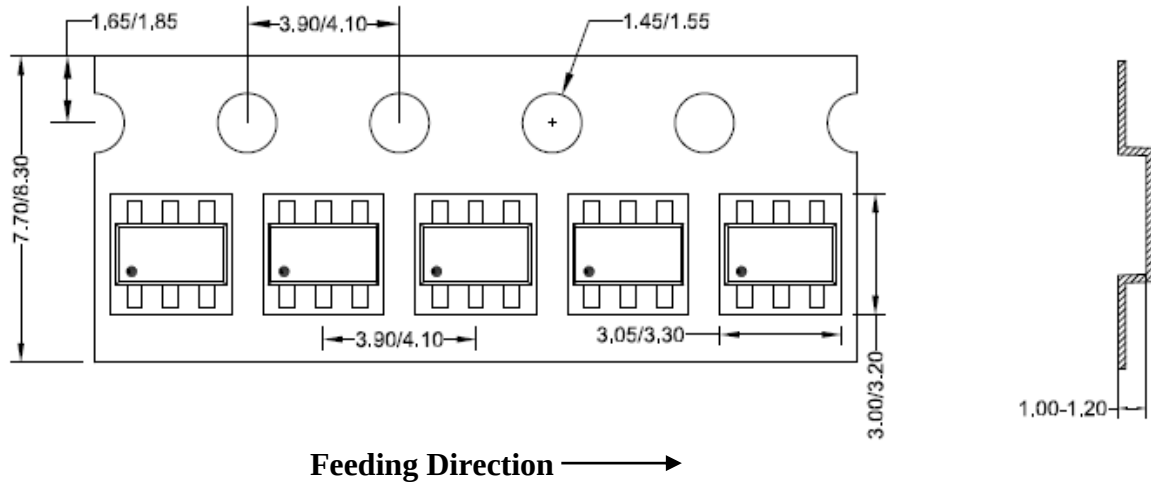

2. Carrier Tape & Reel specification for packages

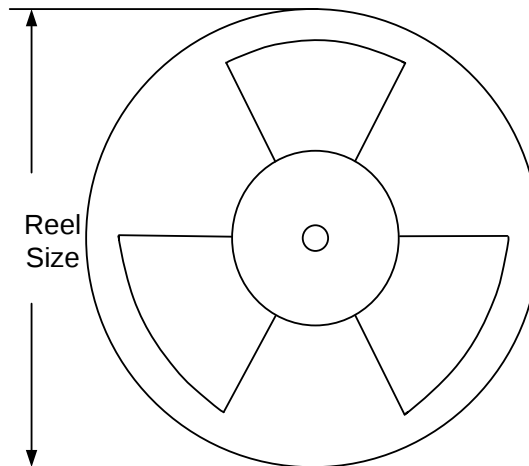

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel (pcs)
TSOT23-6	8	4	7"	400	160	3000

3. Others: NA

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2018 Silergy Corp.

All Rights Reserved.