

General Description

The SY20714 is a fixed 3.3V output precise LDO capable of delivering 50mA load current. The device works under a wide input voltage range of 3.6V to 30V. The ultra low drop out voltage, wide input voltage range and low ground current make it suitable for USB and portable electronics applications with different inputs. Other features include the operation stability with low ESR ceramic capacitors due to the internal compensation, logic enable control, thermal shutdown, current limit, reverse leakage current protection.

The SY20714 is available in SOT23-5 package.

Ordering Information

SY20714 □ (□ □) □
 └─ Temperature Code
 └─ Package Code
 └─ Optional Spec Code

Ordering Number	Package type	Output Voltage
SY20714AAC	SOT23-5 RoHS-Compliant and Halogen-Free	3.3V

Features

- Wide Input Voltage Range: 3.6V to 30V
- 3.3V Fixed Output Voltage
- Low Dropout Voltage(100mV @ 50mA)
- Low Ground Current
- Ultra Low Shutdown Current
- $\pm 2\%$ Output Voltage Accuracy
- Stable with Small Ceramic Capacitors
- Excellent Load and Line Regulation
- 50mA Output Current Capability
- Output Current Limitation
- Reverse Leakage Current Protection
- Reverse Input Voltage Protection
- TTL Logic Enable Input
- Thermal Shutdown
- Compact SOT23-5 Package

Applications

- Battery powered applications
- Consumer and portable products
- Notebook
- Smart phones
- SMPS post-regulator/ DC-DC modules

Typical Application

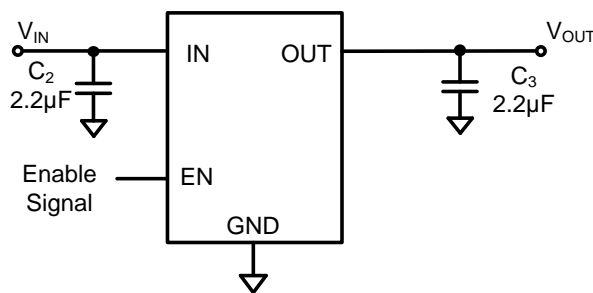


Figure 1. Schematic Diagram


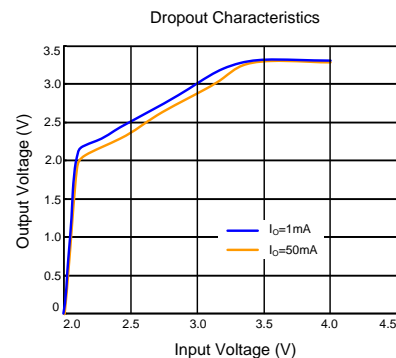


Figure 2. Dropout Characteristics


Pinout (top view)

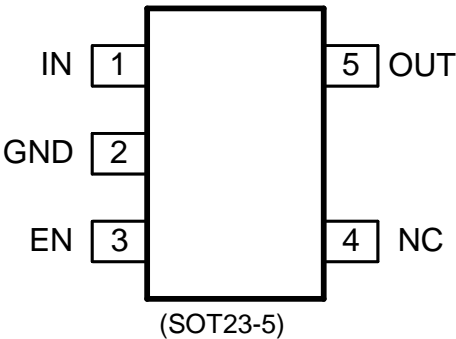

Top mark: **ZCxyz** (Device code: ZC, *x=year code, y=week code, z=lot number code*)

Pin Name	SOT23-5	Pin Description
IN	1	Supply input pin. Decouple this pin to GND with a 1uF MLCC
GND	2	Ground pin.
OUT	5	LDO output pin.
EN	3	Enable pin. Pull it low to shutdown or leave it floating to enable.
NC	4	No connection

Function Block

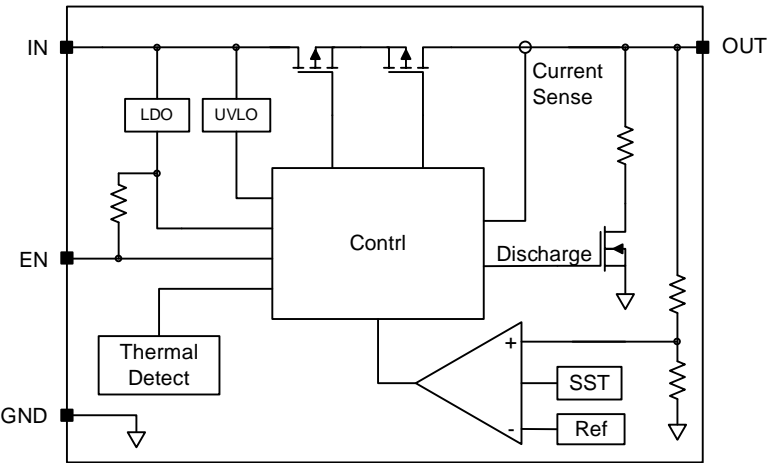

Absolute Maximum Ratings (Note 1)

Supply Input Voltage	-20V to 36V
Output Voltage	0.3V+V _{IN}
EN Voltage	-0.3V to 0.3V+V _{IN}
Power Dissipation, P _D @ T _A = 25°C SOT23-5	0.6W
Package Thermal Resistance (Note 2)	
θ _{JA}	170°C/W
θ _{JC}	130°C/W
Junction Temperature Range	150°C
Lead Temperature (Soldering, 10 sec.)	260°C
Storage Temperature Range	-65°C to 150°C

Recommended Operating Conditions (Note 3)

Supply Input Voltage	3.6V to 30V
Output Voltage	0.3V+V _{IN}
EN Voltage	0V to 0.3V+V _{IN}
Junction Temperature (T _J)	-40°C to +125°C

Electrical Characteristics

(V_{IN} = 5V, T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typical	Max	Unit
Input Voltage	V _{IN}		3.6		30	V
Output Voltage	V _{OUT}	I _O =100uA	3.234	3.3	3.366	V
Line Regulation	ΔV _{LNR}	I _O =100uA		0.04		%
Load Regulation	ΔV _{LDR}	I _O =0.1mA to 50mA		0.25	1	%
Dropout Voltage	V _{IN} -V _{OUT}	I _O =10mA		20		mV
		I _O =50mA		100		mV
Shutdown Current	I _{SHDN}	V _{EN} =0V, V _{IN} =24V		1		μA
Quiescent Current	I _Q	I _O =0.1mA		18	30	μA
		I _O =50mA		110		μA
Current Limit	I _{LIM}	V _{OUT} =0.9×V _{OUT} (normal)		70		mA
Reverse Leakage Current Limit	I _{RLK}	V _{IN} = -15V, Load=500ohms		-0.1		μA
Power-supply Rejection Ratio	PSRR	f=1kHz, C _{OUT} =10μF		50		dB
Input UVLO Threshold	V _{UVLO}	V _{IN} rising			2.25	V
UVLO Hysteresis	V _{UVLO,TH}			100		mV
Shutdown discharge Resistor	R _{DIS}			500		Ω
Enable Input logic-High Voltage	V _{EN,H}		1.5			V
Enable Input logic-Low Voltage	V _{EN,L}				0.6	V
Thermal Shutdown Temperature	T _{SD}			150		°C
Thermal Shutdown hysteresis	T _{HYS}			20		°C




Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^{\circ}\text{C}$ on a low effective two layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard.


Note 3: The device is not guaranteed to function outside its operating conditions.

Typical Operating Characteristics


Input Current vs. Input Voltage
($V_{IN}=5V$, $V_{OUT}=3.3V$, $R_L=66\Omega$)

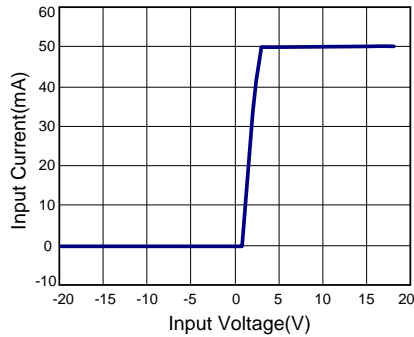


Dropout Voltage vs. Load Current

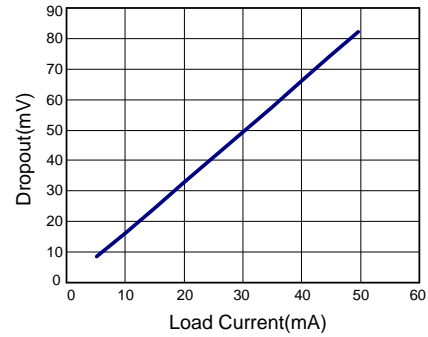

Load Regulation

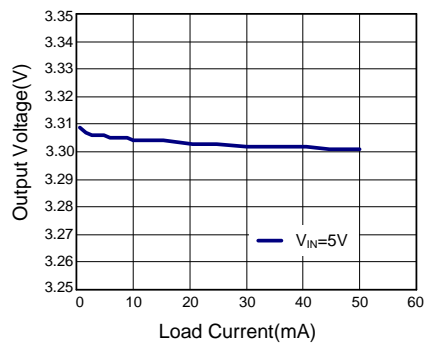


Line Regulation

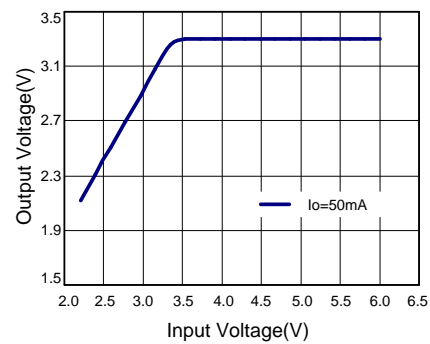


PSRR

($V_{IN}=5V$, $V_{OUT}=3.3V$, $I_{OUT}=50mA$)

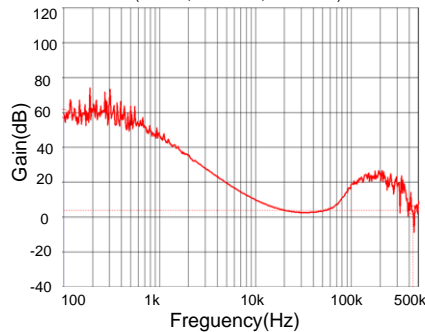


PSRR

($V_{IN}=9V$, $V_{OUT}=3.3V$, $I_{OUT}=50mA$)

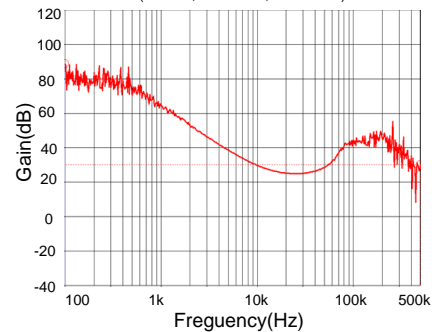


Startup From V_{IN}
($V_{IN}=5.0V$, $V_{OUT}=3.3V$, $I_O=50mA$)

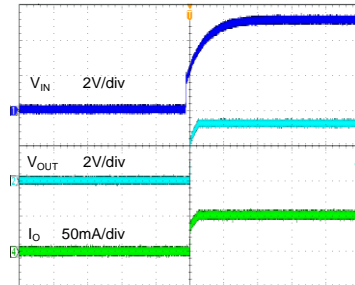


Time (4ms/div)

Shutdown From V_{IN}
($V_{IN}=5.0V$, $V_{OUT}=3.3V$, $I_O=50mA$)

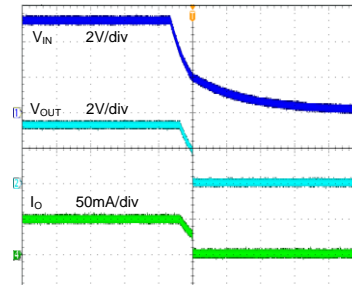


Time (20ms/div)

Startup From Enable
($V_{IN}=5.0V$, $V_{OUT}=3.3V$, $I_O=50mA$)

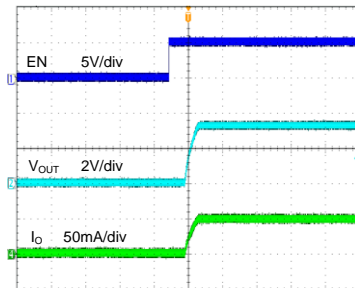


Time (400µs/div)

Shutdown From Enable
($V_{IN}=5.0V$, $V_{OUT}=3.3V$, $I_O=50mA$)

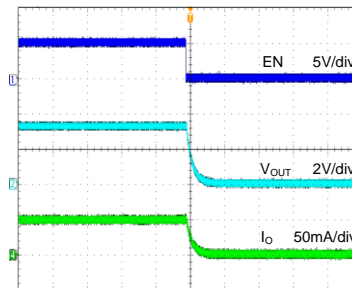


Time (800µs/div)

Hard Short Protection
($V_{IN}=5.0V$, $V_{OUT}=3.3V$, Null load to short)


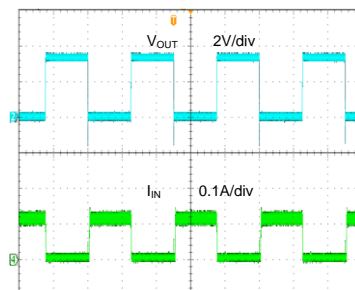


Time (4ms/div)

Hard Short Protection
($V_{IN}=5.0V$, $V_{OUT}=3.3V$, 50mA to short)

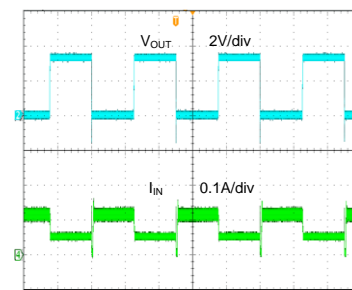

Time (4ms/div)

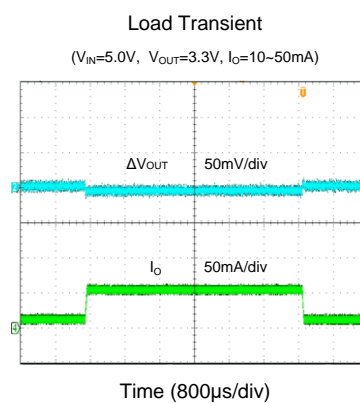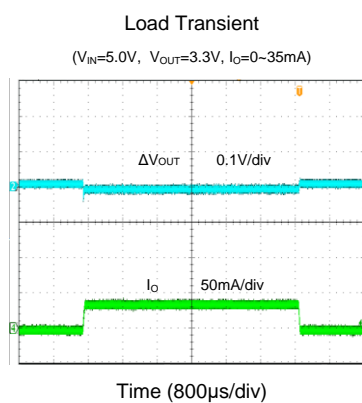

Application information

The SY20714 is a 50mA linear regulator with extra low dropout voltage. Like any other LDO regulator, SY20714 requires input and output decoupling capacitors.

Input capacitor C_{IN} :

A typical X5R or better grade ceramic capacitor with 1uF capacitance is recommended in this application. This input capacitor must be located close to the device to minimize the input noise.

Output capacitor C_{OUT} :

SY20714 is capable of working with small output capacitors. A 2.2uF output capacitance can be used in this application. Higher capacitance values help to improve transient.

Dropout Voltage:

SY20714 has a very low dropout voltage due to its extra low $R_{DS(ON)}$ of the main PMOS which determines the lowest usable supply.

$$V_{DROPOUT} = V_{IN} - V_{OUT} = R_{DS(ON)} \times I_{OUT}$$

Over Current and Short Circuit Protection:

The device includes over current and short circuit protection. The current limitation circuit regulates the output current to its limitation threshold to protect IC from damage. Under over current or short circuit condition, the power loss of the IC is relative high, which may trigger the thermal protection.

Thermal Considerations:

The SY20714 can deliver up to 50mA load current over the full operating junction temperature range. However, the maximum output current must be de-rated at higher ambient temperature to ensure the junction temperature does not exceed 125°C. With all possible conditions, the junction temperature must be within the range specified under operating conditions. Power dissipation can be calculated based on the output current and the voltage drop across regulator.


$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND}$$

The final operating junction temperature for any set of condition can be estimated by the following thermal equation:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$$

Where $T_{J(MAX)}$ is the maximum junction temperature of die (125°C) and T_A is the maximum ambient temperature.

Schematic

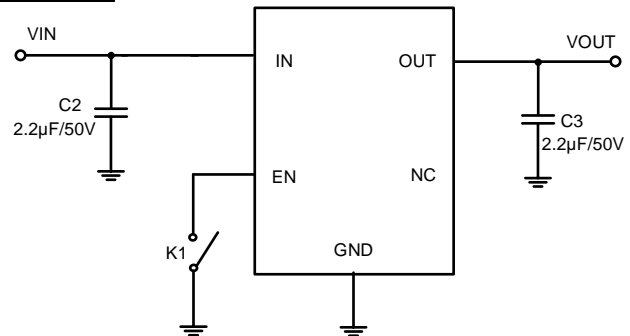

BOM List

Reference Designator	Description	Part Number	Manufacturer
U1	24V, 50mA	SY20714AAC	Silergy
C2, C3	CHIP CAP X7R 2.2uF ±10% 50V 1206	C3216X7R1H225K	TDK

Layout Design:

PCB layout is very important for reliable operation of the IC. The input and output capacitors, C_{IN} and C_{OUT} , should be put close to IC and connect to IN and OUT pins with short and thick traces. The loop formed by C_{IN} , IN and GND should be minimized. It is desired to connect the GND pin to a ground plane to maximize the power dissipation.

Following is an example of PCB layout,



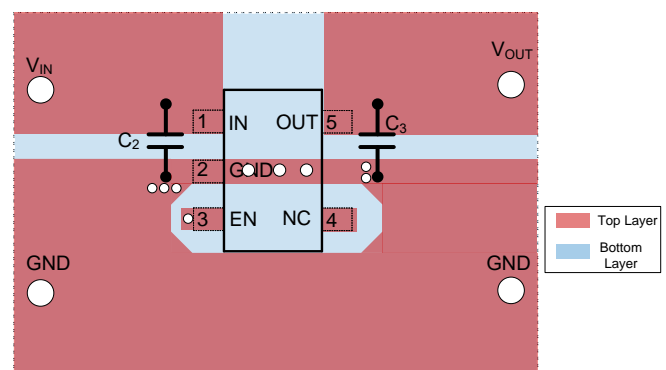


Figure 3. PCB Layout Suggestion

SOT23-5 Package outline & PCB layout design

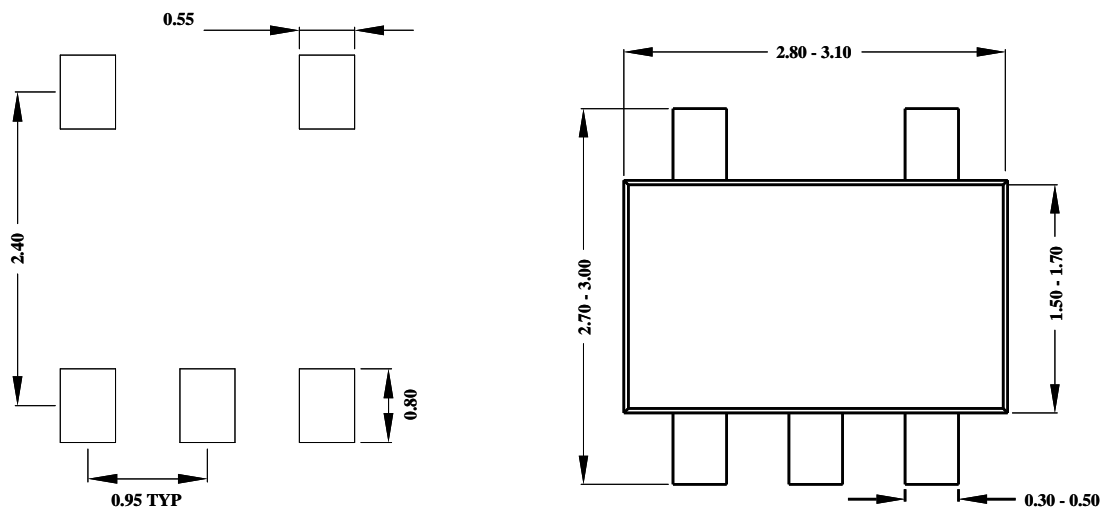

Recommended Pad Layout

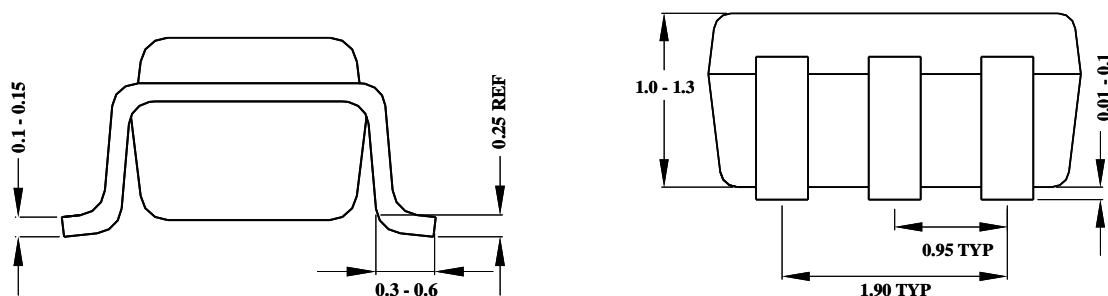


Notes: All dimensions are in millimeters.
All dimensions don't include mold flash & metal burr.


Taping & Reel Specification

1. Taping orientation

SOT23-5

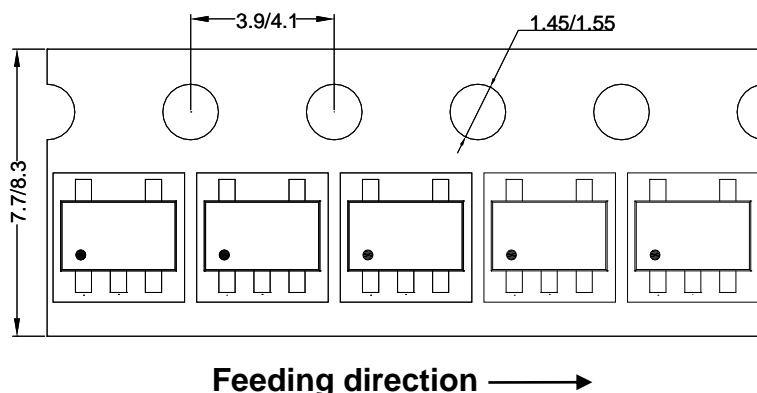

2. Carrier Tape & Reel specification for packages

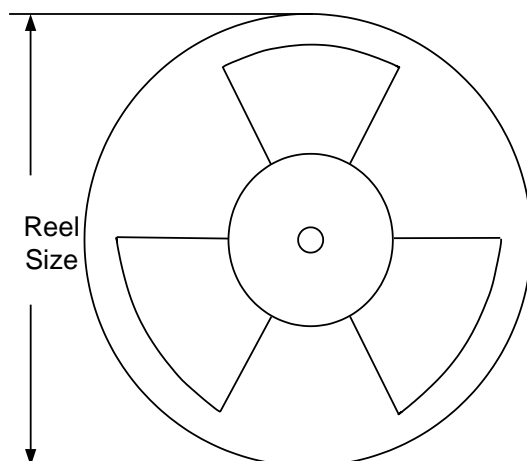

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel
SOT23-5	8	4	7"	280	160	3000

3. Others: NA



Revision History

The revision history provided is for informational purposes only and is believed to be accurate, however, not warranted. Please make sure that you have the latest revision.

Date	Revision	Change
Mar.22, 2024	Revision 1.0	Language improvements for clarity
July 22, 2014	Revision 0.9	Initial Release

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2023 Silergy Corp.

All Rights Reserved.