

1350mA High Accuracy Current Limit Low Dropout Regulator Have fast line and load transient response

General Description

The SY2A27317A is a 1350mA high current capacity linear regulator that provides high output accuracy, fast line and load transient response. The device offers protection features including over current limit, output short protection and over temperature operation.

The SY2A27317A is available in compact with CSP-2.4mm×2.4mm-36 package.

Features

- Input Voltage Range: 1.65V to 3.3V
- Output Current up to 1350mA
- PSRR at 1kHz : 55dB(Typ)
- Adjustable Output FB Voltage Accuracy : $\pm 1\%$ @ $T_A=25^\circ\text{C}$
- Drop Output Voltage : Max=0.4V
- Packages CSP 2.4mm×2.4mm -36
- RoHS Compliant and Halogen Free
- AEC Q100 Grade 2
- -40°C to $+105^\circ\text{C}$ Ambient Temperature Range

Applications

- Automotive BGA SSD

Typical Application

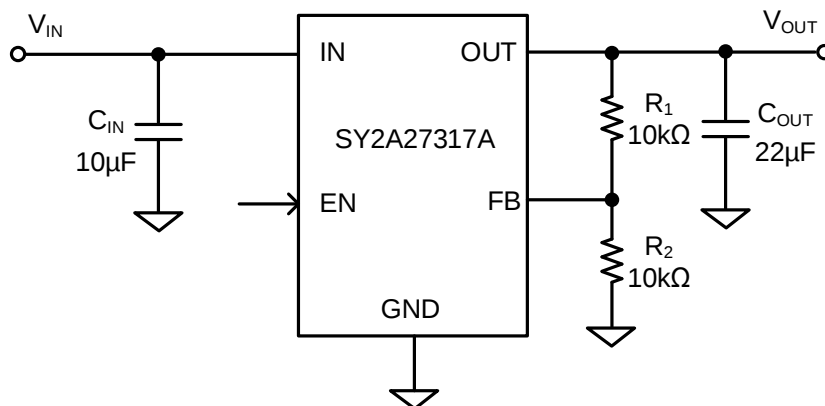


Figure1. Schematic Diagram

Ordering Information

Ordering Part Number	Package Type	Top Mark
SY2A27317AUYS	CSP 2.4×2.4 -36 RoHS Compliant and Halogen Free	5fxyz

x = year code, y = week code, z = lot number code

Pinout (top view)

	1	2	3	4	5	6
A	IN	IN	IN	OUT	OUT	OUT
B	IN	IN	IN	OUT	OUT	OUT
C	IN	IN	IN	OUT	OUT	OUT
D	IN	IN	IN	OUT	OUT	OUT
E	EN	EN	NC	FB	FB	FB
F	NC	NC	GND	GND	NC	NC

PIN Name	PIN NO.	Pin Description
IN	A1~A3, B1~B3, C1~C3, D1~D3	Power input pin. Decouple this pin to the GND pin with at least a 10μF ceramic capacitor.
OUT	A4~A6, B4~B6, C4~C6, D4~D6	Output voltage pin. Decouple this pin to the GND pin with at least a 22μF ceramic capacitor.
EN	E1~E2	Enable control pin.
NC	E3, F1~F2, F5~F6	Not connected.
FB	E4~E6	Output voltage adjust pin. Feedback the output voltage through resistor voltage divider network. $V_{OUT} = 0.6V \times (1 + \frac{R_1}{R_2})$
GND	F3, F4	Ground.

Block Diagram

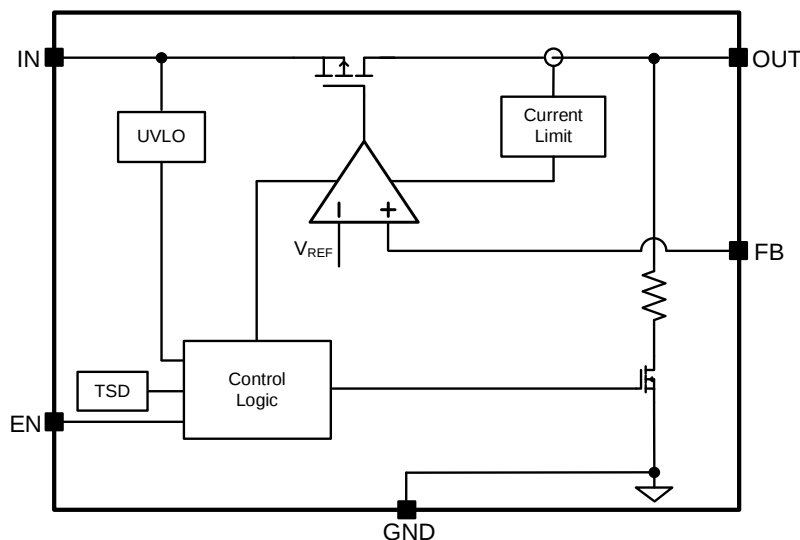


Figure2. Block Diagram

Absolute Maximum Ratings

Parameter (Note 1)	Min	Max	Unit
IN, EN, FB, OUT	-0.3	6	V
Lead Temperature (Soldering, 10s)		260	°C
Junction Temperature, Operating	-40	150	
Storage Temperature	-65	150	

Thermal Information

Parameter (Note 2)	Typ	Unit
θ_{JA} Junction-to-Ambient Thermal Resistance	40	°C/W
θ_{JC} Junction-to-Case Thermal Resistance	0.8	
P_D Power Dissipation $T_A = 25^\circ\text{C}$	2.5	W

Recommended Operating Conditions

Parameter (Note 3)	Min	Max	Unit
IN, EN, FB, OUT	1.65	3.3	V
Junction Temperature, Operating	-40	105	°C
Ambient Temperature	-40	105	

Electrical Characteristics

($V_{IN}=1.65\text{V}$ to 3.3V , $I_{OUT}=1\text{mA}$, $C_{IN}=10\mu\text{F}$, $C_{OUT}=22\mu\text{F}$, $T_A=-40^\circ\text{C}$ to $+105^\circ\text{C}$. Typical values are at $V_{IN}=1.8\text{V}$, $T_A=25^\circ\text{C}$, unless otherwise specified.)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		1.65		3.3	V
UVLO ON Threshold	V_{UVLO_ON}	EN=High	1.1		1.65	V
UVLO Hysteresis	V_{UVLO_HYS}	EN=High		0.05		V
Adjustable Output FB Voltage Accuracy	V_{FB_ACC}	$V_{IN}=1.8\text{V}$, $I_{OUT}=1\text{mA}$ to 1350mA , $T_A=25^\circ\text{C}$	594	600	606	mV
		$T_A=-40^\circ\text{C}$ to 105°C	588	600	612	mV
Line Regulation	ΔV_{LINE}	$V_{IN}=1.65\text{V}$ to 3.3V , $I_{OUT}=1\text{mA}$, $I_{OUT}=100\text{mA}$	-1		1	%/V
Load Regulation	ΔV_{LOAD}	$V_{IN}=1.8\text{V}$, $I_{OUT}=1\text{mA}$ to 1350mA		0.5		%
Dropout Voltage (Note 4)	V_{DROP}	$I_{OUT}=1350\text{mA}$			0.4	V
Quiescent Current	I_Q	EN high, No Load		300		μA
Shutdown Current	I_{SD}	EN low, No Load		0.1	5	μA
Output Current	I_{OUT}			1350		mA
Output Current Protection	I_{OCP}		1500			mA
Fold-back Short Current		V_{OUT} short to ground		750		mA
Power Supply Rejection Ratio (Note 5)	PSRR	$V_{IN}=1.8\text{V}$, $I_{OUT}=100\text{mA}$, $f=1\text{kHz}$		55		dB
EN Input Low Voltage	V_{EN_L}		0		0.4	V
EN Input High Voltage	V_{EN_H}		1.4		3.3	V
EN Input Leakage	I_{EN_L}	$V_{IN}=3.3\text{V}$, $V_{EN}=3.3\text{V}$			1	μA
Output Discharge Resistor	R_{DSC}	$V_{IN}=1.8\text{V}$, $V_{OUT}=1.2\text{V}$, EN=Low		3.8		Ω
Thermal Shutdown Threshold (Note 5)	TSD			150		°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Thermal Shutdown Hysteresis (Note 5)	TSD _{HYS}			20		°C
V _{OUT} Rise Time	t _R	C _{OUT} =22μF, Null load, 10% V _{OUT} to 90% V _{OUT} , see figure 3		200		μs
V _{OUT} Fall Time	t _F	C _{OUT} =22μF, Null load, 90% V _{OUT} to 10% V _{OUT} , see figure 3		100		μs
Turn on Delay Time	t _{d_ON}	C _{OUT} =22μF, Null load, 50% EN to 10% V _{OUT} , see figure 3		120		μs
Turn off Delay Time	t _{d_OFF}	C _{OUT} =22μF, Null load, 50% EN to 90% V _{OUT} , see figure 3		10		μs

Note 1: Stresses beyond “Absolute Maximum Ratings” may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

Note 2: θ_{JA} is simulated at T_A=25°C on Silergy’s demo board.

Note 3: The device is not guaranteed to function outside its operating conditions.

Note 4: Dropout voltage is the voltage difference between the input and the output.

Note 5: This specification is guaranteed by design.



















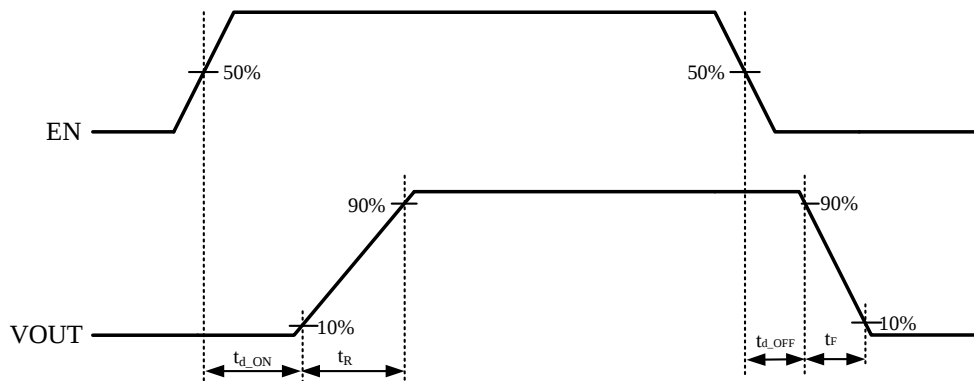








Figure 3. Power ON/OFF Timing Definition







Typical Performance Characteristics

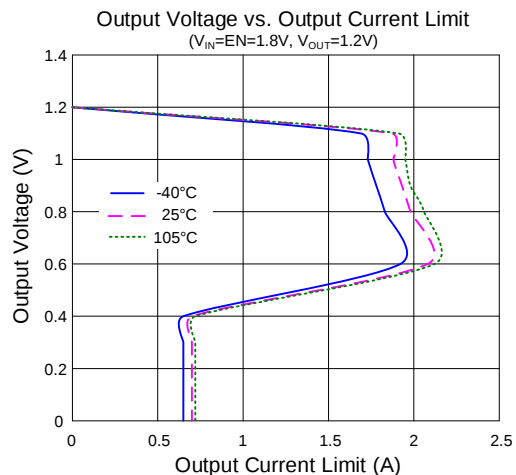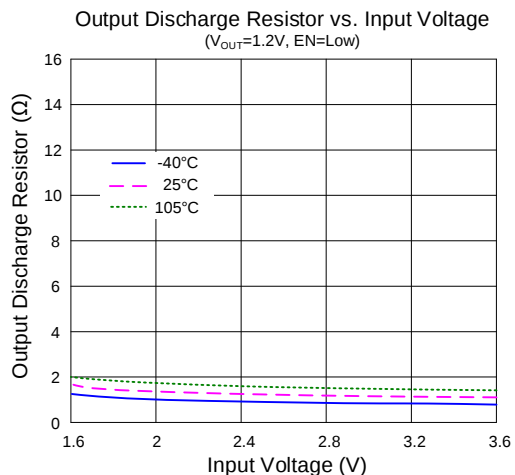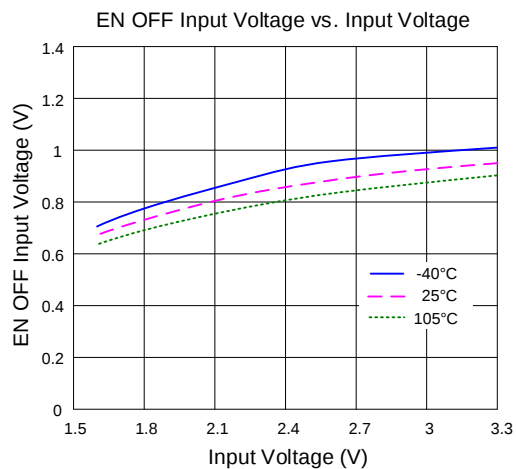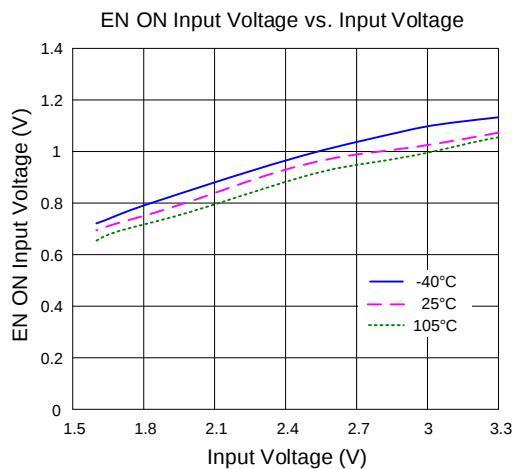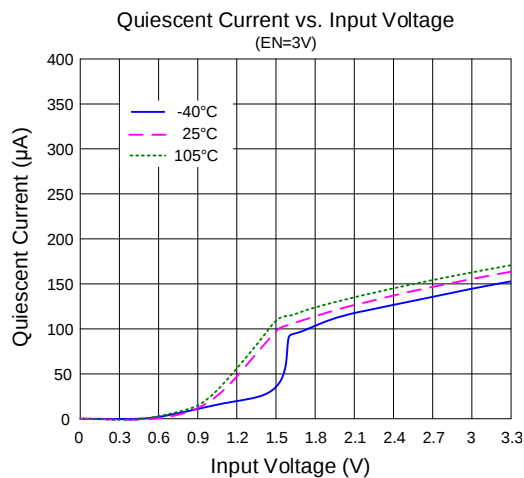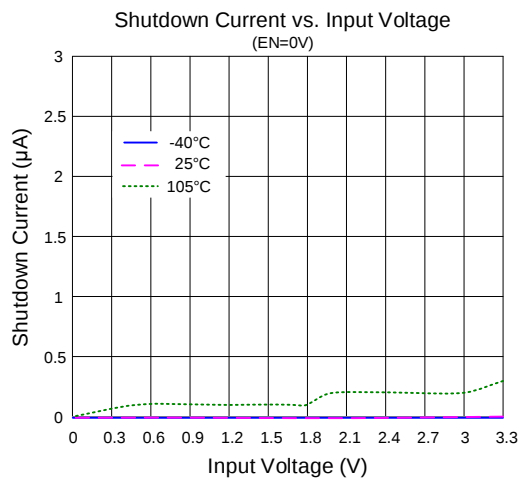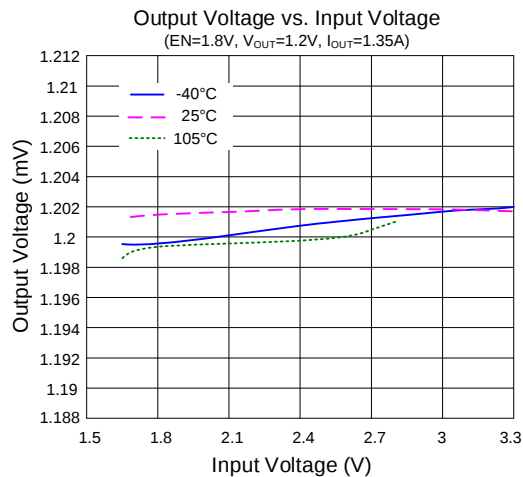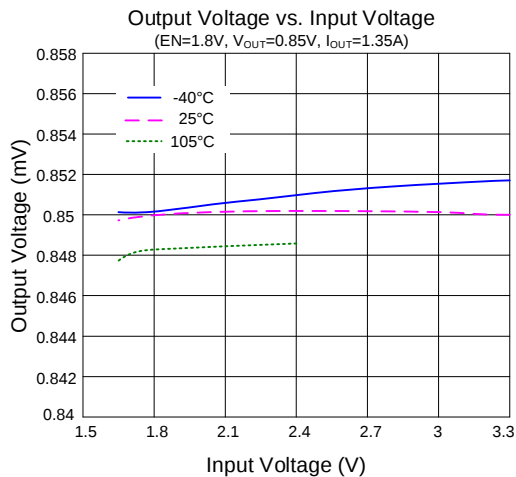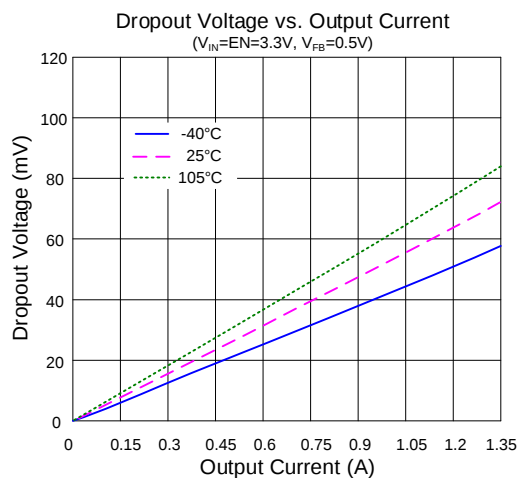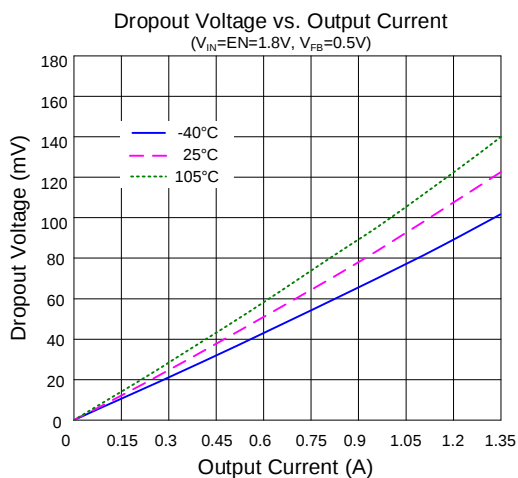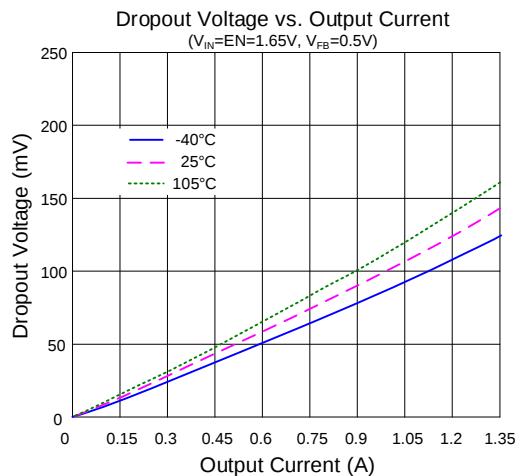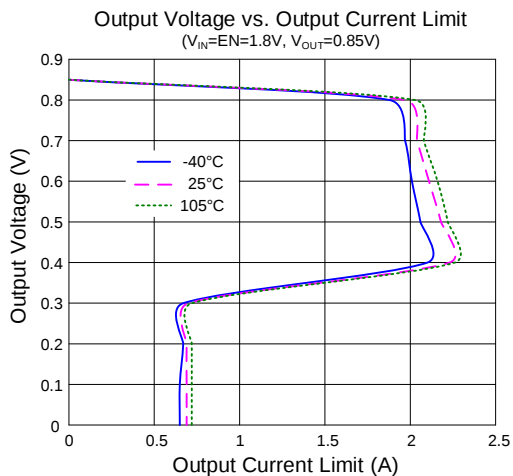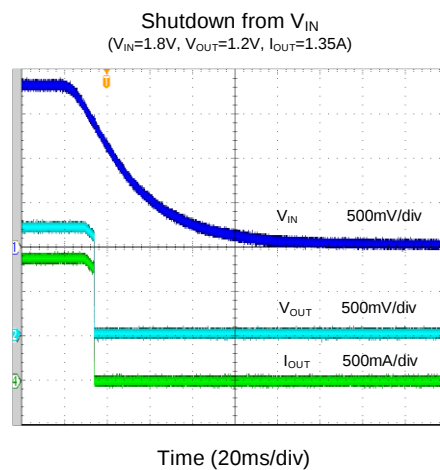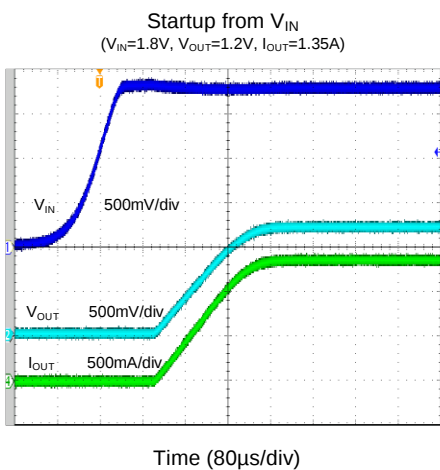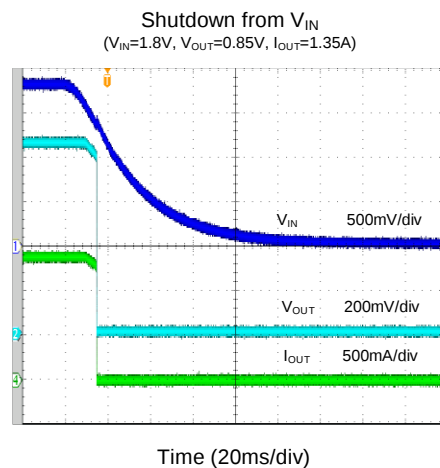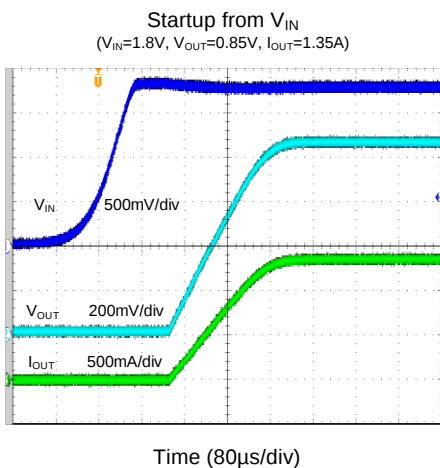

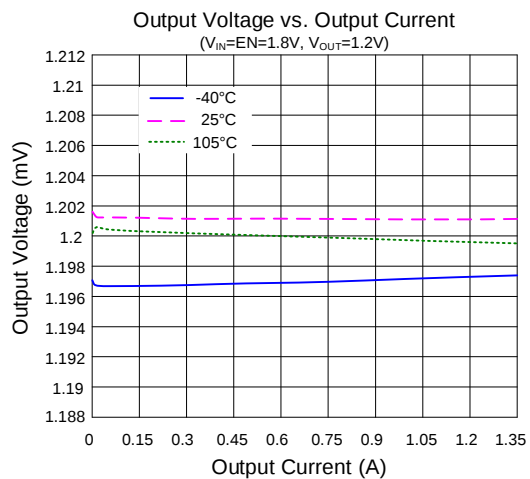

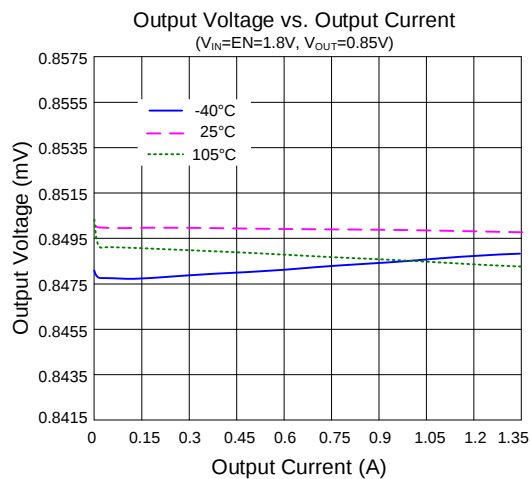

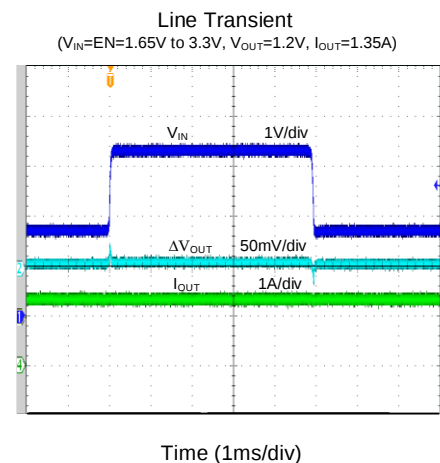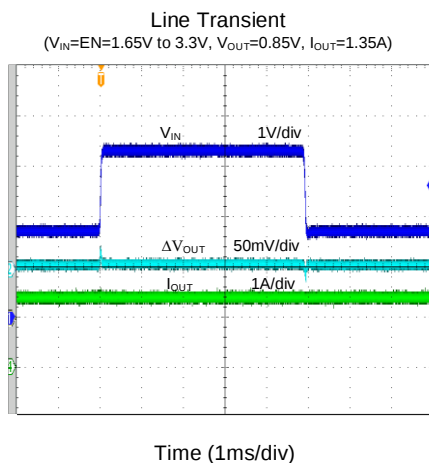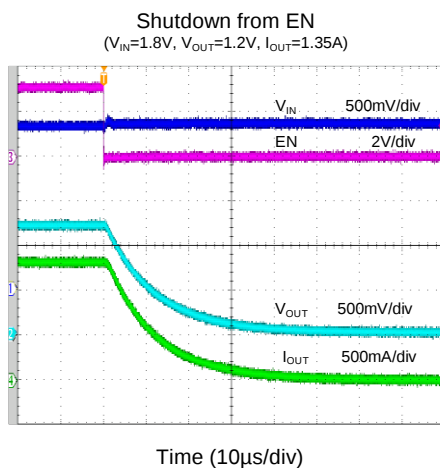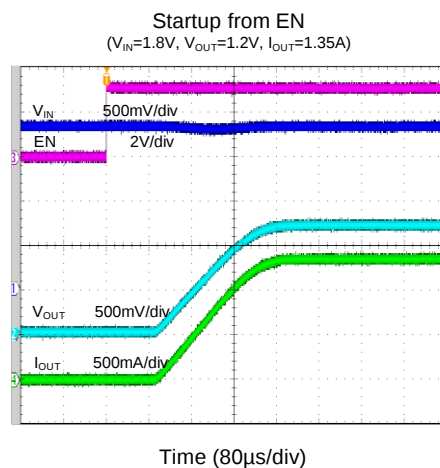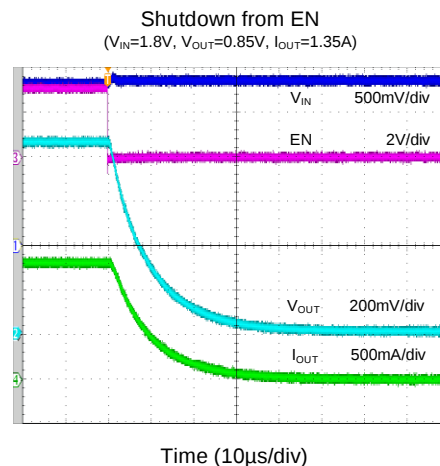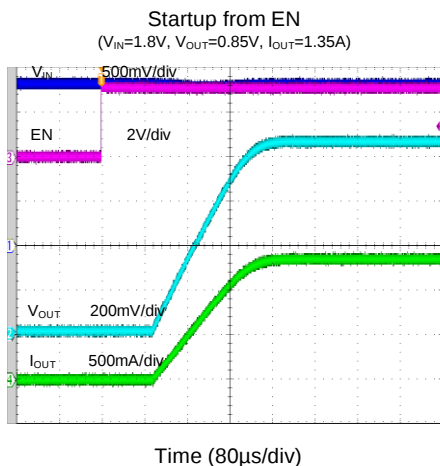

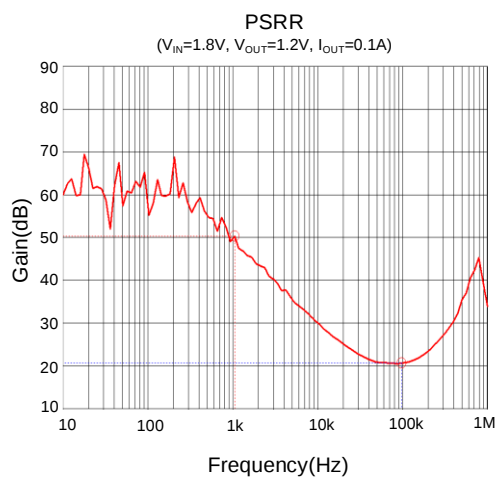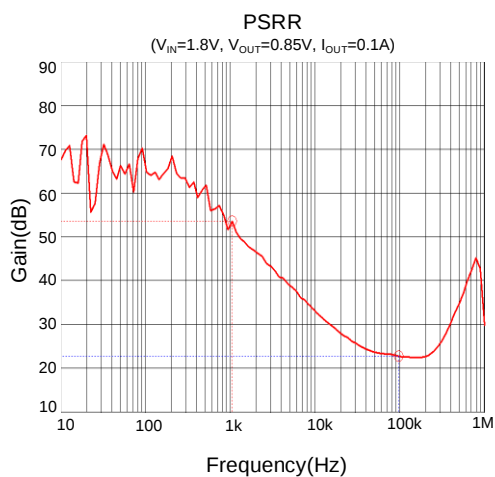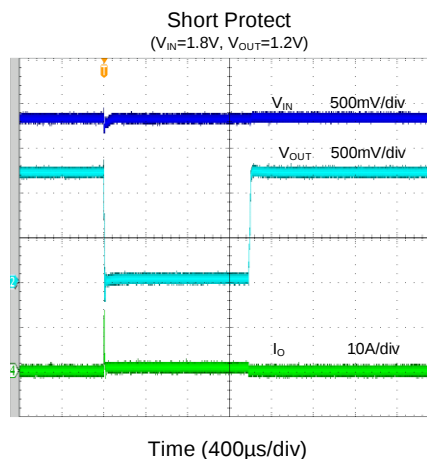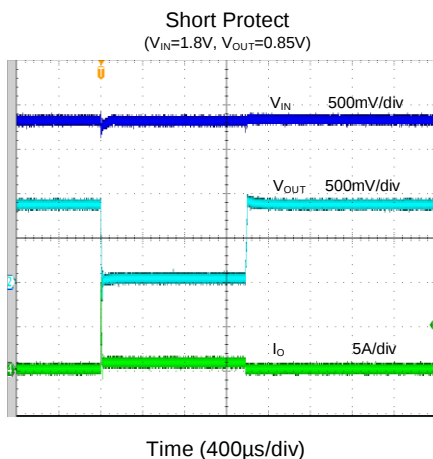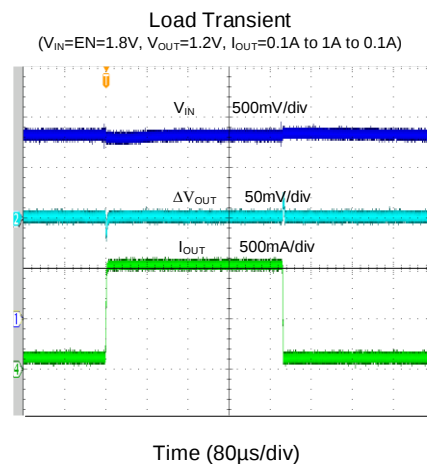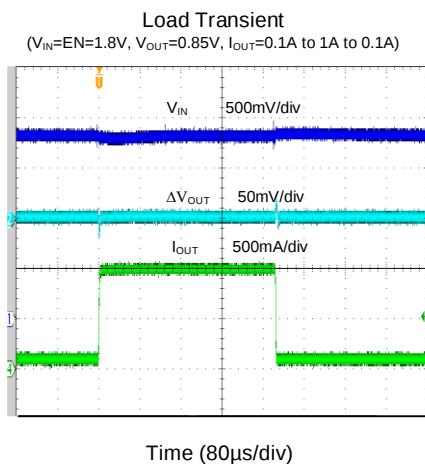

Operation

The SY2A27317A is a 1350mA high current capacity linear regulator, provides high output accuracy, fast line and load transient response. The device with fully protection includes over current limit, output short protection and over temperature operation. The device is available in compact with CSP-2.4mm×2.4mm-36 package.

Applications Information

Input Capacitor C_{IN}

To minimize the potential noise problem and improve power-supply rejection ratio (PSRR) and transient response, place a typical X7R or better grade ceramic capacitor close to the IN and GND pins. Care should be taken to minimize the loop area formed by C_{IN}, and the IN/GND pins. In this case, a 10μF low ESR ceramic capacitor is recommended.

Output Capacitor C_{OUT}

For stable operation over the full temperature range, a 22μF low-ESR ceramic capacitor is recommended. Use 22μF to reduce noise, improve load-transient response and PSRR. Some ceramic dielectrics exhibit large capacitance and ESR variations with temperature.

Feedback Resistor Dividers R₂ and R₃

Choose R₂ and R₃ to program the proper output voltage. To minimize the power consumption under light loads, choose large resistance values (between 1kΩ and 1MΩ) for both resistors. For example, if V_{OUT} is 1.2V, R₃=10kΩ is chosen, then using following equation, R₂ can be calculated to be 10kΩ:

$$R_2 = \frac{0.6V}{V_{OUT} - 0.6V} \times R_3$$

Dropout Voltage

The SY2A27317A has a very low dropout voltage due to its extra low R_{DS(ON)} of the main PMOS determines the lowest usable supply.

$$V_{DROPOUT} = V_{IN} - V_{OUT} = R_{DS(ON)} \times I_{OUT}$$

Short Circuit Protection

The device includes short circuit protection. The current limitation circuit regulates the output current to its fold-back short current threshold to protect IC from damage. Under over current or short circuit condition, the power loss of the IC is relatively high, and that may trigger the thermal protection.

Enable Protection

The enable pin for the SY2A27317A is active high. The output voltage is enabled when the enable pin voltage is above V_{IH(EN)} and disabled when the enable pin voltage is below V_{IL(EN)}. If independent control of the output voltage is not needed, then connect the enable pin to the input.

PCB Layout Guide

For the best performance of the SY2A27317A, the following guidelines must be strictly followed:

- 1) Keep all Power traces (VIN / OUT / GND) as short and wide as possible and use at least 2-ounce copper for all Power traces.
- 2) Place a ground plane under all circuitry to lower both resistance and inductance and improve DC and transient performance.
- 3) Input and output capacitors should be placed closed to the SY2A27317A and connected to ground plane to reduce noise coupling.



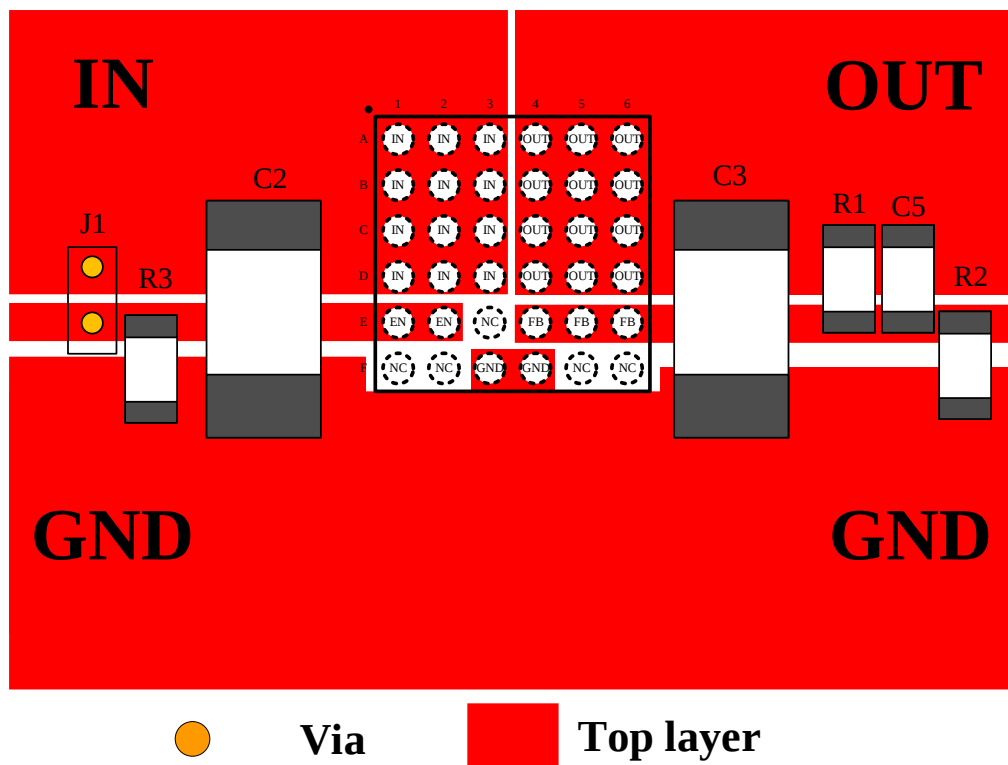


Figure4. PCB Layout Suggestion


CSP 2.4×2.4 -36 Package Outline

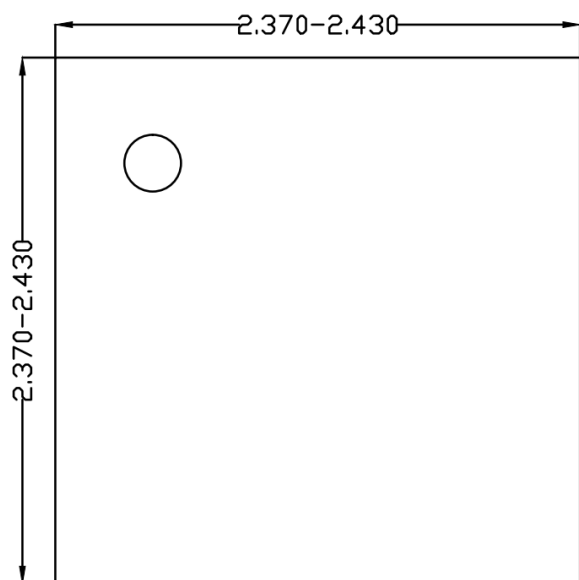


Top View

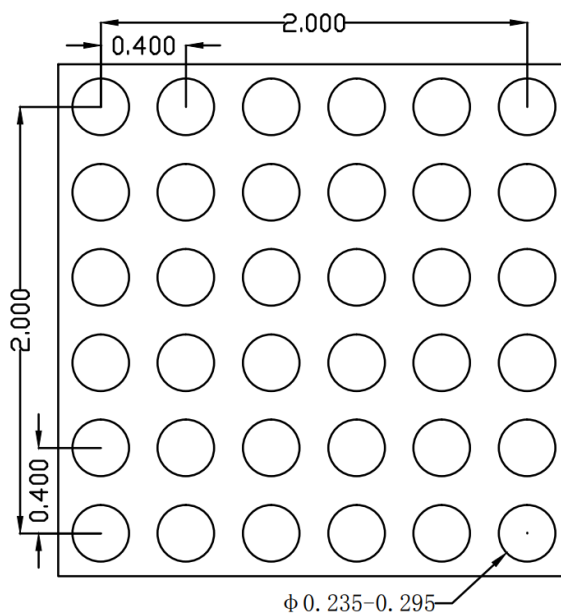

Bottom View

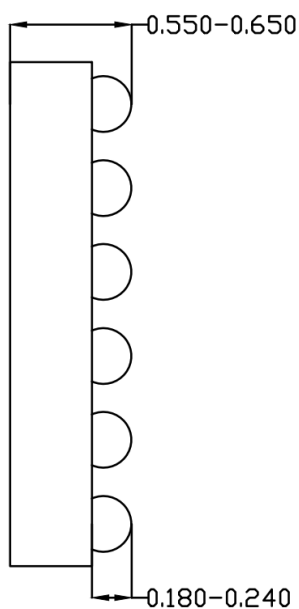

Side View

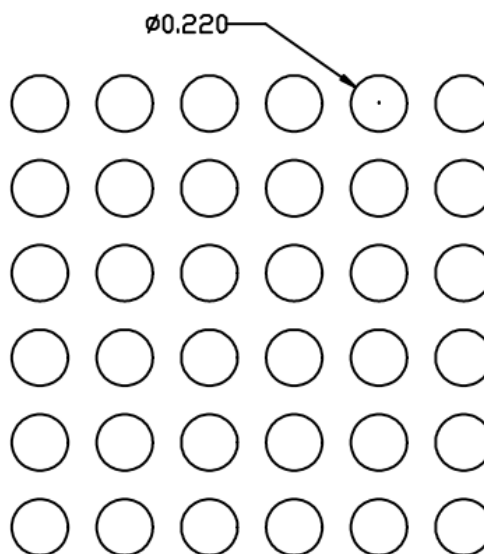


**Recommended PCB layout
(Reference only)**

Notes: All dimension in millimeter and exclude mold flash & metal burr.


Taping & Reel Specification

1. Taping Orientation

CSP2.4×2.4-36

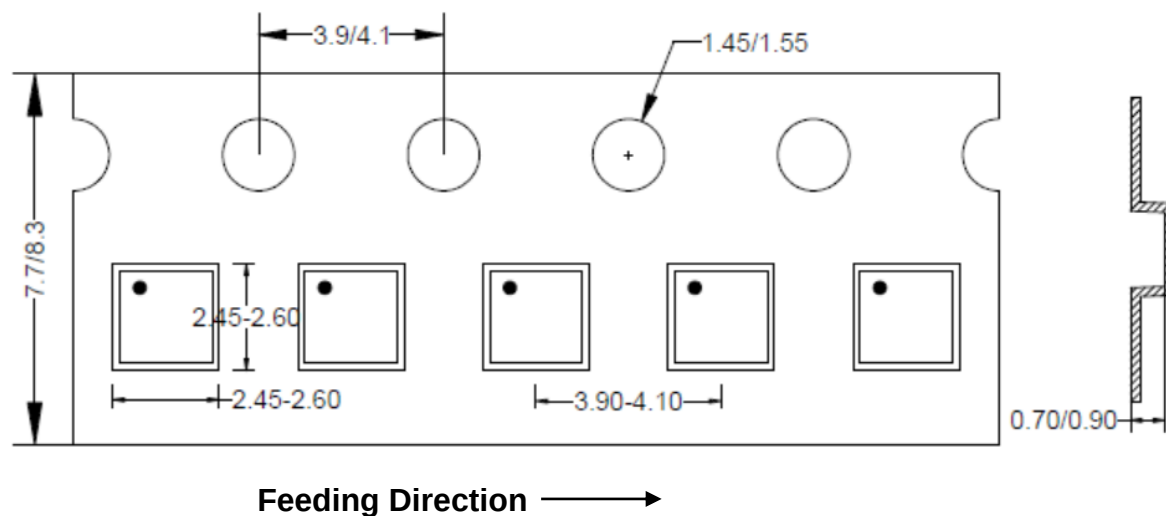

2. Carrier Tape & Reel specification for packages

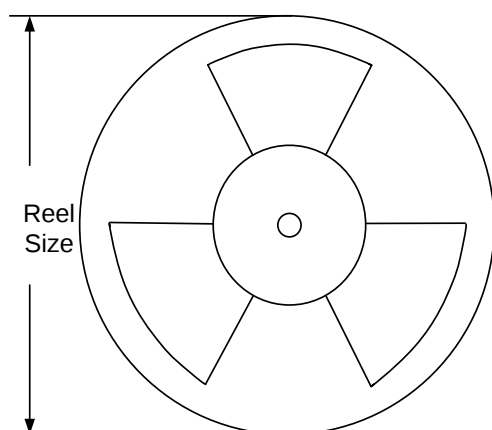

Package Type	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer * length(mm)	Leader * length (mm)	Qty per reel
						(pcs)
CSP2.4×2.4-36	8	4	7"	280	160	3000

3. Others: NA

Revision History

The revision history provided is for informational purpose only and is believed to be accurate, however, not warranted. Please make sure that you have the latest revision.

Date	Revision	Change
Nov.16, 2023	Revision 1.0	Initial Release

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

©2023 Silergy Corp.

All Rights Reserved.