

General Description

The SA21340IAAT is an automotive grade, 150mA high current capacity linear regulator with ultra-low ground current and low drop-out voltage. The SA21340I has a fixed 3.3V output voltage. The device offers protective features, including over-current limit, output short protection and over-temperature protection.

The SA21340I is available in a compact SOT23-5 package.

Features

- Wide Input Voltage Range: 4V to 36V
- Fixed Output Voltage: $3.3V \pm 2\%$
- Low-dropout Voltage: 150mV at Full Load 150mA
- Ultra-low Quiescent Current
- Extremely Low Shutdown Current
- Stability with Tantalum or Ceramic Capacitors
- Excellent Load And Line Regulation
- Over-Current Limit Protection
- Output Short Circuit Protection (Hiccup Mode)
- Over-Temperature Protection
- Moisture Sensitivity Level (MSL): 1
- Package SOT23-5
- RoHS Compliant and Halogen Free
- Automotive AEC- Q100 Grade 1 Qualified

Applications

- Note Book
- Cell Phone
- Automotive LED Lighting ECU
- Automotive Body Modules

Typical Application

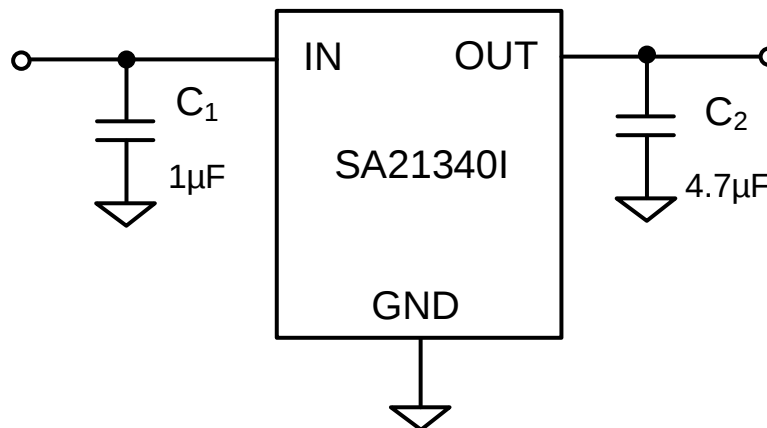



Figure1. Schematic Diagram

Ordering Information

Ordering Part Number	Package Type	Top Mark
SA21340IAAT	SOT23-5 RoHS Compliant and Halogen Free	2fxyz

Device code: 2f
x=year code, y=week code, z= lot number code

Pinout (top view)

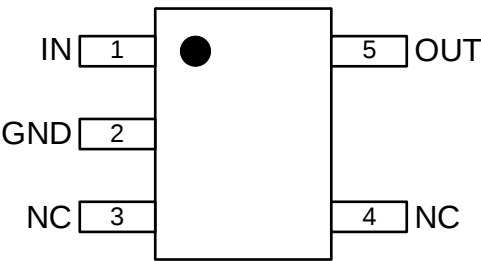

Pin Description

Pin Name	Pin number	Pin Description
IN	1	Power supply input. Bypass this pin to the ground pin with a 1μF capacitor.
GND	2	Ground pin.
OUT	5	Output pin. Bypass this pin to ground pin with a low ESR 4.7μF output capacitor.
NC	3,4	No connection.

Block Diagram

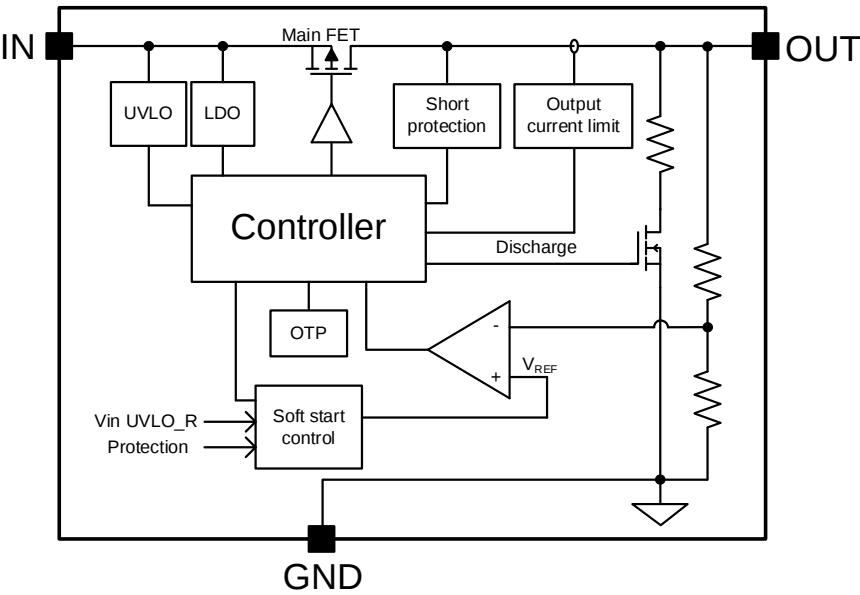


Figure2. Block Diagram

Absolute Maximum Ratings

Parameter (Note1)	Min	Max	Unit
IN	-0.3	40	V
OUT	-0.3	8	
Lead Temperature (Soldering, 10 sec.)		260	°C
Junction Temperature, Operating	-40	150	
Storage Temperature	-65	150	

Thermal Information

Parameter (Note2)	Typ	Unit
θ_{JA} Junction-to-ambient Thermal Resistance	210	°C/W
θ_{JC} Junction-to-case Thermal Resistance	38.4	
P_D Power Dissipation $T_A = 25^\circ\text{C}$	0.47	W

Recommended Operating Conditions

Parameter (Note 3)	Min	Max	Unit
IN	4	36	V
OUT	0	8	
Ambient Temperature	-40	125	°C

Electrical Characteristics

($V_{IN} = V_{EN}=12\text{V}$, $T_J = -40^\circ\text{C} \sim 125^\circ\text{C}$, unless otherwise specified, the values are guaranteed by test design or statistical correlation (Note 4))

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage	V_{IN}		4		36	V
Input Voltage UVLO Threshold	V_{ULVO}	V_{IN} rising	2.9	3.3	4	V
UVLO Hysteresis	V_{UVLO_HYS}			200		mV
Output Voltage	V_{OUT}	$T_J = -40^\circ\text{C} \sim 125^\circ\text{C}$	3.234	3.3	3.366	V
Line Regulation	ΔV_{LNR}	$I_{OUT} = 10\text{mA}$, $4\text{V} \leq V_{IN} \leq 36\text{V}$		1	1.5	mV/V
Load Regulation	ΔV_{LDR}	$V_{IN}=5\text{V}$, $10\text{mA} \leq I_{OUT} \leq 150\text{mA}$		0.25	0.5	%
Dropout Voltage	ΔV_{DROP}	$I_{OUT}=10\text{mA}$		10	20	mV
		$I_{OUT}=150\text{mA}$		150	300	mV
Quiescent Current	I_Q	$I_{OUT}=0\text{mA}$ $V_{IN}=(V_{OUT}+1\text{V}) \sim 36\text{V}$		15	22	μA
Current Limit	I_{LMT}	Force $V_{OUT} = 3\text{V}$	600	900	1200	mA
Output Short Protection Threshold	V_{SHORT}	Force V_{OUT} from 3.3V to 0V	0.264	0.528	0.99	V
Output Short Off Time	t_{SHORT_OFF}			16		ms
Power Supply Rejection Ratio (Note 5)	PSRR	Frequency = 100Hz, $C_{OUT}=4.7\mu\text{F}$, $I_{OUT}=10\text{mA}$, $T_A=25^\circ\text{C}$		60		dB
		Frequency = 100kHz, $C_{OUT}=4.7\mu\text{F}$, $I_{OUT}=10\text{mA}$, $T_A=25^\circ\text{C}$		35		dB
Soft start Time	t_{SS}			1		ms
Thermal Shutdown Temperature (Note 5)	T_{SD}			150		°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Thermal Shutdown Hysteresis (Note 5)	T_{HYS}			20		°C

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.







Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^{\circ}\text{C}$ on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard.

Note 3: The device is not guaranteed to function outside its operating conditions.


Note 4: Unless otherwise stated, limits are 100% production tested under pulsed load conditions such that $T_A \cong T_J = 25^{\circ}\text{C}$. Limits over the operating temperature range (see recommended operating conditions) and relevant voltage range(s) are guaranteed by design, test, or statistical correlation.

Note 5: Guaranteed by design.

Typical Performance Characteristics

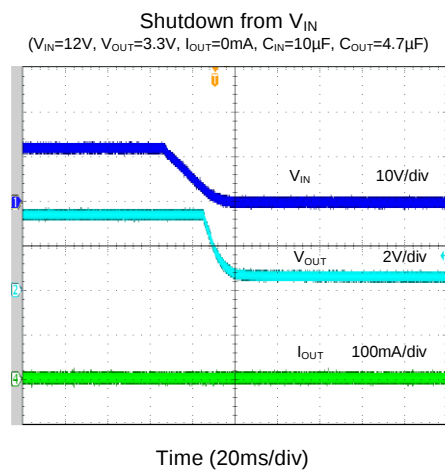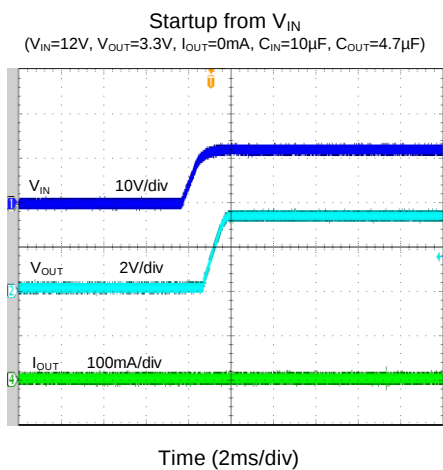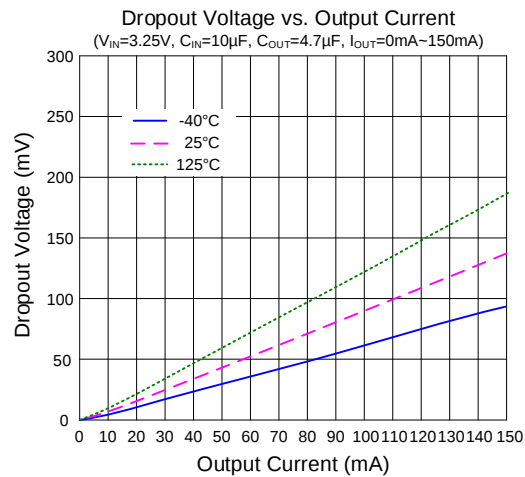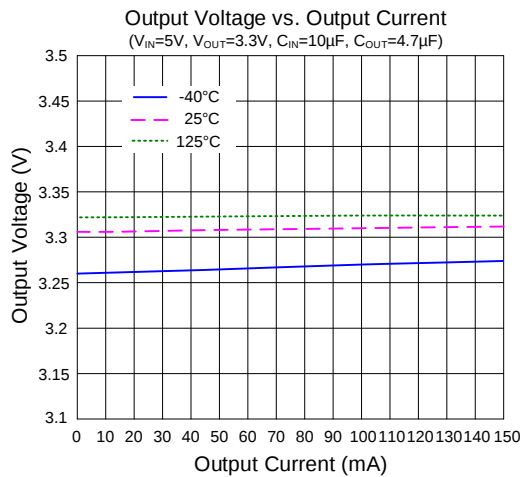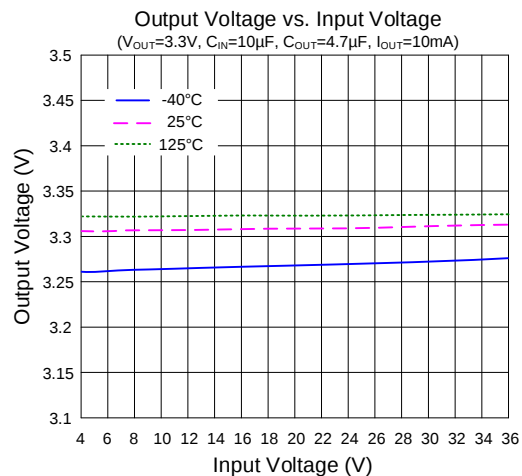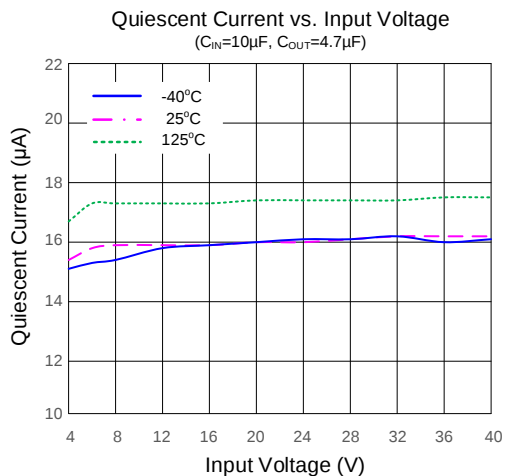


Startup from V_{IN}
($V_{IN}=12V$, $V_{OUT}=3.3V$, $I_{OUT}=150mA$, $C_{IN}=10\mu F$, $C_{OUT}=4.7\mu F$)

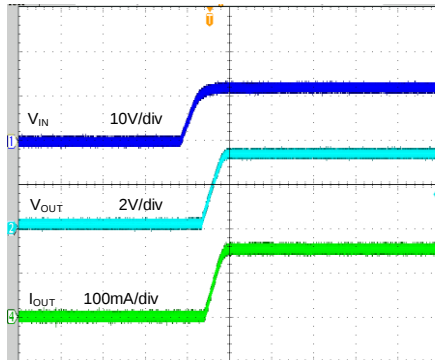


Time (2ms/div)

Shutdown from V_{IN}
($V_{IN}=12V$, $V_{OUT}=3.3V$, $I_{OUT}=150mA$, $C_{IN}=10\mu F$, $C_{OUT}=4.7\mu F$)

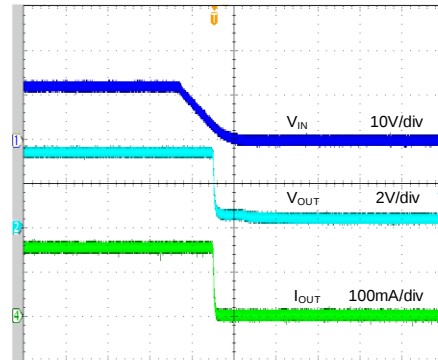


Time (20ms/div)

Load Transient
($V_{IN}=5V$, $V_{OUT}=3.3V$, $C_{IN}=10\mu F$, $C_{OUT}=4.7\mu F$,
 $I_{OUT}=10mA \sim 150mA \sim 10mA$)

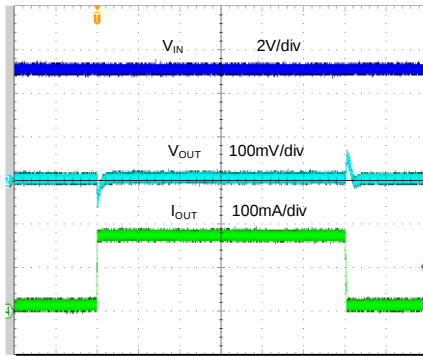


Time (200μs/div)

Line Transient
($V_{IN}=5V \sim 18V \sim 5V$, $V_{OUT}=3.3V$, $C_{IN}=10\mu F$, $C_{OUT}=4.7\mu F$,
 $I_{OUT}=150mA$)

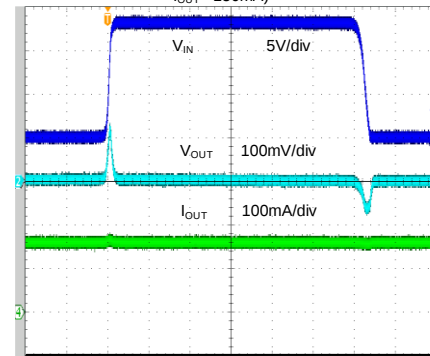


Time (400μs/div)

Short Protection
($V_{IN}=36V$, $V_{OUT}=3.3V$, $C_{IN}=10\mu F$, $C_{OUT}=4.7\mu F$)

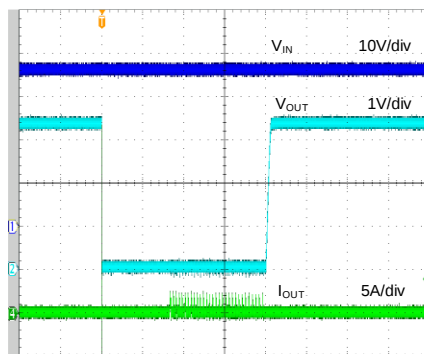

Time (10ms/div)

PSRR

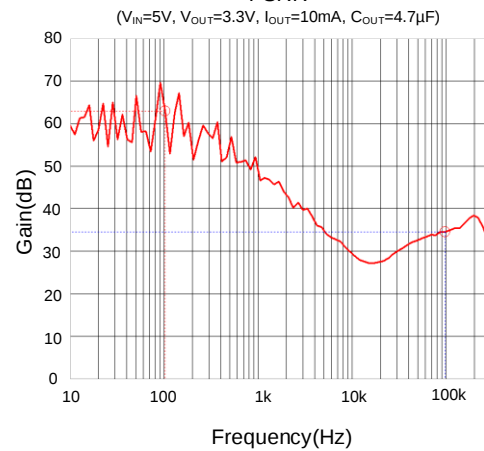

Applications Information

The SA21340I is a 150mA high-current capacity linear regulator with ultra-low ground current and low drop-out voltage. This device supports a fixed 3.3V output voltage, also offers protective features, including over-current limit, output short protection and over-temperature protection.

Input Capacitor C_{IN}

To minimize the potential noise problem and improve power-supply rejection ratio (PSRR) and transient response, place a typical X7R or high-grade ceramic capacitor close to the IN and GND pins. Care should be taken to minimize the loop area formed by C_{IN}, and the IN/GND pins. A 1μF low ESR ceramic capacitor is recommended for most applications.

Output Capacitor C_{OUT}

For stable operation over the full temperature range, a 4.7μF low-ESR ceramic capacitor is recommended for C_{OUT}. Using larger output-capacitor values such as 22μF can help with reducing the noise, improving load-transient response and PSRR. Some ceramic dielectrics exhibit large capacitance and ESR variations with temperature.

Over Temperature Protection (OTP)

The SA21340I includes over-temperature protection (OTP) circuitry to prevent overheating due to excessive power dissipation. This will turn off the device when the junction temperature exceeds 150°C. Once the junction temperature cools down by approximately 20°C the IC will resume normal operation.

Dropout Voltage

The SA21340I has a very low dropout voltage due to its extra low R_{DS(ON)} of the main PMOS determines the lowest usable supply.

$$V_{\text{DROPOUT}} = V_{\text{IN}} - V_{\text{OUT}} = R_{\text{DS(ON)}} \times I_{\text{OUT}}$$

Output Short Circuit Protection

If V_{OUT} drops lower than 16% of the OUT set point, the short circuit protection mode will be initiated, and the device will be shut down for approximately 16ms. The device will then restart with a complete soft-start cycle. If the short circuit condition remains another 'hiccup' cycle of shutdown and restart will continue indefinitely unless the OTP threshold is reached.

Thermal Considerations

The SA21340I can deliver a current of up to 150mA over the full operating temperature range. However, the maximum output current must be derated at higher ambient temperature. With all possible conditions, the junction temperature must be within the range specified under operating conditions. Power dissipation can be calculated based on the output current and the voltage drop across regulator.


$$P_D = (V_{\text{IN}} - V_{\text{OUT}}) \times I_{\text{OUT}} + V_{\text{IN}} \times I_{\text{GND}}$$

The final operating junction temperature for any set of condition can be estimated by the following thermal equation:

$$P_{D(\text{MAX})} = (T_{J(\text{MAX})} - T_A) / \theta_{JA}$$

Where T_{J(MAX)} is the maximum junction temperature of die and T_A is the maximum ambient temperature. The junction to ambient thermal resistance (θ_{JA}) footprint is 210°C/W for SOT23-5 package.

Schematic

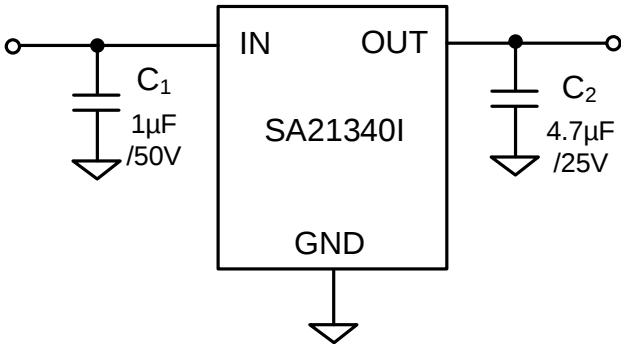

BOM List

Designator	Description	Part Number	Manufacturer
C ₁	1µF/50V, 0603,X7R	GCM188R71H105K	Murata
C ₂	4.7µF/16V,0603, X7R	GCJ188C70J475K	Murata

PCB Layout Guide

For optimal performance of the SA21340IAAT, the following guidelines must be strictly followed:

1. Place the input/output capacitors as close to the device as possible, minimizing the loop formed by these connections to improve transient performance.
2. Keep all power traces as short and wide as possible. And a 2-layer or 4-layer board is recommended for thermal performance and better current-handling capability.



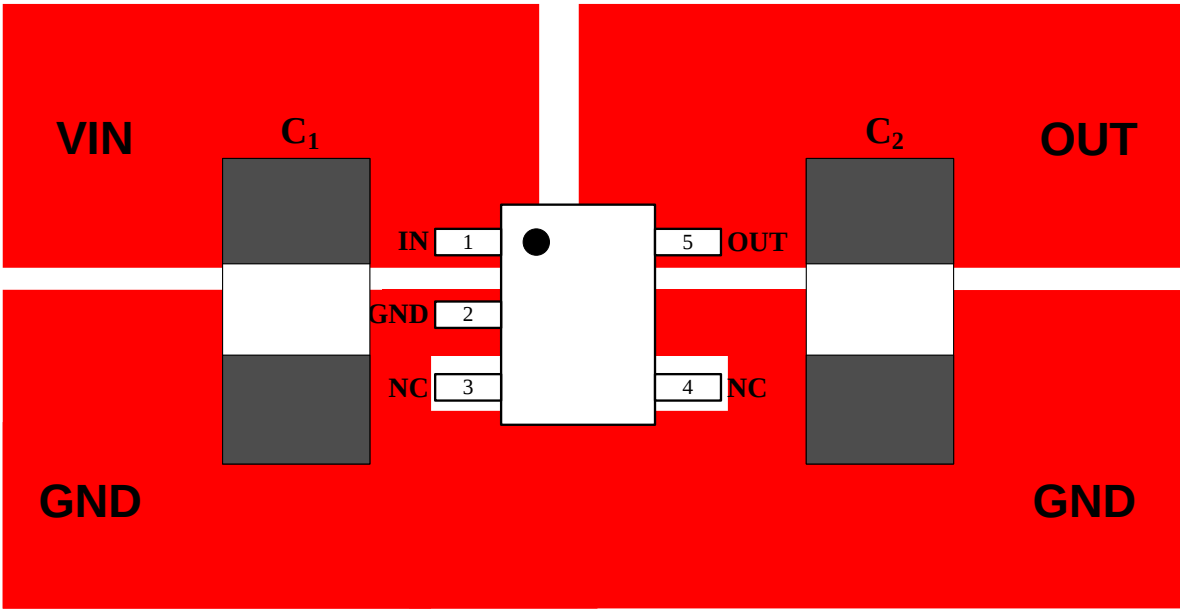


Figure3. PCB Layout Suggestion


SOT23-5 Package Outline Drawing

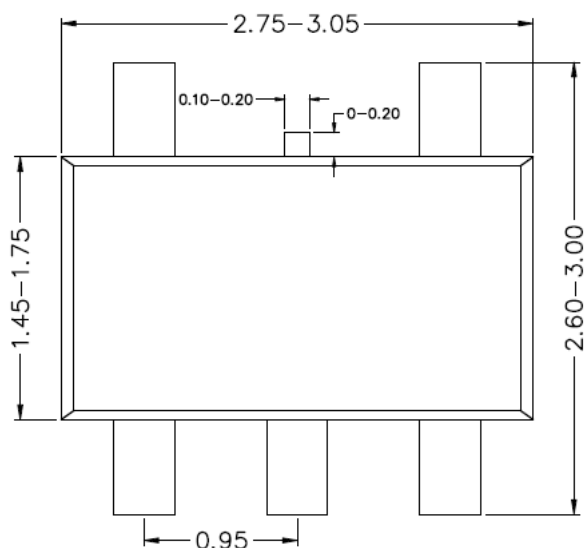


Top view

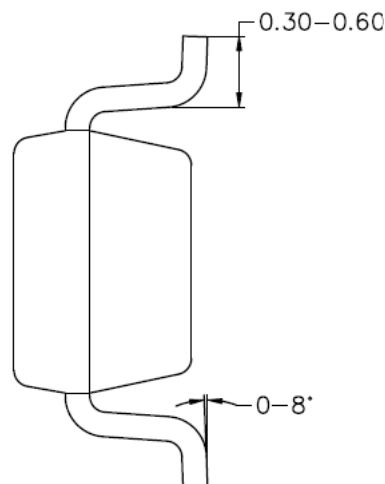

Side view

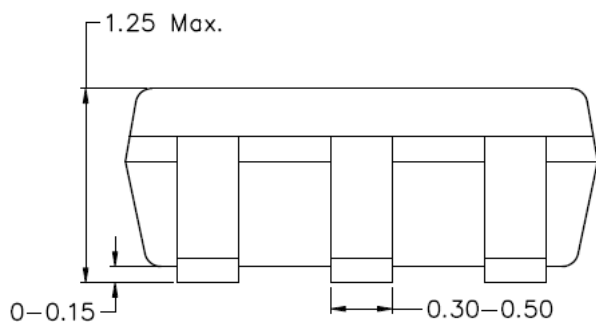

Front view

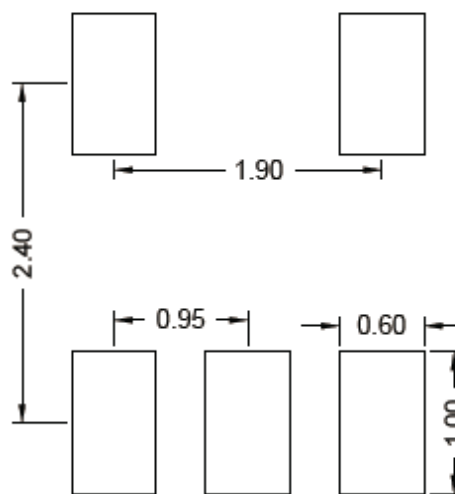


**Recommended PCB pad Layout
(Reference only)**

Notes: All dimension in millimeter and exclude mold flash & metal burr.


Tape and Reel Information

1. Tape Dimension and Pin1 Orientation

SOT23-5

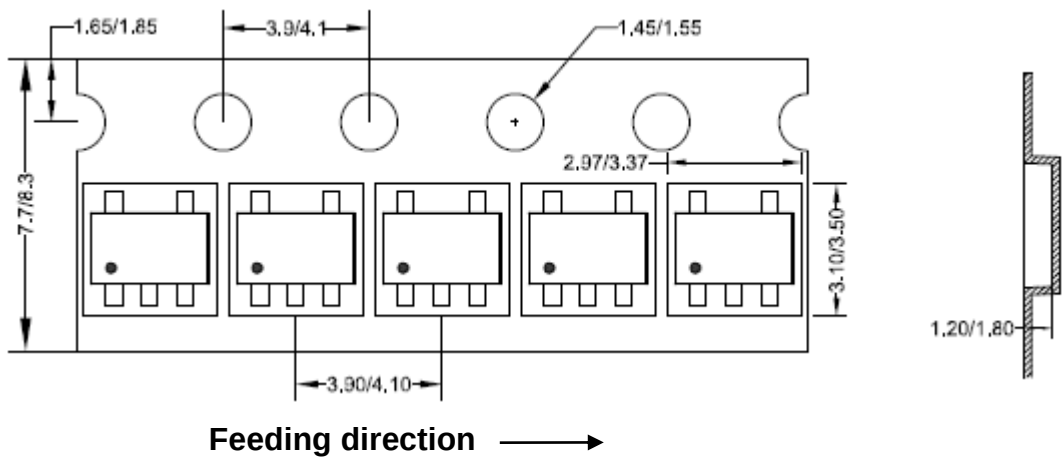

2. Reel Dimensions

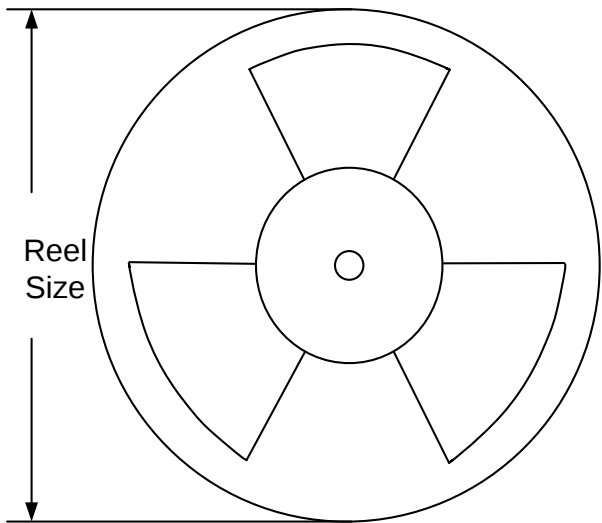

Package type	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel
SOT23-5	8	4	7"	280	160	3000

Revision History

The revision history provided is for informational purposes only and is believed to be accurate; however, not warranted. Please make sure that you have the latest revision.

Date	Revision	Change
May 29, 2025	Revision 1.0	Initial Release

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

©2025 Silergy Corp.

All Rights Reserved.