

General Description

The SY5040 is a peak current mode SSR Flyback controller that combines CCM and QR mode together to minimize transformer size and achieve high efficiency. Under low line and heavy load condition, the SY5040 works under CCM, while under high line or medium load condition, it works under QR mode (valley switching). The SY5040 adopts frequency fold-back control when the load decreases to achieve the high average efficiency. When the load decreases to very light level, the SY5040 will enter burst mode and the switching frequency is fixed to 25kHz to avoid audible noise.

The SY5040 also provides comprehensive and reliable protections including brownout protection, output OVP, external OTP, OLP, VCC OVP, internal OTP, etc.

The SY5040 is available with a compact SOT23-6 package.

Features

- Rated Switching Frequency: 65kHz
- CCM+QR Combined Operating Mode
- Frequency Fold Back and Burst Mode Control
- Minimum Switching Frequency Limited to 25kHz
- F_{sw} Modulation to Reduce EMI Noise
- Programmable Brownout Protection by ZCS Pin
- Programmable Output OVP by ZCS Pin
- Programmable External OTP by CS Pin
- OLP, VCC OVP, Internal OTP
- Secondary Diode Short Circuit Protection
- OCP Compensation over Universal Input Range
- Low Start up Current: <4μA
- Gate Drive Capability: 210mA/420mA(source/sink)
- Internal Soft Start Process
- RoHS Compliant and Halogen Free
- Compact Package: SOT23-6

Applications

- AC/DC Power Supply
- Note Book Adapter
- LCD TV
- Auxiliary Power Supply

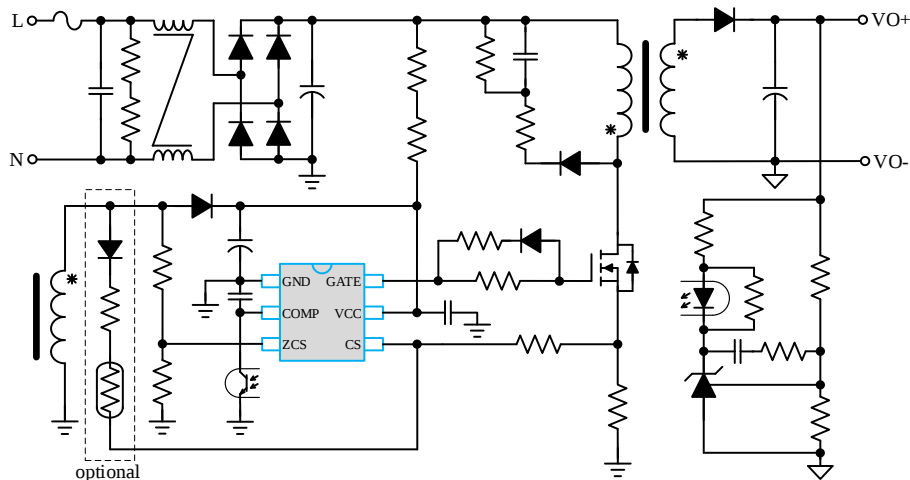



Fig. 1. Typical Application Circuit

Ordering Information

Ordering Part Number	Package type	Top Mark
SY5040ABC	SOT23-6 RoHS-Compliant and Halogen-Free	Ya xyz

x = year code, y = week code, z = lot number code

Pinout (top view)

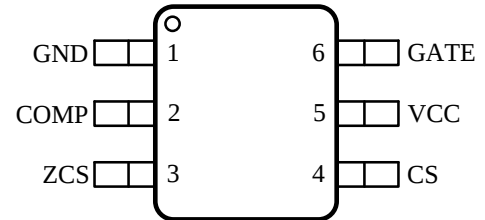

Pin Description

Pin No	Pin Name	Pin Description
1	GND	Ground pin
2	COMP	This pin is connected to an opto-coupler for output voltage feed back
3	ZCS	Multi-function including valley detecting, brownout protection and output OVP
4	CS	Primary peak current sense pin, also used for external OTP
5	VCC	Power supply pin
6	GATE	Gate drive pin

Block Diagram

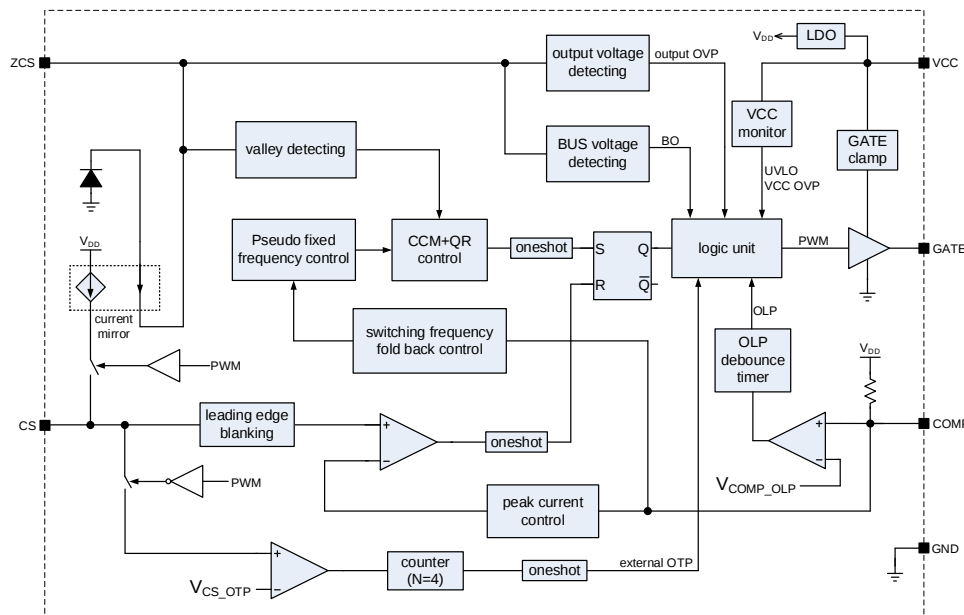


Fig.2 Block Diagram

Absolute Maximum Ratings

Parameter (Note 1)	Min	Max	Unit
VCC	-0.3	34	V
GATE	-0.3	15	
CS, COMP, ZCS	-0.3	3.6	
Supply Current I _{VCC}		20	mA
Junction Temperature, Operating	-45	150	°C
Lead Temperature (Soldering, 10 sec.)		260	
Storage Temperature Range	-65	150	
Dynamic CS Negative Current in 1us Duratio		-2	mA
Dynamic CS Negative Voltage in 1us Duration		-0.7	V
Dynamic ZCS Negative Current in 20us Duration		-2	mA
Dynamic ZCS Negative Voltage in 20us Duration		-0.7	V

Thermal Information

Parameter (Note 2)	Min	Max	Unit
θ_{JA} Junction-to-ambient Thermal Resistance		125	°C/W
θ_{JC} Junction-to-case Thermal Resistance		60	
PD Power Dissipation TA = 25°C		1.1	W

Recommended Operating Conditions

Parameter	Min	Max	Unit
VCC	12	27	V
Junction Temperature Range	-40	125	°C
Ambient Temperature Range	-40	105	°C

Electrical Characteristics

($V_{VCC} = 12V$ (Note 3), $T_A = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
VCC Pin	Turn-on Threshold	V_{VCC_ON}	20	21.5	23	V
	Turn-off Threshold	V_{VCC_OFF}	8	9	10	V
	OVP Threshold	V_{VCC_OVP}	27.7	29.7	31.7	V
	Current Sink under Over Voltage Condition	I_{VCC_OVP}	$V_{VCC}=V_{CC_OVP}+0.1V$		11	mA
	Start Up Current	I_{VCC_ST}	$V_{VCC}=18V$		2.6	μA
	Operating Current	I_{VCC_OPT}	$C_L=1nF, F_{SW}=65kHz$		1.9	mA
	Quiescent Current	I_{VCC_Q}	Under sleep mode		200	μA
	Current Sink under Fault Condition	I_{VCC_FAULT}	0.8	1	1.3	mA
CS Pin	Maximum Peak Current Sense Voltage	V_{CS_MAX}	0.92	0.97	1.03	V
	Primary OCP Threshold	V_{CS_OCP}	1.24	1.31	1.38	V
	Leading Edge Blanking Time	T_{CS_LEB}		470		ns
	External OTP Threshold	V_{CS_OTP}	0.94	1	1.06	V
	OCP Compensation Current	I_{CS_OCPC}	$I_{ZCS}=500\mu A$	90	105	μA
			$I_{ZCS}=400\mu A$		90	μA
			$I_{ZCS}=300\mu A$		64	μA
			$I_{ZCS}=200\mu A$		36	μA
	CS Pin Short Circuit Protection Threshold	V_{CS_SCP}		100		mV
	CS Pin Short Circuit Detecting Blanking Time	$T_{CS_SCP_BLK}$		3.5		μs
ZCS Pin	Output OVP Threshold	V_{ZCS_OVP}	1.9	2	2.1	V
	Blanking Time for V_{OUT} Sense after V_{GATE} Jumps from High to Low	T_{VOSEN_BLK}	1.6	2.6	3.6	μs
	Brown Out Threshold Current	I_{BO}	90	100	110	μA
	Hysteresis for Brown In	I_{BO_HYS}		10		μA
	Brown Out Debounce Time	T_{BO_DBC}	55	90	125	ms
Switching Frequency	Rated Switching Frequency	F_{SW_RATE}	60	65	70	kHz
	Minimum Switching Frequency	F_{SW_MIN}	20	25	30	kHz
	Frequency Modulation Amplitude	F_{SWMOD_AMP}	$V_{COMP}=1.8V, CCM$		± 6.5	kHz
	Frequency Modulation Period	T_{SWMOD}		4		ms
COMP	Internal Pull-up Voltage	V_{COMP_PU}		2.7		V
	Internal Pull-up Resistor	R_{COMP_PU}		20		k Ω

COMP	Threshold to Enter Sleep Mode	V _{COMP_INSLEEP}	V _{COMP} falling down	0.25	0.3	0.35	V
	Threshold to Exit Sleep Mode	V _{COMP_EXSLEEP}	V _{COMP} rising up	0.37	0.42	0.47	V
	OLP Threshold	V _{COMP_OLP}		2.0	2.25	2.5	V
	OLP Debounce Time	T _{OLP_DBC}		55	90	125	ms
GATE Pin	Gate Clamp Voltage	V _{GATE_CLAMP}	V _{VCC} =20V		14		V
	Maximum Source Current	I _{SOURCE_MAX}	C _L =10nF		210		mA
	Maximum Sink Current	I _{SINK_MAX}	C _L =10nF		420		mA
	Maximum ON Time	T _{ON_MAX}			13		μs
Internal OTP	Internal OTP Threshold	T _{OTP}			140		°C
	Hysteresis	T _{HYS}			15		°C
Soft Start	Soft Start Time	T _{SS}			7		ms






Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^{\circ}\text{C}$ on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard. Test condition: Device mounted on “2 x 2” FR-4 substrate PCB, 2oz copper, with minimum recommended pad on top layer and thermal via to bottom layer ground plane.

Note 3: Increase VCC pin voltage gradually higher than V_{VCC_ON} voltage then turn down to 12V.

Typical Performance Characteristics

(Test condition: V_{IN} : 90~264Vac; output spec: 20Vdc_3.25A; output cable: 18AWG_1.8m; $T_A=25\pm5^\circ\text{C}$)

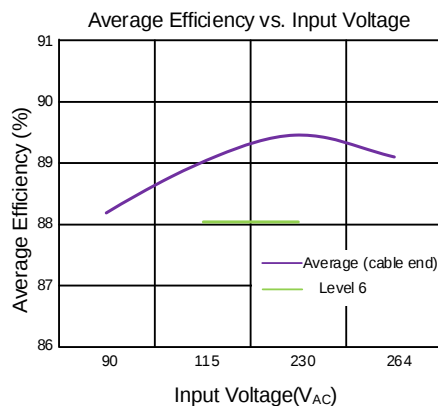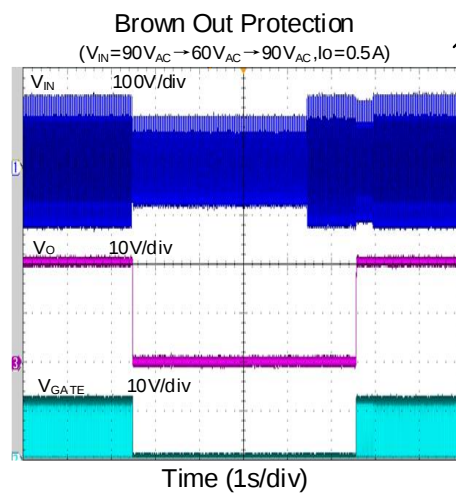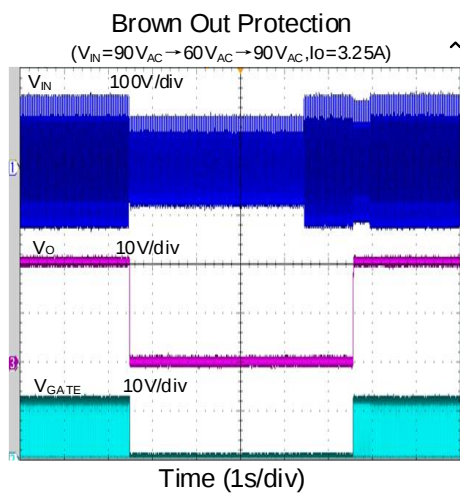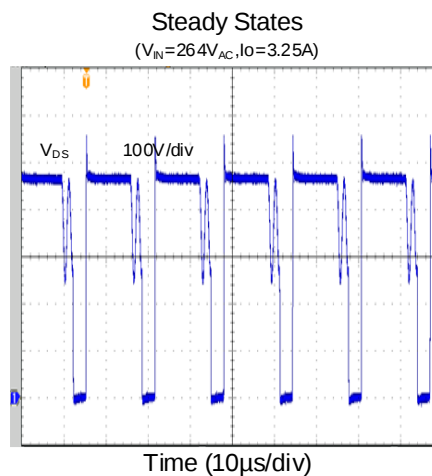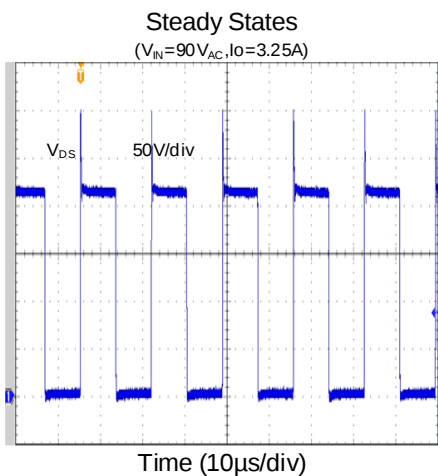


Detailed Description

CCM+QR Operating Principle

The SY5040 adopts the mixed control method that combines CCM and QR mode together. Under low input voltage and heavy load condition, it will operate under CCM. Under high input voltage or medium load condition, it will operate under QR mode. Due to this control method, the optimized efficiency and transformer size can be achieved.

OCP Compensation

Generally, OCP level under low input voltage condition is lower than that under high input voltage condition. The SY5040 adopts OCP compensation function to make the variation of OCP level over universal input voltage range to be smaller. The compensation is achieved by adding a resistor R_{OCPC} between CS pin and peak current sense resistor. The larger R_{OCPC} is, the lower OCP level under high input voltage will be. This compensation resistor R_{OCPC} will be adjusted by customers for their specified power converter design.

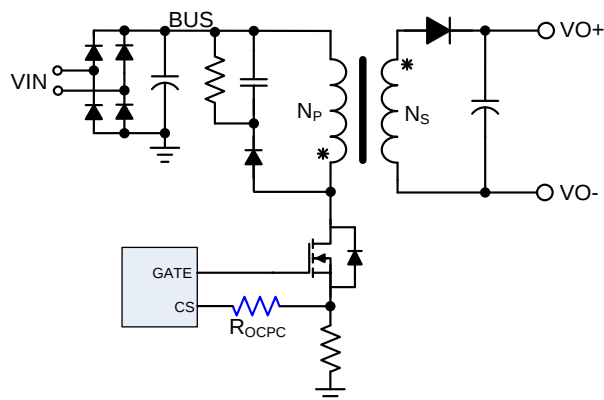


Programmable Brown Out Protection

The SY5040 will sense the BUS voltage by ZCS pin and programmable brown out protection can be achieved. When the primary side power MOS is turned on, the ZCS pin will be internal clamped to 0V, since the voltage on auxiliary winding (negative) is proportional to BUS voltage, the current flow out of ZCS pin will be proportional to BUS voltage. The SY5040 will compare the current flow out of ZCS pin with an internal reference current (typical 100uA), if the current flow out of ZCS pin is lower than the reference current, a timer will begin to count, and when the timer elapse, brown out protection will be triggered, the IC will stop switching and enter auto-recovery mode. During the Vin start-up, when the VCC rises to V_{CC_ON} threshold, the GATE pin will turn on primary MOS for a short duration (~2us) and the IC will identify if the input voltage is above brown in level (110uA). Only when brown in condition is meet, the IC will start normal operating, otherwise, the IC will stop switching and enter auto-recovery mode. The upper resistor of the ZCS pin resistor divider which is connected between auxiliary winding will set input brown out

protection level. Input voltage brown out level (RMS) is calculated as below equation:

$$V_{IN_BO} = \frac{I_{BO}}{\sqrt{2}} \cdot \frac{N_p}{N_s} \cdot R_H$$

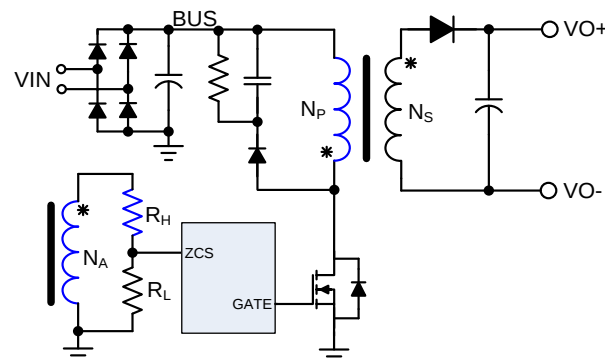


Programmable Output OVP

The SY5040 will sense output voltage by ZCS pin and programmable output OVP can be achieved. When the primary power MOS is turned off, the voltage on auxiliary winding will be proportional to output voltage. The ZCS pin will sense the output voltage by a resistor divider connected between auxiliary winding. When the ZCS pin voltage rises above OVP threshold V_{ZCS_OVP} , the IC will stop switching and enter auto-recovery mode. The output OVP threshold is calculated as below:


$$V_{O_OVP} = V_{ZCS_OVP} \cdot \frac{N_s}{N_a} \cdot \frac{R_H + R_L}{R_L}$$

Note: The upper resistor R_H should be determined firstly according to input brown out level set point, and then the lower resistor R_L of ZCS pin resistor divider is calculated according to above equation.

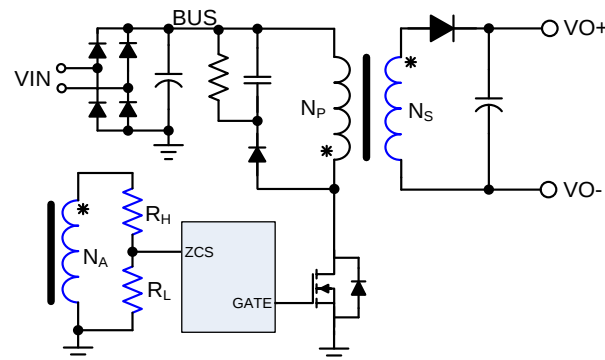

When the primary power MOS is turned off, there will be a parasitic resonance on auxiliary winding voltage as shown in below figure. To avoid the false trigger of output OVP by the parasitic resonance, a blanking time (T_{VOSEN_BLK}) is adopted after primary power MOS is turned off. The SY5040 only samples

the auxiliary winding voltage after the blanking time elapse, so reliable output OVP can be achieved. It is recommended that the parasitic resonant time should be decayed to very small level within 1.5us after primary power MOS is turned off.

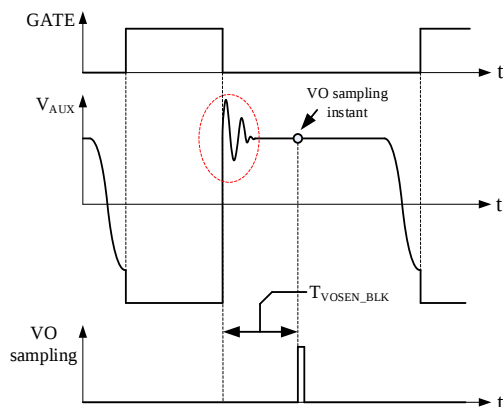


Programmable External OTP

The SY5040 can achieve programmable external OTP through the CS pin. When the primary MOS is turned off, the voltage on auxiliary winding will be proportional to output voltage. Since the output voltage is a constant value under steady state, the voltage on auxiliary winding is also a nearly constant value. It will be used as a reference voltage. A NTC resistor and the OCP compensation resistor R_{OCPC} will form a voltage divider (peak current sense resistor is very small and is neglected). Under the normal temperature, the NTC resistor is very large, and the CS pin voltage will be low level. When NTC's temperature rises, the NTC resistor becomes smaller and smaller, the CS pin voltage will become higher and higher. If the CS pin voltage is higher than OTP threshold V_{CS_OTP} , and last for 4 consecutive switching cycles, the external OTP will be triggered. The IC will stop switching and enter auto-recovery mode. Resistance of NTC resistor at external OTP set point is calculated as below equation:

$$R_{NTC(OTP)} = R_{OCPC} \cdot \left(\frac{\frac{N_A}{N_S} \cdot V_O - V_{D1}}{V_{CS_OTP}} - 1 \right) - R_{ADJ}$$

Where V_{CS_OTP} is CS pin OTP threshold (typical=1.0V), R_{ADJ} is used to fine tune external OTP threshold.

Note: OCP compensation resistor R_{OCPC} should be firstly determined according to OCP level over 90V~264V input range. Then the external OTP parameter is calculated according to above equation. It is recommended that diode D1 should be a small signal switching diode such as 1N4148, BAV21, etc

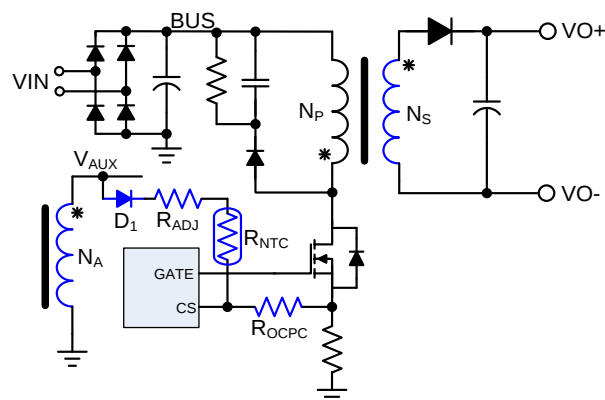

Secondary Diode Short Circuit Protection

Under the secondary diode short circuit condition, when the primary power MOS is turned on, the primary current will increase with very high di/dt rate. After CS pin leading edge blanking time elapse, primary peak current signal V_{CS} will rise above 0.97V (maximum peak current limit level under normal condition). The SY5040 defines an OCP threshold V_{CS_OCP} , when V_{CS} rises above V_{CS_OCP} after leading edge blanking time elapse, and last for 4 consecutive switching cycles, secondary diode short circuit protection will be triggered, IC will stop switching and enter auto-recovery mode.

OLP

When the over load condition happens, COMP pin voltage will be pulled up to high level, and the primary peak current will reach the maximum value. The SY5040 will compare COMP pin voltage with an OLP threshold, when V_{COMP} is higher than the OLP threshold, a timer will begin to count, and if V_{COMP} is continuously higher than OLP threshold which result in OLP timer elapse, the SY5040 will stop switching and enter auto-recovery mode.

VCC OVP

Under abnormal conditions, such as opto-coupler open circuit, VCC pin voltage may rise to a very high level. To avoid IC damage caused by VCC pin over voltage condition, the SY5040 adopts an internal OVP threshold V_{VCC_OVP} , when V_{VCC} exceeds V_{VCC_OVP} threshold, the SY5040 will stop switching and enter auto-recovery mode.

Internal OTP

The SY5040 monitors die temperature in normal operating mode. Once die temperature rises above internal OTP threshold, IC will stop switching and enter auto-recovery mode.

Power Supply Design Guide

BUS Capacitor Calculation

Generally, the bulk capacitor C_{BUS} is selected according to below rules:

1~2uF per watt (input power)

$$C_{BUS_MIN} = (1.0 \cdot P_{IN}) \mu F$$

$$C_{BUS_MAX} = (2.0 \cdot P_{IN}) \mu F$$

Minimum BUS Voltage Calculation

The minimum BUS voltage appears when the input voltage V_{IN} is the lowest and the output current reaches the rated value.

Minimum BUS voltage at rated output power is calculated as:

$$V_{BUS_MIN} = \sqrt{2 \cdot V_{IN_MIN}^2 - \frac{P_O \cdot (1 - K_{CH})}{\eta \cdot C_{BUS} \cdot f_0}}$$

Where K_{CH} is BUS capacitor charge coefficient (generally K_{CH} is set to 0.2~0.3), η is converter efficiency, and f_0 is frequency of AC input.


Transformer Parameter Calculation

1) Primary/Secondary Turns Ratio: N_{PS}

N_{PS} is limited by the voltage stress of primary power MOSFET:


$$N_{PS} \leq \frac{V_{MOS_BR} \cdot K_{DR} - \sqrt{2} \cdot V_{IN_MAX} - \Delta V_{SN}}{V_O + V_{D_F}}$$

Where V_{MOS_BR} is the breakdown voltage of primary MOSFET; K_{DR} is V_{DS} de-rating factor of power MOS; V_{D_F} is forward voltage drop of secondary rectification diode; ΔV_{SN} is voltage spike during primary MOS turn off instant.

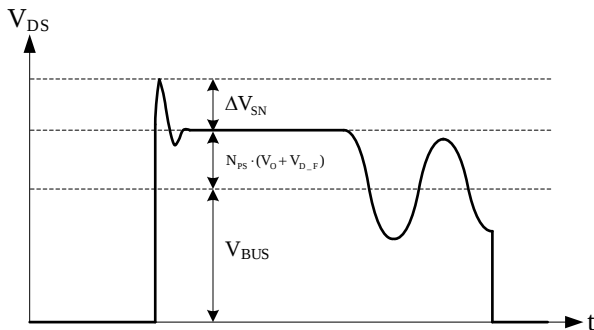

2) Primary Inductance: L_M

Transformer primary inductance is related with primary current ripple. Generally, primary side current ripple is defined as shown in below figure. And current ripple factor is defined as below equation:

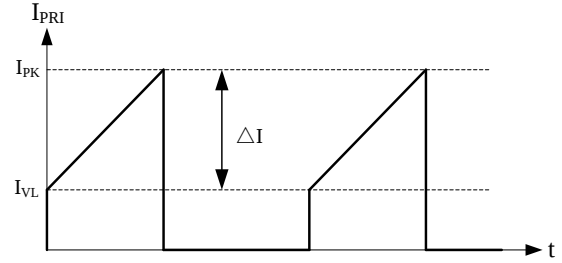

$$K_{RP} = \frac{0.5 \cdot \Delta I}{I_{PK} - 0.5 \cdot \Delta I}$$

$K_{RP} < 1$: CCM

$K_{RP} = 1$: DCM (QR mode)

Generally, to get the optimized transformer size and efficiency for universal input application, under low input and full load condition, CCM operating is selected, while under high input and full load condition, QR mode is selected.

Based on design experience, under the lowest input and full load condition, it is recommended to choose K_{RP} between 0.3~0.5 for optimized performance. And for an initial start, $K_{RP}=0.4$ is selected. Once K_{RP} is selected, primary inductance of transformer is calculated as equation below:

$$L_M = \frac{V_{BUS_MIN}^2 \cdot D_{MAX}^2 \cdot \eta}{2 \cdot P_O \cdot f_{SW} \cdot K_{RP}}$$

Where f_{SW} is rated switching frequency (65kHz), I_O is rated output current, η is converter efficiency. D_{MAX} is maximum duty cycle at V_{BUS_MIN} and rated output power, and D_{MAX} is calculated as below equation:

$$D_{MAX} = \frac{N_{PS} \cdot (V_O + V_{D_F})}{V_{BUS_MIN} + N_{PS} \cdot (V_O + V_{D_F})}$$

3) Turns of Primary Winding: N_P

(a) Select the magnetic core type, identify the effective cross-sectional area A_E

(b) Preset the maximum magnetic flux density B_{MAX} at rated output power

$$B_{MAX} = 0.22T \sim 0.28T$$

(c) Calculate maximum primary peak current I_{PK} at rated output power:

$$I_{PK} = \frac{V_O \cdot I_O \cdot (1 + K_{RP})}{V_{BUS_MIN} \cdot D_{MAX} \cdot \eta}$$

(d) Calculate primary turns: N_P

$$N_p = \frac{L_M \cdot I_{PK}}{B_{MAX} \cdot A_E}$$

Where A_E is effective cross-sectional area of core

4) Turns of Secondary Winding: N_s

$$N_s = \frac{N_p}{N_{PS}}$$

5) Turns of Auxiliary Winding: N_A

Before the calculate auxiliary turns, V_{CC} supply voltage $V_{CC(AUX)}$ by auxiliary winding should be predefined first. Generally, $V_{CC(AUX)}$ is set to 14V~18V, then auxiliary turns is calculated as:

$$N_A = \frac{V_{CC(AUX)} \cdot N_s}{V_O}$$

Peak Current Sense Resistor Calculation

Maximum peak current appears under minimum BUS voltage and maximum load condition (OCP point); maximum peak current is calculated as:

$$I_{PK_MAX} = \frac{V_O \cdot I_O \cdot K_{OCP} \cdot (1 + K_{RP})}{V_{BUS_MIN} \cdot D_{MAX} \cdot \eta}$$

Where K_{OCP} is OCP proportion, K_{OCP} is generally set to 120%~130%.

After the maximum primary peak current has been calculated, the peak current sense resistor R_{CS} can be easily derived by equation below:

$$R_{CS} = \frac{V_{CS_MAX}}{I_{PK_MAX}}$$

Where V_{CS_MAX} is the maximum allowed peak current sense voltage (typical=0.97V).

Note: Customer may need to fine tune current sense resistor according to the converter OCP point. If OCP point is larger than target level, R_{CS} should be tuned a little larger; If OCP point is smaller than target level, R_{CS} should be tuned a little smaller.

Secondary Diode Selection

Under the conditions of the maximum BUS voltage and maximum output voltage, the reverse voltage of secondary rectification diode will reach the maximum level. The maximum value of diode reverse voltage (ignore voltage spike when primary MOS is turned on) is calculated as equation below:

$$V_{D_R_MAX} = \frac{\sqrt{2} \cdot V_{IN_MAX}}{N_{PS}} + V_{O_OVP}$$

Where V_{IN_MAX} is maximum AC input voltage (RMS), N_{PS} is the primary/secondary turns ratio of the transformer and

V_{O_OVP} is output OVP threshold, which is predefined by customer.

Maximum instantaneous forward current is calculated as equation below:

$$I_{D_PK_MAX} = I_{PK_MAX} \cdot N_{PS}$$

Where I_{PK_MAX} is the maximum primary peak current at V_{BUS_MIN} and OCP point.

Average forward current of diode is

$$I_{D_AVG_MAX} = I_O \cdot K_{OCP}$$

Where I_O is rated output current, and K_{OCP} is OCP proportion to rated output current.


Layout Considerations

A proper PCB design must follow the below guidelines:

(a) To achieve a good EMI performance and to reduce the line frequency voltage ripples, the output of the bridge rectifier should be connected to the BUS line capacitor first, then to the switching circuit.

(b) The circuit loop of all switching circuit should be kept as small as possible: primary power loop, secondary power loop and auxiliary power loop.

(c) The connection of primary ground is recommended as:



Ground ①: Ground of BUS capacitor

Ground ②: Ground of bias supply capacitor

Ground ③: Ground of auxiliary winding

Ground ④: Ground of ZCS pin divider resistor

Ground ⑤: Ground of primary side Y capacitor

Ground ⑥: Ground of current sense resistor.


Ground ⑦: Ground of controller IC.

Ground ⑧: Ground of receiver of opto-coupler.

(d) Bias supply trace should be connected to the bias supply capacitor first and then to the GND pin. The bias supply capacitor should be put right beside the IC.

(e) The switching loop formed by 'Source pin – current sense resistor – GND pin' should be kept as small as possible.

(f) The resistor divider connected to ZCS pin is recommended to be put close to the IC.

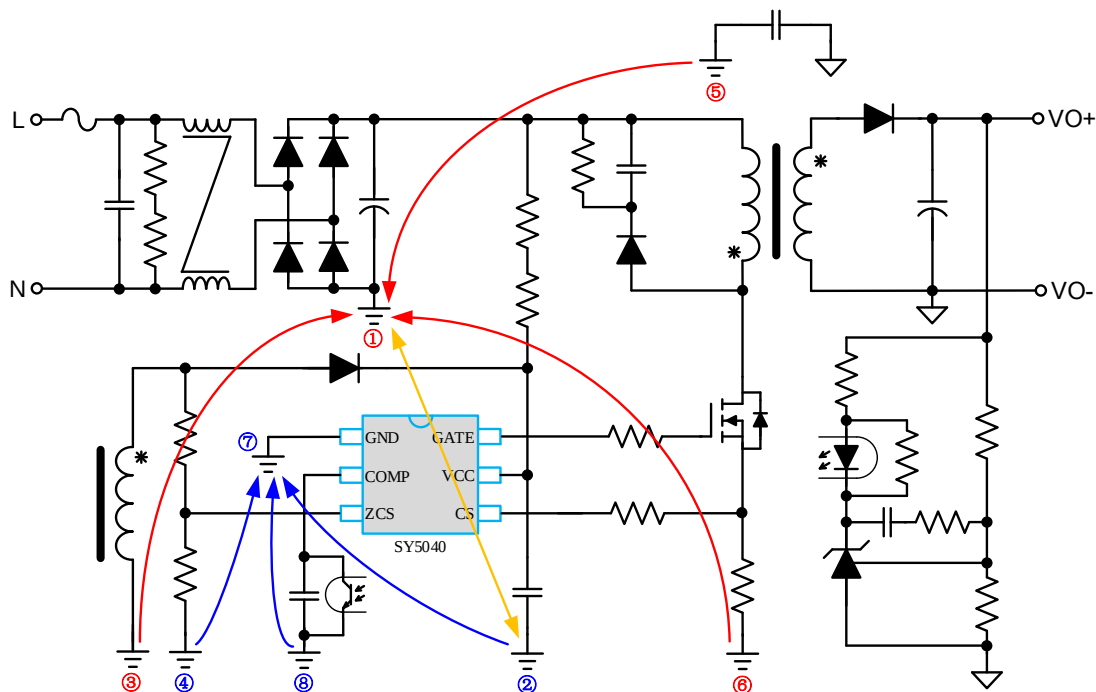

Design Example

A design example of typical application is shown below step by step.

Input/Output specification

Parameter	Symbol	Value
Input voltage range	V_{IN}	90V~264V
Rated output power	P_O	45W
Rated output voltage	V_O	20V
Output OVP level	V_{O_OVP}	24V
Rated output current	I_O	2.25A
OCP proportion	K_{OCP}	120%

Preset Parameter

Parameter	Symbol	Value
Break down voltage of power MOS	V_{MOS_BR}	650V
V_{DS} de-rating factor of power MOS	K_{DR}	90%
Spike on V_{DS} during power MOS turn off	ΔV_{SN}	100V
Converter efficiency		88%
Primary current ripple factor at V_{BUS_MIN} & rated output power	K_{RP}	0.4
BUS capacitor charge coefficient	K_{CH}	0.2
Secondary diode forward voltage drop	V_{D_F}	0.5V
Input brown out protection level (RMS)	V_{IN_BO}	70V
Transformer effective cross-sectional area (RM10)	A_E	98 mm ²

1) BUS Capacitor Selection

Calculate input power at rated output power

$$P_{IN} = \frac{P_O}{\eta} = \frac{45}{88\%} = 51.14W$$

Minimum BUS capacitor: $C_{BUS_MIN} = 1.0 \times 51.14 = 51.14\mu F$

Maximum BUS capacitor: $C_{BUS_MAX} = 2.0 \times 51.14 = 102.28\mu F$

Select BUS capacitor: $C_{BUS} = 82\mu F$

2) Minimum BUS Voltage Calculation

BUS capacitor charge coefficient: $K_{CH}=0.2$

$$V_{BUS_MIN} = \sqrt{2 \cdot V_{IN_MIN}^2 - \frac{P_O \cdot (1 - K_{CH})}{\eta \cdot C_{BUS} \cdot f_0}} = \sqrt{2 \cdot 90^2 - \frac{45 \cdot (1 - 0.2)}{88\% \cdot 82\mu \cdot 50}} = 79V$$

3) Transformer Design

(a) Calculate primary/secondary turns ratio: N_{PS}

$$N_{PS} \leq \frac{V_{MOS_BR} \cdot K_{DR} - \sqrt{2} V_{IN_MAX} - \Delta V_{SN}}{V_O + V_{D_F}} = \frac{650 \cdot 0.9 - \sqrt{2} \cdot 264 - 100}{20 + 0.5} = 5.5$$

N_{PS} is selected to: $N_{PS} = 5$

(b) Calculate maximum duty cycle: D_{MAX}

$$D_{MAX} = \frac{N_{PS} \cdot (V_O + V_{D_F})}{V_{BUS_MIN} + N_{PS} \cdot (V_O + V_{D_F})} = \frac{5 \cdot (20 + 0.5)}{79 + 5 \cdot (20 + 0.5)} = 56.5\%$$

(c) Calculate primary inductance: L_M

$$L_M = \frac{V_{BUS_MIN}^2 \cdot D_{MAX}^2 \cdot \eta}{2 \cdot V_O \cdot I_O \cdot f_{SW} \cdot K_{RP}} = \frac{79^2 \cdot 56.5\%^2 \cdot 88\%}{2 \cdot 20 \cdot 2.25 \cdot 65 \cdot 1000 \cdot 0.4} = 749.2\mu H$$

Select $L_M = 750\mu H$

(d) Calculate primary peak current at rated output power:

$$I_{PK} = \frac{V_O \cdot I_O \cdot (1 + K_{RP})}{V_{BUS_MIN} \cdot D_{MAX} \cdot \eta} = \frac{20 \cdot 2.25 \cdot (1 + 0.4)}{79 \cdot 56.5\% \cdot 88\%} = 1.60A$$

(e) Calculate primary winding turns: N_P

Transformer core effective cross-sectional area: $A_E = 98 \cdot 10^{-6} m^2$

Maximum allowed flux density: $B_{MAX} = 0.27T$

$$N_P = \frac{L_M \cdot I_{PK}}{B_{MAX} \cdot A_E} = \frac{750\mu \cdot 1.6}{0.27 \cdot 98 \cdot 10^{-6}} = 45.35$$

Select primary winding turns: $N_P=45$

(f) Calculate secondary winding turns: N_S

$$N_S = \frac{N_P}{N_{PS}} = \frac{45}{5} = 9$$

Select secondary winding turns: $N_S=9$

(g) Calculate auxiliary winding turns: N_A

VCC supply voltage from auxiliary winding is set to: $V_{CC(AUX)}=16V$

$$N_A = \frac{V_{CC(AUX)} \cdot N_S}{V_O} = \frac{16 \cdot 9}{20} = 7.2$$

Select auxiliary winding turns: $N_A=7$

(h) If other transformer core type is selected, then recalculate (e)~(g).

4) Current Sense Resistor Calculation:

$$I_{PK_MAX} = \frac{V_O \cdot I_O \cdot K_{OCP} \cdot (1 + K_{RP})}{V_{BUS_MIN} \cdot D_{MAX} \cdot \eta} = \frac{20 \cdot 2.25 \cdot 120\% \cdot (1 + 0.4)}{79 \cdot 56.5\% \cdot 88\%} = 1.92A$$

$$R_{CS} = \frac{V_{CS_MAX}}{I_{PK_MAX}} = \frac{0.97}{1.92} = 0.505\Omega$$

5) Secondary Diode Selection

(a) Maximum reverse voltage calculation:

$$V_{D_R_MAX} = \frac{\sqrt{2} \cdot V_{IN_MAX}}{N_{PS}} + V_{O_OVP} = \frac{\sqrt{2} \cdot 264}{5} + 24 = 98.7V$$

Considering the voltage spike, reverse voltage rating of the diode is recommended to be 120V~150V.

(b) Maximum instantaneous forward current:

$$I_{D_PK_MAX} = N_{PS} \cdot I_{PK_MAX} = 5 \cdot 1.92 = 9.6A$$

(c) Maximum average forward current:

$$I_{D_AVG_MAX} = I_O \cdot K_{OCP} = 2.25 \cdot 120\% = 2.7A$$

6) Calculate ZCS Pin Resistor Divider

(a) Firstly, calculate upper resistor: R_H

Predefined input voltage browns out protection level: $V_{IN_BO}=70V$

$$R_H = \frac{\sqrt{2} \cdot V_{IN_BO}}{I_{BO}} \cdot \frac{N_A}{N_P} = \frac{\sqrt{2} \cdot 70}{100\mu} \cdot \frac{7}{45} = 154k\Omega$$


Select $R_H=150k$

(b) After R_H is determined, then calculate lower resistor: R_L


$$R_L = \frac{1}{\frac{V_{O_OVP}}{V_{ZCS_OVP}} \cdot \frac{N_A}{N_S} - 1} \cdot R_H = \frac{1}{\frac{24}{2} \cdot \frac{7}{9} - 1} \cdot 150k = 18k\Omega$$

Select $R_L=18k$


SOT23-6 Package Outline & PCB Layout Design

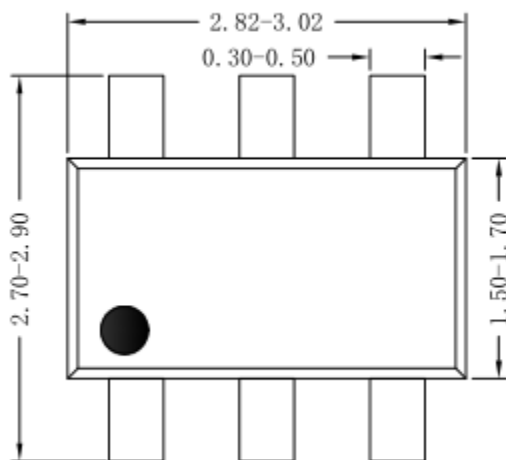


Top View

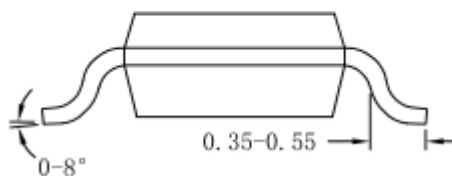

Side View

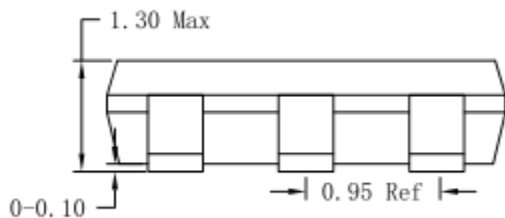

Side View

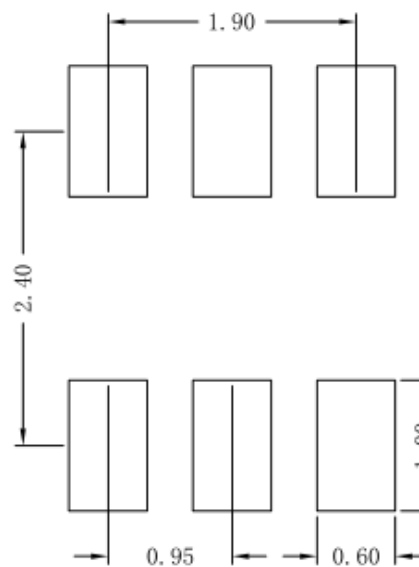


Recommended Pad Layout


Notes: All dimension in millimeter and exclude mold flash & metal burr.

Taping & Reel Specification

1. Taping orientation for packages (SOT23-6)

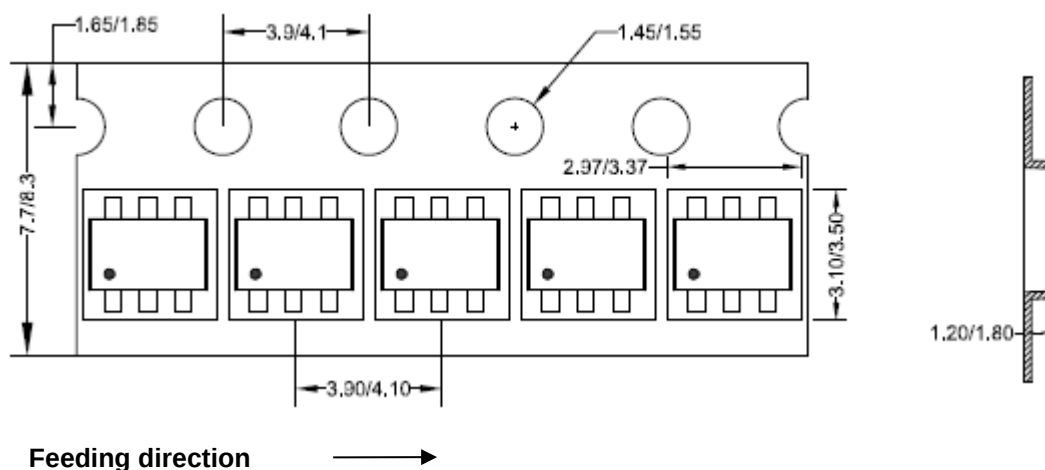

2. Carrier Tape & Reel specification for packages

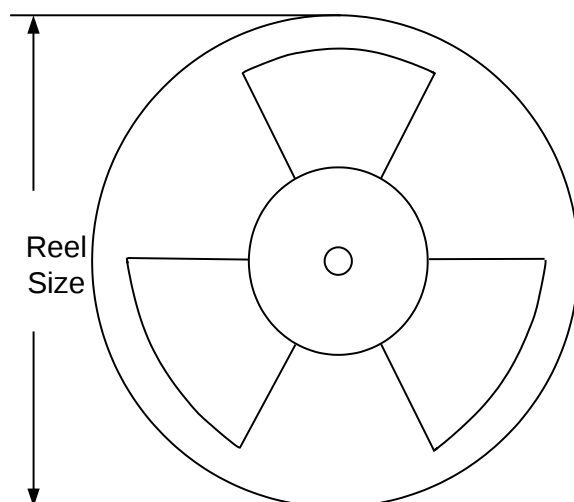

Package type	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel
SOT23-6	8	4	7"	280	160	3000

Revision History

The revision history provided is for informational purpose only and is believed to be accurate, however, not warranted. Please make sure that you have the latest revision.

Date	Revision	Change
June 21, 2024	Revision 1.0A	1, Add dynamic ZCS/CS pin negative voltage/current capability; 2, Add the specification for ISEN pin short circuit protection(VCS_SCP, TCS_SCP_BLK) in EC table
August 7, 2019	Revision 0.9	Initial Release

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

©2024 Silergy Corp.

All Rights Reserved.